


Socket / Switch / Wiring System



Safewire 2019/2020 Brochure

WENZHOU SAFEWIRE ELECTRIC CO.,LTD.
FEILIFU TECHNOLOGY CO.,LTD (Stock No.870361)

📍 Office&Showing room: No.152 Xinguang Road, Xinguang industry zone, Liushi town, Yueqing, Wenzhou, China ,325604

📍 Socket factory: No.18, Chunhui Rd, Yongan Industrial Zone, Xianju County, Taizhou City, Zhejiang, China 317300 ,

📍 Switch factory: No. 33 Middle Industrial Avenue, Xiaolan, Zhongshan, Guangdong, China

☎ 0086-577-61725369 0086-18612380398

✉ info@safewirele.com; happyhe@safewirele.com



For more details,
please visit:
www.safewirele.com
or scan this QR code.

About Us

Factory

Stock No:870361



Automatic comprehensive production system

Mold Making
Injection
Die Casting
Lathing
Assembling
Painting
Polishing
Punching

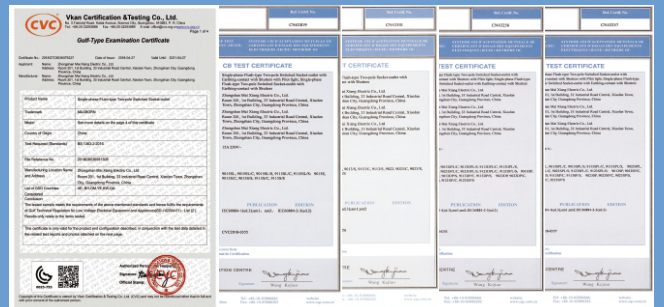
CQC Qualified Test Center

ISO 9001,ISO14001 OHSAS System




Socket CE Certificated by TUV,Germany

Switch CB/GCC Certificate



Floor Outlet Socket/Desktop Socket/Service Power Grommets



FD-777

IP55 4 ways stainless/Brass floor box

- 1). ultrathin plate Static pressure over 1000 N, Rotating modules mechanism, Soft silica pad
- 2). Color optional: Golden(Brass), Silver(Stainless);
- 3). Capacity: Max. 4;
- 4). Panel Dimension (L×W)(mm): 143×136;
- 5). Cutout(mm): 120×114.



HTD-1/HTD-1L+ZN

IP44 3 ways brass/Aluminum Pop up socket

- 1). IP44 Protect level;
- 2). Panel (mm): 120×120;
- 3). Cut out(mm): 103×103;
- 4). Capacity: Max. 3.



HTD-2/HTD-2P+ZN

Ultrathin 3 Ways Brass/stainless Pop Up Socket

- 1). Panel size(mm): 120×120;
- 2). Cut out(mm): 103×103;
- 3). Module Capacity: Max. 3.



HTD-3/HTD-3P+ZN

3 ways brass/stainless Round pop up socket

- 1). Panel size(mm): Diameter(mm): φ150;
- 2). Cut out(mm): 103×103;
- 3). Capacity: Max. 3.



HTD-7/HTD-7L+ZN

3 ways brass/Aluminum Round pop up socket

- 1). Panel size(mm): φ150;
- 2). Cut out(mm): 103×103;
- 3). Capacity: Max. 3.



HTD-16/HTD-16L+ZN

3 ways Brass/Aluminum Pop up socket

- 1). Panel size(mm): 120×120;
- 2). Cut out(mm): 103×103;
- 3). Capacity: Max. 3.



HTD-18/HTD-18L+ZN

3 ways Brass/Aluminum Pop up socket

- 1). Panel size(mm): 128×120;
- 2). Cut out(mm): 103×103;
- 3). Capacity: Max. 3.



HTD-26/HTD-26L+ZN

4 ways Brass/Aluminum Pop up socket

- 1). Panel size(mm): 146×146mm;
- 2). Cut out(mm): 123×123;
- 3). Capacity: Max. 4.



HTD-28/HTD-28L+ZN

4 ways Brass/Aluminum Pop up socket

- 1). Panel size(mm): 154×146mm;
- 2). Cut out(mm): 123×123;
- 3). Capacity: Max. 4.



HTD-1602/HTD-1602L+ZN

IP44 Duplex 6 ways Brass/Aluminum pop up socket

- 1). Splash proof IP44 protect level;
- 2). Cut out(mm): 203×103;
- 3). Capacity: Max. 6.



FD-221

3 ways ultrathin brass Push button pop up socket

- 1). Panel size(mm): 120×120;
- 2). Cut out(mm): 103×103;
- 3). Capacity: Max. 3.



HTD-101/HTD-101P

1 Gang Brass/Stainless Single flap up socket

- 1). Capacity: Max. 2;
- 2). Dimension (L×W×H)(mm): 81×102×50;
- 3). Cut-out: apacity: 75×77.



HTD-102/HTD-102P

2 Gang Brass/Stainless Duplex flap up socket

- 1). Capacity: Max. 4;
- 2). Dimension (L×W×H)(mm): 147×102×50;
- 3). Cut-out: apacity: 135×77.



HTD-103

3 ways nano technology material polish Flip up socket

- 1). Panel Material: Nano-technology material;
- 2). Panel size(mm): 90×90mm;
- 3). Cut out(mm): 80×77x50;
- 4). Capacity: Max. 3.



HTD-8/HTD-8P

6 ways Brass/Stainless ,bottom box height less than 50mm flap socket

- 1). Panel size(mm): 125×125;
- 2). Cut out(mm): 103×103×48;
- 3). Capacity: Max. 6.

junction box/power box/ground tank



HTD-140YK/YNKP

2 ways Brass /Stainless Round panel of 140*140mm floor box


- 1). Panel Dimension(mm): 140×140;
- 2). Cutout(mm): 125x125x60;
- 3). Capacity: 2 .



HTD-160LX/LXP

3 ways Brass/stainless Round panel of 160*160mm floor box

- 1). Panel Dimension(mm): 160×160;
- 2). Cutout(mm): 148x148x60;
- 3). Capacity: 3 .



HTD-130LX/LXP

2 ways Brass /Stainless Round panel of 130*130mm floor box

- 1). Panel size(mm): 130×130;
- 2). Cutout(mm): 122x122x60;
- 3). Capacity: 2 .



HTD-127ZAP

3 ways Brass/stainless Round panel of 127*127mm floor box

- 1). Panel size(mm): 127×127;
- 2). Cutout(mm): 111x111x60;
- 3). Capacity: Max: 3.

Junction box/Power box/Ground tank

 <p>HTD-120K(P)/HTD-120NK(P) 3 ways Brass/Stainless panel of 120*120mm Floor box 1).Panel Dimension(mm):120*120; 2).Cutout(mm):103x103x65; 3).Capacity: 3; 4).Mounting type:Mounting ST optical fiber or SC optical fiber 5).HTD-120K/HTD-120NK: lid with base box as 90/180 degree.</p>	 <p>HTD-145K/CK 8 ways Horizontal/decling Brass panel of 210*145 mm Floor box 1).Panel Dimension(mm):210*145; 2).Cutout(mm):203x138x65; 3).Capacity: 8 for CK ; 10 for K; 4).Mounting board:ST optical fiber or SC optical fiber.</p>
 <p>HTD-146K(P)/HTD-146NK(P) 6 ways Brass/Stainless panel of 146*146mm Floor box 1).Panel Dimension(mm):146*146; 2).Cutout(mm):138x138x65; 3).capacity: 6; 4).Mounting type:Mounting ST optical fiber or SC optical fiber 5).HTD-146K/HTD-146NK: lid with base box as 90/180 degree.</p>	 <p>HTD-180K(P)/HTD-180NK(P)/HTD-180AK(P) 10 ways Horizontal installation Brass/Stainless panel of 180*180mm Floor box 1).Panel Dimension(mm):180*180; 2).Cutout(mm):173x173x65; 3).Capacity: 10; 4).HTD-180K/HTD-180NK : lid with base box as 90/180 degree.HTD-180AK/EAK: cavity with depth of 20 mm.</p>
 <p>HTD-210K(P)/HTD-210NK(P)/HTD-210AK(P) 15 ways Horizontal installation Brass/Stainless panel of 210*210mm Floor box 1).Panel Dimension(mm):210*210; 2).Cutout(mm):198x198x70; 3).Capacity: 15; 4).HTD-210K/HTD-210NK : lid with base box as 90/180 degree.HTD-210AK/AKP: cavity with depth of 20 mm.</p>	 <p>HTD-210CK/HTD-210CKP 10 ways decling installation Brass/Stainless steel panel of 210*210 mm Floor box 1).Panel Dimension(mm):250*180; 2).Cutout(mm):193x193x65; 3).Capacity: 10.</p>
 <p>HTD-250K(P)/HTD-250AK(P) 18 ways Horizontal installation Brass/Stainless panel of 250*250mm Floor box 1).Panel Dimension(mm):250*250; 2).Cutout(mm):233x233x75; 3).Capacity: 18; 4).HTD-250AK is with cavity with depth of 20 mm.</p>	 <p>HTD-251CK/HTD-251CKP 10 ways decling installation Brass panel of 250*180 mm Floor box 1).Panel Dimension(mm):250*180; 2).Cutout(mm):240x170x75; 3).Capacity: 8.</p>
 <p>HTD-2702K 12 ways Horizontal installation Brass panel of 270*146 mm Floor box 1).Panel Dimension(mm):270*146; 2).Cutout(mm):263x138x75; 3).Capacity: 12.</p>	 <p>HTD-300K/HTD-300KP 12 ways Horizontal installation Brass /Stainless panel of 300*150 mm Floor box 1).Panel Dimension(mm):300*150; 2).Cutout(mm):293x143x75; 3).Capacity: 12.</p>
 <p>HTD-302AL 6 ways side mounting receptacle 80mm cavity Aluminum Alloy floor box with pop up mechanism 1).Surface finish:Sand blasting; 2).Panel Dimension(mm):210*140; 3).Cutout(mm):193x123x65; 4).Capacity: 6.</p>	

Underfloor box/raised floor box/cavity carpet box








 <p>HTD-622-AS/SS/SP 8 ways ABS Panel:169*145mm , heigth adjustable for raised floor or concrete floor 1).Panel Material:ABS; galvanized insert into frame skirt with static pressure force over 1000N ; 2).8mm Recess Lid; 3).Carpet cut out (mm):161*133; 4).Capacity: Max.8 45*45mm; 5).AS :empty cover middle filled with materials ; SS :with plastic plate, SP : with Stainless plate.</p>	 <p>HTD-624-AS/SS/SP 12 ways ABS Panel :245*225mm, height adjustable for raised floor or concrete floor 1).Panel Material:ABS; galvanized insert into frame skirt with static pressure force over 1000N ; 2).8mm Recess Lid; 3).Carpet cut out (mm):213*233; 4).Capacity: Max.12 way 45*45mm or 4 gang 86 switch socket; 5). AS :empty cover middle filled with materials ; SS :with plastic plate, SP : with Stainless plate.</p>
 <p>HTD-626-AS/SS/SP 16 ways galvanized steel box and ABS Panel : 320*230 mm for trunking system or concrete floor 1).Panel Material:ABS; galvanized insert into frame skirt with static pressure force over 1000N ; 3).8mm Recess Lid; 4).Carpet cut out(mm): 308*213; 6).Capacity: Max.16 way 45*45mm or 2 gang 86*86 switch socket+ 2 146*86 twin/duplex switch socket; 7).AS :empty cover middle filled with materials ; SS :with plastic plate, SP : with Stainless plate.</p>	 <p>HTD-628-AS/SS/SP 16 ways ABS bottom box and Panel :328*230 mm ,height adjustable for raised floor or concrete floor 1).Panel Material:ABS; galvanized insert into frame skirt with static pressure force over 1000N ; 3).8mm Recess Lid; 4).Carpet cut out (mm): [L*W]:308*213; 6).Capacity: Max.16 45*45mm ; 7). AS :empty cover middle filled with materials ; SS :with plastic plate, SP : with Stainless plate.</p>
 <p>HTD-624B underfloor boxes :287*169 mm , side-mounting 86 type , galvanized steel box height 85mm for trunking system 1).Panel Material:ABS, frame skirt with galvanized steel insert increase box pressure force over 1000N; 2).Overall frame & lid(mm): 245*225; 3).Frame lid recess:8mm; 4).Carpet cut out: [L*W]:213*233mm²; 5).Capacity: side mounting 4 gang 86 type bridge . 6).Bottom box:Galvanized steel box height over 85mm.</p>	 <p>HTD-610S 3 ways Multi-media floor box height adjustable with cable exit for raised floors 1).Panel size(mm): Diameter(mm):φ118; 2).Depth(mm):81; 3).Cut out(mm):φ110; 4).Capacity:Max.3; 5).Depth: 81mm ~ 101mm; 6).The degree between modules and base box be rotate over 20 degree; Applicable for raised floor system with cable out exit .</p>

Carpet floor box/screed floor box/compartiment cavity floor box

 <p>SCF-A01 BS standard 8mm lid recess 3 compartment Cavity floor box 1).Frame & Lid(mm):272*272; 2).Cut out size(mm):254*254 ; 3).Frame lid recess(mm):8 ; 4).Material:bottom Contain: Galvanised steel; Frame lid: ABS ;bod bottom box:Galvanised steel 5).Capacity: 3 compartment.</p>	 <p>SCF-T01 BS standard 10mm lid recess 3*86 type Cavity floor box 1).Frame & Lid(mm):272*272; 2).Floor Cut Out(mm):254*254 ; 3).Frame Lid Recess(mm):10; 4).Material:bottom Contain: Galvanised steel; Frame lid: ABS ;bod bottom box:Galvanised steel 5).Capacity: 3*86 type.</p>
 <p>SCF-Q01 BS standard 8mm lid recess 3 compartment cavity floor box 1).Frame & Lid(mm):272mm * 272; 2).Cut out size(mm):254*254; 3).Frame lid recess(mm):8; 4).Material:Contain bottom : Galvanised steel ; Frame lid:ABS;shell &pole of bottom boxes:aluminum ; 5).Capacity: 3 compartment.</p>	 <p>SCF-F01 BS standard 8/10 mm recess 3 compartment cavity floor box 1).Frame & Lid(mm):320mm *320 ; 2).Cut out size(mm):254*254 ; 3).Frame lid recess(mm):8~10; 4).Material : Cover panel: Epoxy coated aluminum alloy ;bottom box body: Galvanised ,shell &pole of bottom boxes :aluminum ; 5).Capacity: 3 compartment.</p>























Office furniture socket/OPDU/Table modular





















































 <p>FZ-501 embedded desktop socket 1).Panel size(mm):φ110; 2).Deepth(mm):81 3).Cut out(mm):φ102; 4).Capacity:Max.3; 5).Plastic bottom case with removeable cable kit , applicable for φ60/φ80/φ100 hole of desktop.</p>	 <p>FZ-536 Embedded desktop socket 1).Panel size(mm): 220*110 2).Cut out(mm):202*88 3).Surface finish:Grey plastic sand streak surface Power painting; 4).Capacity:Max.6; 5).Cover plate is embedded into body when use.</p>
 <p>FZ-515 Flip up aluminum body desktop socket 1).Panel size(mm):170*123; 2).Color:Silver or black is optional; 3).Cut out(mm):148*115; 4).Capacity:4.</p>	 <p>FZ-518 Integrated moulding aluminum, plastic bottom case with damping device Pop up desktop socket 1).Panel size(mm):194*140; 2).Color:Silver or black is optional; 3).Surface finish: Anodised; 4).Cut out(mm):183*132; 5).Capacity:4.</p>
 <p>FZ-517 Integrated moulding aluminum ,pop up desktop socket with PC box 1).Material:Aluminium alloy; Box: PC 2).Color:Silver / black/white is optional; 3).Surface finish: Power painting; 4).Height(mm):135; 5).Panel(mm):240x120; 6).Cut out(mm):231x112; 7).Capacity: 6.</p>	 <p>FZ-510 Flip up socket with Qi standard wireless charge desktop 1).Panel size(mm):165*125; 2).Cut out(mm):147*114; 3).Capacity:4 way 23*36mm+2 USB; 4).Material: wirdrawing Anodised aluminum; 5).Full-voltage USB smart quick charge,QC3.0; QUALCOMM identification chip, power conversion rate >80%, variety of intelligent protection including overcharge /over-temperature /overvoltage /short circuit /under-voltage/ overload etc.</p>
 <p>FZ-521 Aluminum alloy Flush-mounting single flap lid desk socket 1).Surface color: Silver /Matt Black 2).Height of bottom box(mm):75 3).Panel(mm):265x130 4).Cut out(mm):254x116 5). Modules capacity: 9.</p>	 <p>FZ-522 Aluminum alloy Flush-mounting single flap lid desk socket 2).Surface color: Silver /Matt Black 3).Height of bottom box (mm):62 4).Panel(mm):245x130 5).Cut out(mm):223x110; 7).Standard Modules capacity: 9.</p>
 <p>FZ-525 Dual side open aluminum alloy flip up desk-top box 1).Surface finished: wirdrawing Anodised; 2).Color: Silver /Matt Black 3).Height(mm):118 4).Panel(mm):340x150 5).Cut out(mm):312x132; 6).Capacity: 8 ways.</p>	 <p>FZ-528 Flush-mounting Aluminum alloy duplex flap lid desk socket 1).Color: Silver /Matt Black 2).Surface finish: Power painting; 3).Height of bottom box (mm):62 4).Panel(mm):365x130 5).Cut out(mm):254x116; 6).Capacity: 8.</p>
 <p>FZ-561 Electric motor rotate hidden socket 1).Panel size: W*D*H: 403*110*103mm; 2).Module Capacity:Max. 10(Customized); 3).With light indicator ; 4).Configurations& wire length customization 5).Photoelectric lock of detector and emitter.</p>	 <p>FZ-PFB01 Slide coverplate desktop socket 1).Panel size(mm): 95*94; 2).Cut out(mm):80; 3).Thickness of coverplate(mm):8 4). Slide coverplate surface finish by Power painting.</p>

 <p>FZ-507 Anodised aluminum Screen Mounting Power Distribution Unit</p> <ol style="list-style-type: none"> 1).Panel size(mm): 233*62 2).Cut out(mm):225*55 3).Color: White/black; 4).Module Capacity:6; 5).Plastic Material of modules: Flame retardant PC ; Wall mounting facility: optional . 	 <p>FZ-508 Anodised aluminum Table clamped Power Distribution Unit</p> <ol style="list-style-type: none"> 1).Materials:Aluminium extruded sections ; 2).Color:Silver/white/black ; 3).Capacity: 8; 4).Dimension of product:L*W (mm):45*62; 5).Thickness of table furniture: 10~45mm.
 <p>FZ-TB-B Screen clamped Power Distribution Unit</p> <ol style="list-style-type: none"> 1).Surface: Painted/Oxygenated; 2).Material: Aluminum alloy/steel 3).Configuration: customization 	 <p>FZ-551 Mobility-Installation Mini-cloumns aluminum stand pole socket</p> <ol style="list-style-type: none"> 1).Dimention(mm):H:1300 W:49.2 D:40; 2).Surface finish:Painted/Brushed Oxygenated; 3).Power supply side:single side; 4). Capacity : 10 ways 45*45mm 5).Configuration& cable length :customization.
 <p>FZ-520 Vertical aluminum liftable up socket</p> <ol style="list-style-type: none"> 1).Panel size(mm):φ100; 2).Capacity:Max.8(Customized); 3).Cut out(mm):φ80 4).Product dimension: (φ×H)(mm):120×252; 5). Configuration &cable length: customization. 	<p>POP Enginer FZ-526/527 Ip54 Vertical aluminum pop up socket with brass/Stainless coverplate</p> <ol style="list-style-type: none"> 1).Panel size(mm): φ124; 2).Capacity:Max.8(Customized); 3).Splash proof IP54 protect level; 4).Cut out(mm): :φ100 5).Product dimension: (φ×H)(mm):124×252.
 <p>FZ-531 Mobility-Installation Mini-cloumns single side aluminum stand pole socket</p> <ol style="list-style-type: none"> 1).Height (mm): 350/660; 2).Dimension(mm):73.5*147*135.3; 3).Surface finish:Painted/Brushed Oxygenated; 4).Power supply :single side. 	 <p>FZ-532 Mobility-Installation Mini-cloumns double side aluminum stand pole socket</p> <ol style="list-style-type: none"> 1).Height(mm): 350/660; 2).Dimension(mm):73.5*147*135.3; 3).Surface finish:Painted/Brushed Oxygenated; 4)Power supply :dual side.

Remark: (1)ZN:for soft damping device; (2)Available Sockets 45 type; (3)Compliance with IEC60884 GB/T23307; (4)plug and length of cable configuration is customization; (5) 2 way modules as 45×45mm; 1way module as 45×22.5mm.

Switch/Switch socket

 <p>1 Gang 1 Way Switch 1 Gang 2 Way Switch 9001AL / 9001BL (with LED light) 9001A / 9001B (with fluorescent light)</p>	 <p>2 Gang 1 Way Switch 2 Gang 2 Way Switch 9002AL / 9002BL (with LED light) 9002A / 9002B (with fluorescent light)</p>	 <p>3 Gang 1 Way Switch 3 Gang 2 Way Switch 9003AL / 9003BL (with LED light) 9003A / 9003B (with fluorescent light)</p>	 <p>4 Gang 1 Way Switch 4 Gang 2 Way Switch 9004AL / 9004BL (with LED light) 9004A / 9004B (with fluorescent light)</p>
 <p>1 Gang Intermediate Switch 9001DL (with LED light) 9001D (with fluorescent light)</p>	 <p>2 Gang Intermediate Switch 9002DL (with LED light) 9002D (with fluorescent light)</p>	 <p>1 Gang Bell Push Switch 9001PL (with LED light) 9001P (with fluorescent light)</p>	 <p>1 Gang Doorbell Control Switch Inside (DO NOT DISTURB) 9001LMH (with LED light) 9001MH (with fluorescent light)</p>
 <p>2 Gang Bell Push Switch 9002PL (with LED light) 9002P (with fluorescent light)</p>	 <p>2 Gang Doorbell Control Switch Inside (DO NOT DISTURB & MAKE UP ROOM) 9002LMH (with LED light) 9002MH (with fluorescent light)</p>	 <p>3 Gang Doorbell Control Switch Inside (DO NOT DISTURB & PLEASE WAIT & MAKE UP ROOM) 9003LMH (with LED light) 9003MH (with fluorescent light)</p>	
 <p>1 Gang 1 Way Switch 1 Gang 2 Way Switch 9011AL / 9011BL (with LED light) 9011A / 9011B (with fluorescent light)</p>	 <p>2 Gang 1 Way Switch 2 Gang 2 Way Switch 9012AL / 9012BL (with LED light) 9012A / 9012B (with fluorescent light)</p>	 <p>3 Gang 1 Way Switch 3 Gang 2 Way Switch 9013AL / 9013BL (with LED light) 9013A / 9013B (with fluorescent light)</p>	 <p>4 Gang 1 Way Switch 4 Gang 2 Way Switch 9014AL / 9014BL (with LED light) 9014A / 9014B (with fluorescent light)</p>
 <p>1 Gang Intermediate Switch 9011DL (with LED light) 9011D (with fluorescent light)</p>	 <p>2 Gang Intermediate Switch 9012DL (with LED light) 9012D (with fluorescent light)</p>	 <p>1 Gang Doorbell Control Switch Inside (DO NOT DISTURB) 9011LMH (with LED light) 9011MH (with fluorescent light)</p>	 <p>1 Gang Bell Push Switch 9011PL (with LED light) 9011P (with fluorescent light)</p>
 <p>2 Gang Bell Push Switch 9012PL (with LED light) 9012P (with fluorescent light)</p>	 <p>2 Gang Doorbell Control Switch Inside (DO NOT DISTURB & MAKE UP ROOM) 9012LMH (with LED light) 9012MH (with fluorescent light)</p>	 <p>3 Gang Doorbell Control Switch Inside (DO NOT DISTURB & PLEASE WAIT & MAKE UP ROOM) 9013LMH (with LED light) 9013MH (with fluorescent light)</p>	

	1 Gang 20A DP Switch with Indicator 9020		1 Gang 45A DP Switch with Indicator 9045		1 Gang 32A DP Switch with Indicator 9032		1 Gang 10A Double 2 Pins Switched Socket 9022S		1 Gang 13A 1 Gang 13A DP Switched Socket 9013SP / 9013DP
	1 Gang 13A Universal Switched Socket 9013SS		1 Gang 13A Universal Switched Socket with 2*USB 90133SU		1 Gang 13A 1 Gang 13A DP Switched Socket with 2*USB 9013SPU / 9013DPU		1 Gang 15A Switched Socket 9015S		1 Gang 13A 2 & 3 Pins Universal Switched Socket 90135S
	1 Gang 13A 1 Gang 13A DP Switched Socket with Indicator 9013SPL / 9013DPL		1 Gang 13A Unswitched Socket 9013		1 Gang 15A Switched Socket with Indicator 9015SL		1 Gang 13A DP Switched Cable Outlet with Indicator & Fuse 9013DF		1 Gang 15A Shaver Socket 110V/230V 9086TX
	1 Gang 3A 1 Gang 13A Unswitched Cable Outlet with Fuse 9003F / 9013F		1 Gang PCBA TV Socket 9001TP		1 Gang TV Socket 9001TV		1 Gang SAT Socket 9001TX		SAT & TV Socket 9002T
	1 Gang Infrared Sensor with Fire Emergency Load (3 Line) 9003HWX		1 Gang Touch Delay Switch with Fire Emergency Load (3 Line) 9003CMX		1 Gang Sound & Light Sensor with Fire Emergency Load (3 Line) 9003SGX		Cat6 Data & TV Socket 9002NT		Telephone & TV Socket 9002HT
	1 Gang Telephone Socket 9001DH		1 Gang Cat6 RJ45 Data Socket 9001DN		2 Gang Telephone Socket 9002DH		2 Gang 2*Cat6 Data Socket 9002DN		Telephone & Cat 6 Data Socket 9002HN
	1 Gang Audio Socket 9001YX		SAT & TV & FM Socket 9003T		2 Gang Audio Socket 9002YX		1 Gang 500W (2 Line) 100W (2 Line) Light Dimmer 9001TG5 / 9001TG1		1 Gang CV Fan Dimmer 250W (2 Line) 9001TS
	1 Gang 25A High Frequency Hotel Key Card Switch (3 Line) 9025GP		1 Gang 25A Low Frequency Hotel Key Card Switch (3 Line) 9025DP		1 Gang 25A Photoelectric Hotel Key Card Switch (3 Line) 9025GD		1 Gang Footlight with Infrared Sensor 9001DJ		1 Gang 20A Cable Outlet 9020J
	1 Gang 45A Cable Outlet 9045J		1 Gang HDMI Cable Outlet 9001GQ		1 Gang Blank Plate 9086KB		1 Gang 16A German Socket 9016		2 Gang 16A German Socket 9026
	2 Gang 13A 2 Gang 13A DP Switched Socket with Indicators 9023SPL / 9023DPL		Cooker Control Unit with 13A Socket & Indicators 90CCU		2 Gang 13A Unswitched Socket 9023		2 Gang 13A 2 Gang 13A DP Switched Socket 9023SP / 9023DP		
	1 Gang 45A DP Large Switch with Indicator 9045L		1 Gang 20A Shaver Socket 110V/230V Large 90146TX		2 Gang Blank Plate 90146KB				

Remark: (1)CB/GCC/certificated
(2)PC/Aluminum stainless steel is optional.

1. Sink Box

Item									
	FD100LH	HTD-120JH	HTD-200JH	HTD-100JH	HTD-122JH	HTD-122LH	HTD-160LH-50F	HTD-110JH	HTD-135JH
Dimension	100X100X50mm	120X120X60mm	100X200X55mm	100X100X55mm	122X122X58mm	122X122X60mm	160X160X60mm	110X110X75mm	135X135X75mm
Item									
	HTD-170JH	HTD-170JHA	HTD-190JH	HTD-190JHA	HTD-230JH	HTD-230JHA	HTD-290JH	HTD-190CJH	HTD-240CJH
Dimension	170X170X75mm	170X170X90mm	190X190X75mm	190X190X90mm	230X230X75mm	230X230X90mm	290X140X75mm	190X190X75mm	240X170X75mm

2. Color Sample(Remark:or refer to RAL or Pantone)

Br:Brass H62	P:stainless 304	L:aluminum alloy	Ch:chrome	NK:nickel	Zl:zinc	Pd:powderpeal black	BZ:bronze

3. Plate

2 way single socket plate SAB86×86	2 way single socket plate SAB86×146	Desktop plate SADF01	Twin switch socket plate SAP01	4 way perella data plate SAP02	blank plate SAP03

4. 45×45mm Module as Specification Legrand's Mosaic Series

F2 2 pin socket	F3 3 pin socket	F4 multi function socket	F5 Swiss socket	F6 Israel socket	F8 USB charging, 5V,2.1A	F9 USB charging, 5V,2.1A	F11 BS 13A socket	F15 Euro(Schuko) socket	F16 French Socket	F18 American socket	F21 Cat 5e RJ45
F21B Cat 6 RJ45	F23 Rj11 Telephone socket/CAT3	F50 Single male TV socket	F51 BNC socket	F52 Φ3.5 earphone	F53 DIN (eight pins)	F55 Audio socket	F56 Vedio socket	F58 Sound socket	F59 USB for data 2.0	F60 Male Kalon socket	F62 Speaker socke
F65 15 Pins VGA (male type)	F66 15 Pins VGA (female type)	F67 9 Pins VGA (male type)	F68 9 Pins VGA (female type)	F69 HDMI	F70 Empty plate	F71 S terminal	F80 1 gang 1 way switch	F81 1 gang 2 way switch	F82 2 gang 1 way switch	F83 2 gang 2 way switch	

5. Optical fiber patch cord/cable (FC-FC,FC-SC,SC-SC,ST-ST.....)& Accessories.

RJ45 Patch Cord In Yellow Color	RJ45 Patch In Gray Color	RJ45 Patch Cord In Blue Color	RJ45 Patch Cord In Green Color	SC-SC Single-mode Patch Cord	SC-SC Multi-mode Patch Cord	ST-ST Single-mode Patch Cord	FC-SC Single-mode Patch Cord	LC-LC Single-mode Patch Cord
single face plate	dual-port face plate	3-port face plate	4-port face plate	Nylon /stainless/cable tie				