



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Open coverplate

PRODUCT No. : HTD-101

ADD: 152 xinguang industrial zone, yueqing city, zhejiang province

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604



Technical parameters:

1. The environment temperature: $-5^{\circ}\text{C}\sim/40^{\circ}\text{C}$
2. The rated voltage : 100V $\sim\sim$ 250V
3. Rated current : 10A、 13A、 16A、 20A



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

1	Model	HTD-101	7	Market standard	Customized
2	Brand Name	Safewire or OEM brand	8	Place of origin	Zhejiang , Wenzhou, China
3	Type	floor socket	9	Frequency	50Hz~60Hz
4	Color	Golden, silver, etc	10	Current Type	AC
5	Grounding	Standard grounding			
6	HS Code	8536690000			



Wenzhou Safewire Electric Co.,Ltd.


No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

Serial No.	Parameter	Description
1	Panel Material	Brass alloy/Stainless-Steel
2	Surface finish	Wire drawing/Polishing/Spray painting
3	Panel Dimension(mm)	81*102
4	Cutout(mm)	74.3x77
5	Capacity of modules	2 ways modules
6	Sink box Material	Steel+Zinc plated
7	Sink box Thickness	1.0mm
8	Inner box Size(mm)	10.5x6.5x10.5
9	Outer box Size(mm)	54x34x23
10	Available modules	45*45/22.5*45 (mm)
11	N.W(kg)	0.44 (Brass alloy);0.43(Alu alloy)
12	G.W(kg)	23 (Brass alloy);22.4(Alu alloy)
13	Carton size(cm)	54x34x23

Application:



- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

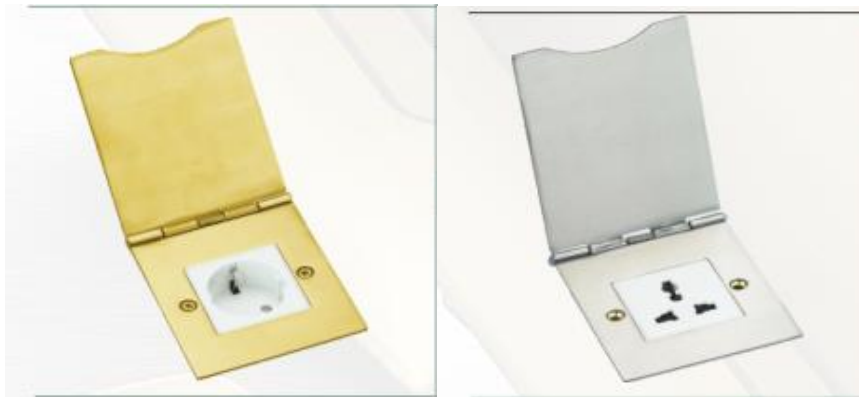



Installation instructions:

1. Remove the panel from the bottom box along with the electrical modules.
2. Fix the flooring with spare screws on the bottom box and place it in the embedded hole.
3. The flooring surface shall be at least level with the ground or 20mm below the ground.
4. Remove flooring surface ,Insert the 10--12mm lead head into the terminal of floor box.
5. Fix the panel to the bottom box with screws.

Attentions:

1. Dispose of trash in bottom box and prevent dirt and debris from entering inside.
- 2.The sealing ring is closely attached to the smooth surface to prevent water leakage.
- 3.Prevent from alkaline corrosion and humidity.
- 4.When installing, pay attention to the opening direction,the length of the conductor to the bottom box shall not exceed 10cm,Set aside at least 200mm of cable.

5. When installing and wiring, Product should avoid direct contact with corrosive liquid, gas (strong acid, strong alkali, paint).

6. This product is suitable for dry surface treatment, avoid water flush and immersion, and ensure its insulation

7. Avoid acid alkaline solution flushing, avoid scratch of transparent protective paint, ensure corrosion resistance.



Package: 50 Pcs inner box into a master carton. Poly bag with box packing.

Method of use:

Gently press the outlet with your hand and lift the lid ,the lid will open along with it to reveal

the function keys inside.(Another way is to open the lid directly to expose the functional module).

Product Show:





Features:


1. **Nice appearance and safety design for floor management** : Stepped edge brass is available in plain polished (W) or antique bronze (ABZ) or simple polished rope edge(K) or standard soft edge in brushed (BR) or polished (PS) stainless steel. All with a choice of white or black interiors.
2. **Safety design:** Flush mount box of 1 Gang white insert under shaver Sockets.Surface seamless design and dust and impurities be protect into inside.
3. **Easy to Install:** Simple design as shaver sockets with spring loaded lid and supplied flush mount box with M3.5 X 30mm fixing screws.
4. **More Strong Scratch Resistance:** Surface finish made from stainless steel or Brass by combination of tough material, Aluminum (ADC12) and shot blast finish on the surface achieves high scratch resistance.
- 5.**Ultra slim panel only with thickness of 4mm;**
- 6.**Good socket receptacle materials increase service life:**Using elastic phosphor copper avoids playing spark plug and plug set to bit dead. Ensure high conductivity and more life of pulling and plugging over 15000 times.PC+ABS(1.Modules fireproof : 850 degree C temp.; 2.Modules don't distortion under 102 degree C temp.; 3.Stand under 15 degree C temp) ;Oxygen Insulation & Fire resistance in accordance with

UL94 international standard.

7. More heavy duty of bottom boxes:Thickness of bottom boxes is over 1mm.

HTD-101 Outline drawing:

HTD-101 outline

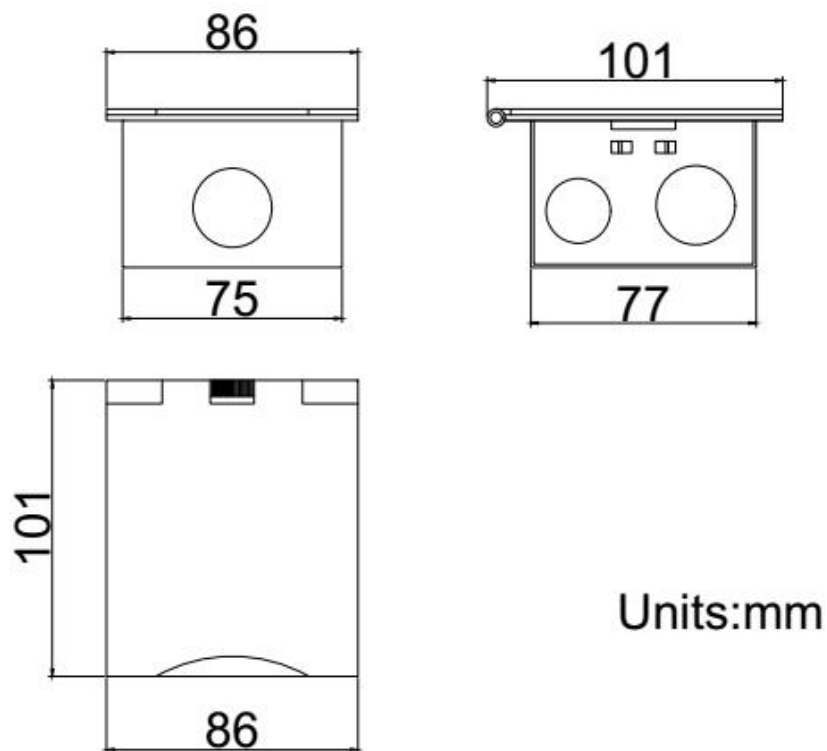






















Units:mm

Available sockets or modules types:

SAFEWIRE

45 Type Function Accessories

								
2 pin socket	3 pin 10A socket	3 pin multi function	BS socket	EU socket	French socket	USA socket		
F2	F3	F4	F11	F15	F16	F18		
								
RJ45/Cat.6 data/TEL socket	TV socket	BNC socket	q3.5 earphone socket	DIN(eight pins)	Audio socket	Vedio socket	Stereo socket	USB
F20/F21/F22/F23/F25/F28	F50	F51	F52	F53	F55	F56	F58	F59
								
Cannon socket	Speaker socket	15 pins VGA (pin hole type) / 15pins VGA (pin / hole type)	HD TV socket	S-terminal				
F60	F62	F65/F66/F67/F68	F68	F71				