



Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou,China ,325604

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Automatically pop up powerbar

PRODUCT No. : FZ-527E



Address:2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou,China ,325604

Tel:0086-577-61725369

Mob:0086-18612380398

ZIP:325604

(E-mail): info@safewirele.com

(WEB): <http://www.safewirele.com>

Tel:0086-577-61725369;

Email:info@safewirele.com;

<http://www.safewirele.com>



Environmental requirements

Serial No.	Parameter	Description
1	Operating temperature	-10℃~+40℃;Operating
2	humidity	20%~90% RH
3	Storage temperature	-20℃~+85℃;storage
4	humidity	10%~95% RH
5	Resistance to pressure	≥3Kv/AC 1min
6	Isolation resistance	500v DC/100MΩ

Technical parameters :

Serial No.	Parameter	Description
1	Material	Aluminum 6063, PC zinc alloy
2	Optional color	silver/black
3	Panel Dimension(mm)	Ø120
4	Cutout(mm)	Ø100
5	Height when closed(mm)	435
6	Height when pop up(mm)	667
7	Capacity of modules /Interface size	8 ways 45*45mm Legrand's Mosaic modules
8	Configuration	Power outlet+Data outlet or USB charging : Customized as required
9	Cable length	1.5m or required length
10	Time of engine motor	MAX 1000h



SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou,China ,325604

Application :



- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

Product Show:



Tel:0086-577-61725369;

Email:info@safewirele.com;

<http://www.safewirele.com>

Features:



1. Automatically on/off,Optional wireless charger of Qi
2. 2.1A/4.2A fast USB charger and blue tooth speaker outlet etc
3. International 45mm Legrand' S modules/outlets
4. Aluminum alloy 6063 reliable light housing
5. optional 1.5 M International IEC plug and cora of 1.0 mm² square or 1.5mm² square.
6. LED control panel design.




SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou,China ,325604

FZ-527E Outline drawing:

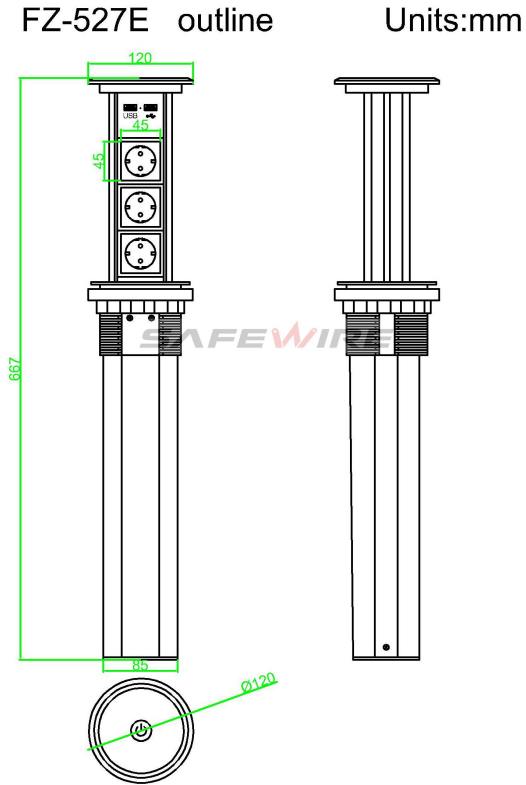

Package:4 Pcs inner box into a master carton.Poly bag with box packing

SafeWire

FZ-527E Package solution



Tel:0086-577-61725369;

Email:info@safewirele.com;


<http://www.safewirele.com>




SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.


2nd floor Wealth Garden, Liushi town, Yueqing. Wenzhou.China .325604

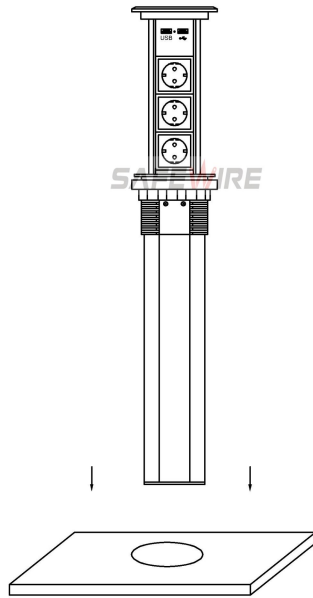

(1)

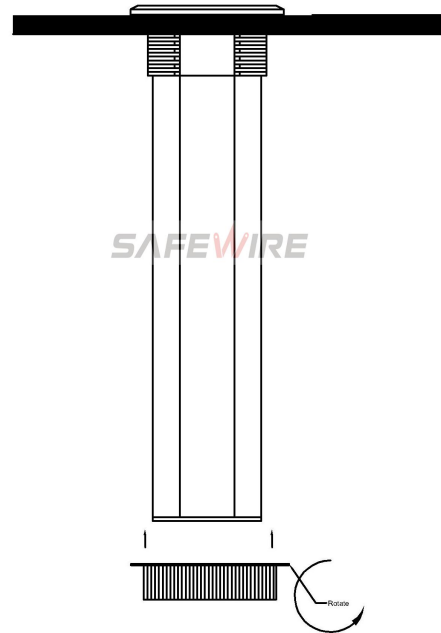

(2)

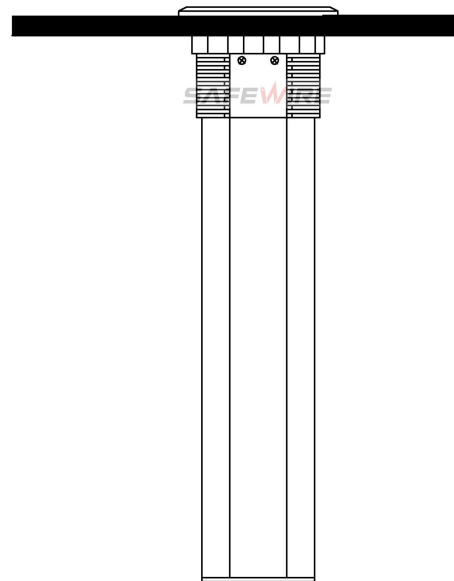

(3)






















Installation Process

1. Open a circular hole with a diameter of 100mm.
2. After removing the buckle, insert the product into the hole in the tabletop.adjust the direction and fix the product on the buckle at the bottom of the tabletop.
3. Connection cable and tighten the screw ring to use

Available for F type 45*45mm type or D type22.5*45mm international sockets or modules types:

SAFEWIRE

45 Type Function Accessories

								
F2	F3	F4	F11	F15	F16	F18		
								
F20F21F22F23F25F28	F50	F51	F52	F53	F55	F56	F58	F59
								
F60	F62	F65F66F67F68	F68	F71				

Attentions:

- 1.Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.
2. All dimension quoted are nominal only. Drawings , images and text are for illustrative purposes only and product details and dimension are subject to change without notice.

Safety Warning:

1. For the protection and safety of you and others,please read this manual before installation.If you have something you don't understand when you install it,please contact us in any time.
2. Please noted that the sum of current (power) should not exceed the rated current (power) of the product.3*1.0 square power cable with a maximum power of 2000W,3*1.5 square power line maximum power 3000W
3. Please install this product in a location that is out of reach of children to ensure personal safety.
4. To avoid electric shock, fire, and electrical failure ,please don't install this product in a humid environment.
5. To avoid electric shock and fire,please don't damage the power cord and power outlet.
6. To avoid electric shock and the expiration of the warranty period,please don't disassemble this product.
7. To avoid electric shock and fire caused by electrical leakage,connect a cable with a grounding.