



Wenzhou Safewire Electric Co.,Ltd.  
No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604  
Tel:0086-577-62799688; Email:info@safewirele.com;  
[www.safewirele.com](http://www.safewirele.com)

Wenzhou Safewire Electric CO.,Ltd.

## SPECIFICATION SHEET

**PRODUCT NAME:** Desktop socket

**PRODUCT No. :** FZ-517



ADD: 152 xinguang industrial zone, yueqing city, zhejiang province

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



**Wenzhou Safewire Electric Co.,Ltd.**

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604  
Tel:0086-577-62799688; Email:info@safewirele.com;

[www.safewirele.com](http://www.safewirele.com)

**Technical parameters & characteristic :**

**1) Working environment:**

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A


**2) Characteristic:**

<b>1</b>	<b>Model</b>	<b>FZ-517</b>	<b>6</b>	<b>HS Code</b>	8536690000
<b>2</b>	<b>Brand Name</b>	Safewire or OEM brand	<b>7</b>	<b>Market standard</b>	<b>Customized</b>
<b>3</b>	<b>Type</b>	Desktop socket	<b>8</b>	<b>Place of origin</b>	Zhejiang , Wenzhou, China
<b>4</b>	<b>Color</b>	Silver/black/white	<b>9</b>	<b>Frequency</b>	50Hz~60Hz
<b>5</b>	<b>Grounding</b>	Standard grounding	<b>10</b>	<b>Current Type</b>	AC

**3) Technical parameters :**


Serial No.	Parameter	Description
<b>1</b>	<b>Panel Material</b>	Aluminum alloy
<b>2</b>	<b>Surface finish</b>	Silver/black/white
<b>3</b>	<b>Panel Dimension(mm)</b>	240x120
<b>4</b>	<b>Cutout(mm)</b>	231x112
<b>5</b>	<b>Height of product(mm)</b>	70
<b>6</b>	<b>Bottom box size(mm)</b>	229*110*70
<b>7</b>	<b>Bottom box material</b>	Plastic
<b>8</b>	<b>Capacity of modules /Interface size</b>	6 ways 45*45mm modules
<b>9</b>	<b>Configuration</b>	Power outlet+Data outlet or USB charging : Customized as required
<b>10</b>	<b>Cable length</b>	1.5m, 2m,2m or required length

## Application:

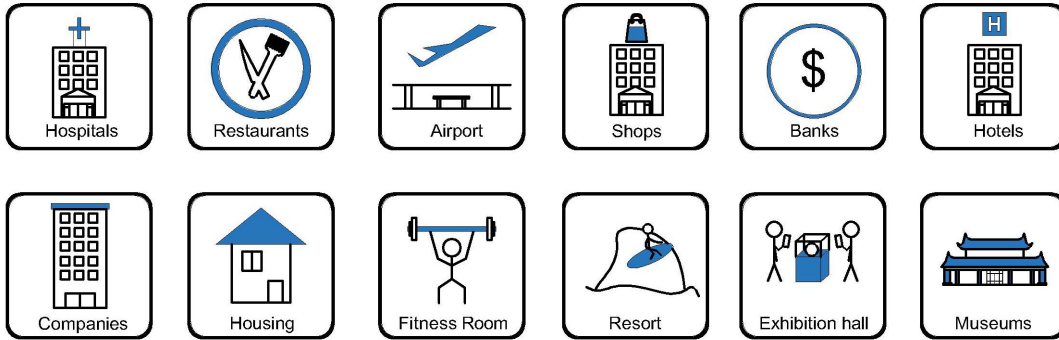


- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

### CE certificate by TUV,Germany

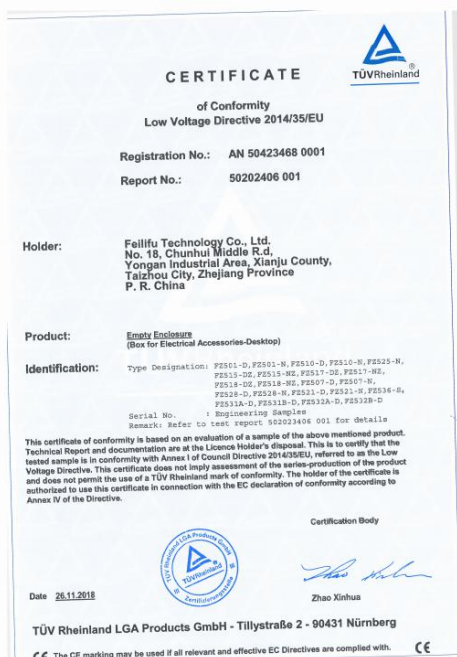

### LVD test report

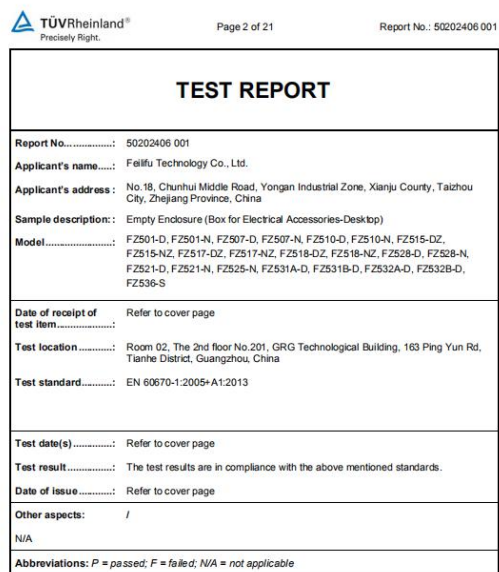

**Product Show:**
























**Features:**

- 1.The panel is by aluminum alloy of integrate die casting structure,more reliable surface finish protect from scratch.
- 2.Easy Installation: Only need screw the bottom box through hole of panel. Fast wiring HTJ-002 terminal block tight by 3 screw,0.5~6mm<sup>2</sup>soft/hard wire.
- 3.Replace modules no need to change complete desktop socket,save labor lost.
- 4.Fire retardant PC plastic bottom box.


available for 45\*45mm type international sockets or modules types:

**SAFEWIRE**

45 Type Function Accessories

								
2 pin socket	3 pin 10A socket	3 pin multi function	BS socket	EU socket	French socket	USA socket		
F2	F3	F4	F11	F15	F16	F18		
								
RJ45/Cat.6 data/TEL socket	TV socket	BNC socket	3.5 earphone socket	DIN(eight pins)	Audio socket	Video socket	Stereo socket	USB
F20/F21/F22/F23/F25/F28	F50	F51	F52	F53	F55	F56	F58	F59
								
Cannon socket	Speaker socket	15 pins VGA (pin /hole type) / 9pins VGA(pin / hole type)	HD TV socket	S-terminal				
F60	F62	F65/F66/F67/F68	F68	F71				

**FZ-517 Outline drawing:**

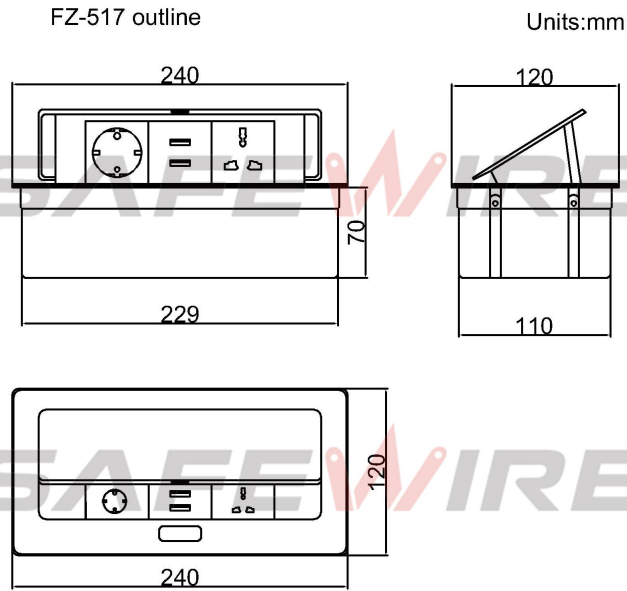

**Package:**20 Pcs inner box into a master carton.Poly bag with box packing.


**SafeWire**

Package solution



### Installation Process


1. Cut out as specification sheet.
2. put the bottom box into cut-out hole,punch the self-tapping screw and fix the bottom box.
3. Remove plastic frame fixing socket modules.Assembly the socket or data Jack into the plastic frame and press frame ensure them combine tightly.
4. Keep socket modules connected by inner wire (it should be copper core 1.5mm<sup>2</sup>9~20 wire and length should be suitable).Then earthing and ensure inner wire tightly with modules.For fast connector terminal block,Just insert wire into block.
5. Phone line ,TV receiving line sound box wire ( it should thin wire ) Just the wire length and tighten stop screw comathen.
6. Put the panel on the bottom box and it with the hole.

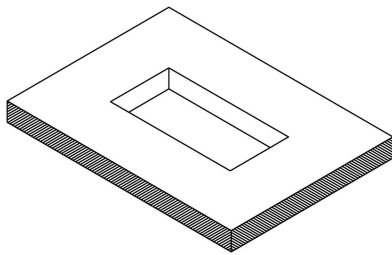


(1)




(2)

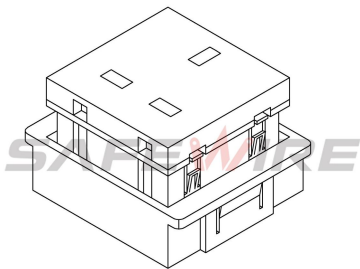


(3)

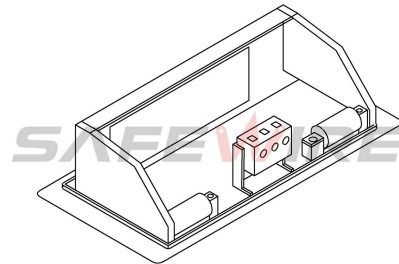


(4)

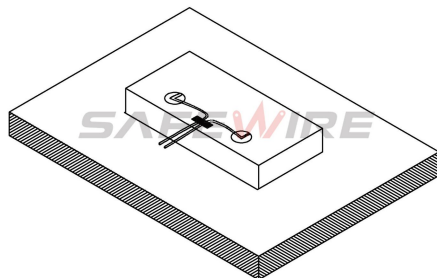

(5)

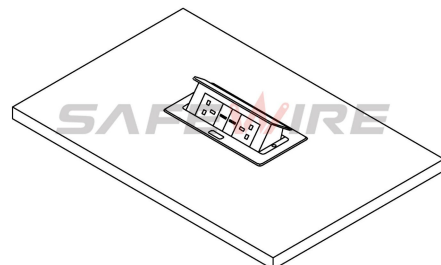

(6)

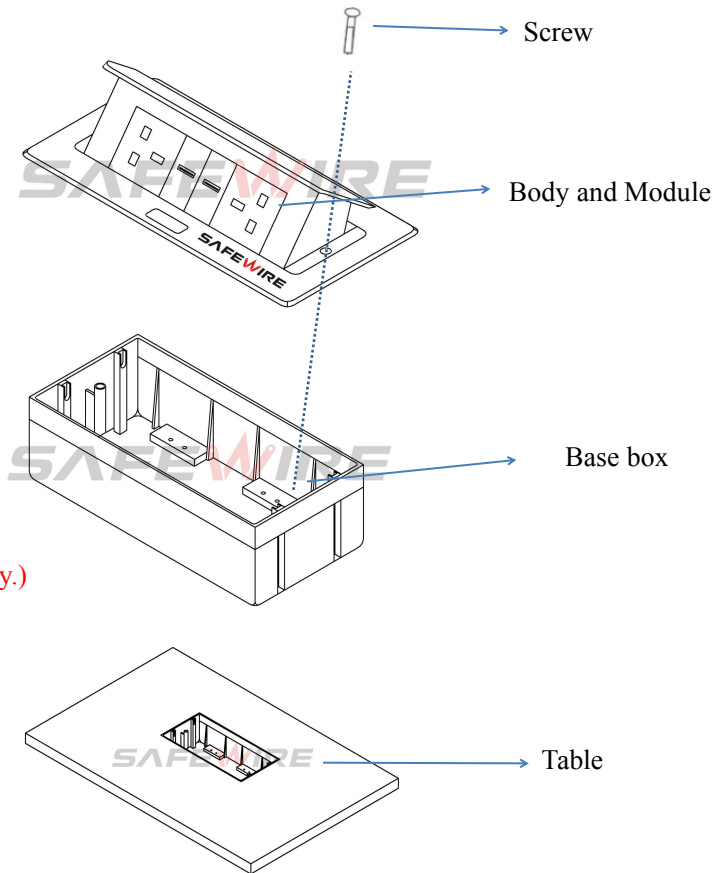

(Image is for reference only.)

**Attentions:**

- 1.Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.
2. All dimension quoted are nominal only. Drawings , images and text are for illustrative perposes only and product details and dimension are subject to change without notice.

**Safety Warning:**

- 1)This is a class I product and must be earthed
- 2)This product must be installed/wired by a qualified electrician
- 3)before installation/maintnance ,ensure the mains supply is switched off and the circuit fuses are removed or circuit breakers switch off
- 4)For indoor use only