

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME : Open coverplate

PRODUCT No. : 120K



HTD-120K

ADD: 152 xinguang industrial zone, yueqing city, zhejiang province

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



Technical parameters & characteristic :

1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A


2) Characteristic:

| | | | | | |
|----------|-------------------|-----------------------|-----------|------------------------|---------------------------|
| 1 | Model | HTD-120K | 6 | HS Code | 8536690000 |
| 2 | Brand Name | Safewire or OEM brand | 7 | Market standard | Customized |
| 3 | Type | floor socket | 8 | Place of origin | Zhejiang , Wenzhou, China |
| 4 | Color | Golden, silver, etc | 9 | Frequency | 50Hz~60Hz |
| 5 | Grounding | Standard grounding | 10 | Current Type | AC |

3) Technical parameters :


| Serial No. | Parameter | Description |
|------------|-------------------------------|---|
| 1 | Panel Material | Brass alloy/Stainless steel |
| 2 | Surface finish | Wire drawing/Polishing/Spray painting |
| 3 | Panel Dimension(mm) | 120*120 |
| 4 | Cutout(mm) | 110x110 |
| 5 | Capacity of modules | 3 ways modules |
| 6 | Side Mounting type | HTD-120CK for Mounting ST optical fiber or SC optical fiber |
| 7 | Horizontal mounting | Horizontal installation |
| 8 | Sink box Material | Steel+Zinc plated |
| 9 | Base box dimension(mm) | 110*110*65 |
| 10 | Available modules | 45*45/22.5*45(mm) |

Application:

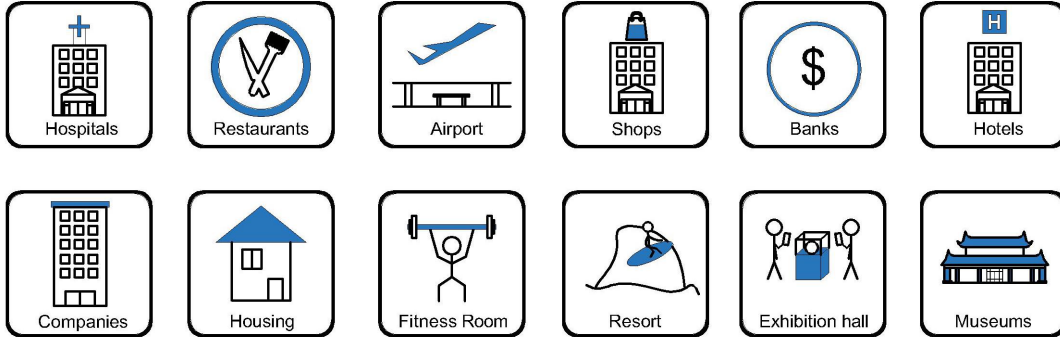


1. This model has bevelled edges to allow the cover to conceal the cut edge of the carpet or floor covering below.
2. The solid stainless/brass steel cover is useful for installation where the flooring material is not suitable for use in a rebated cover .Two cord outlet outlet ports fold into the box to allow cables to exit when in use.
3. Designed to feed workstations or equipment in open plan areas.Cables may be routed to a desk using an optional cable umbilical.
4. For concrete floor/alless floor

CE certificate by TUV,Germany

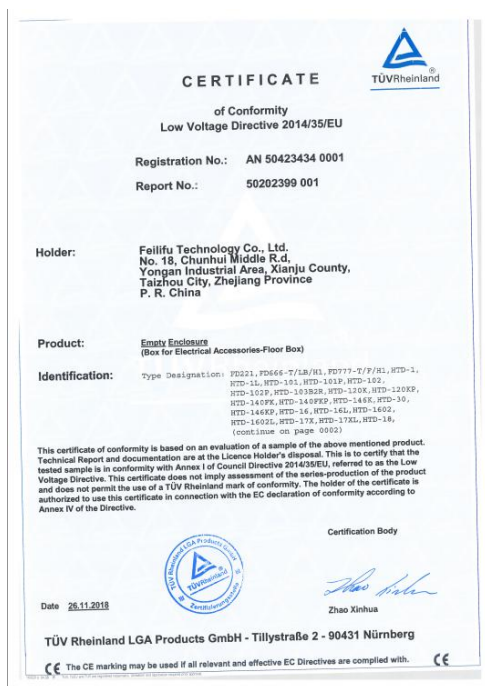

LVD test report

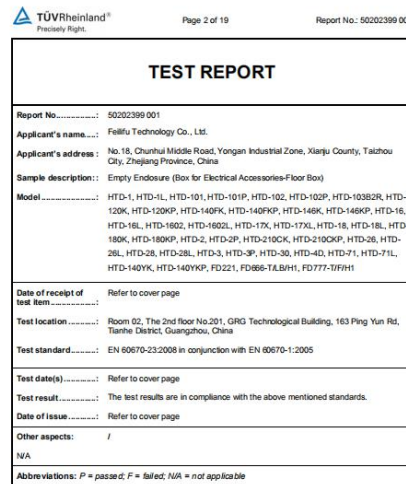



SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

Product Show:



Features:

1. Application: Recessed stage floor box provides versatile solution to accessing power, audio and visual equipment through floor .
- 2.Lid degree against floor:90/180 degree.
- 3.Hinged lid thickness over 4~4.5m , static pressure over 1000N .
- 4.Cold-rolled Steel box thickness over 1.5~2.0mm with powder coated.

Cable Exit Protective Port



DK cable outlet fixing



HK cable outlet fixing

DK DK Cable Exit Code:DK



HTD-XXX-NK/NKP

Top cover keeps parallel with floor (180°) when opening.

HK HK Cable Exit Code:HK




Available for F type 45*45mm type or D type22.5*45mm international sockets or modules types:

SAFEWIRE
45 Type Function Accessories

| | | | | | | | | |
|------------------|------------------|----------------------|--------------|-------------|--------------|--------------|---------------|-----|
| 2 pin socket | 3 pin 10A socket | 3 pin multi function | 6A socket | 6A socket | 6A socket | USB socket | | |
| F2 | F3 | F4 | F11 | F15 | F16 | F18 | | |
| 4 pin C&S socket | TV socket | 8W socket | 3.2A socket | 4 pin (pin) | Audio socket | Video socket | Stereo socket | USB |
| F19 | F20 | F21 | F22 | F23 | F24 | F25 | F26 | F27 |
| Current socket | Signal socket | 15 pins VGA | HD TV socket | Ethernet | | | | |
| F28 | F29 | F30 | F31 | F32 | | | | |

HTD-120K Outline drawing:

HTD-120K outline

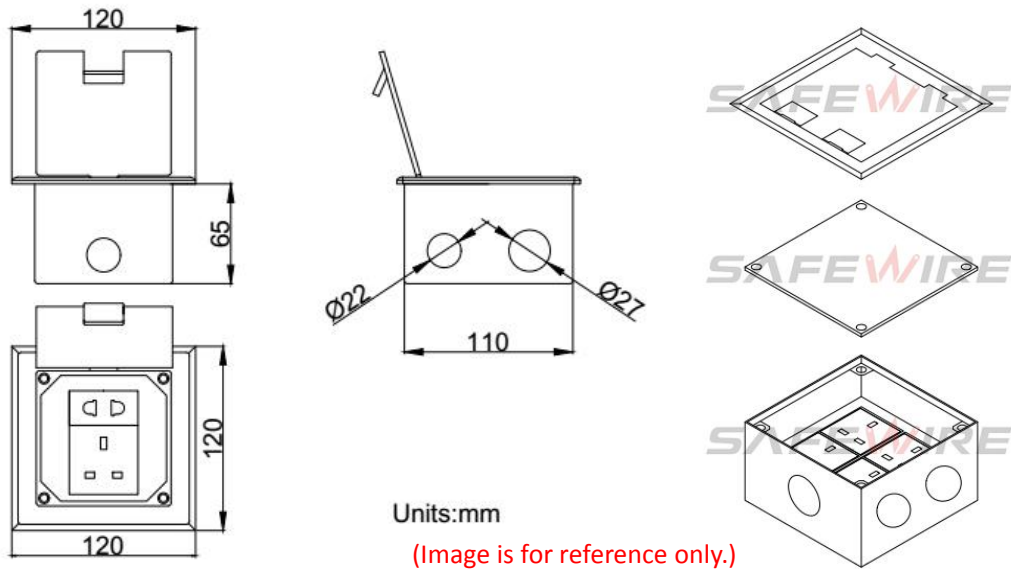

Package: 8 Pcs inner box into a master carton.Poly bag with box packing.

SafeWire


Package solution




www.safewirele.com

Installation instructions:


1. Cut out 113*113(mm), Powering the slurry.
2. Remove the pre-installed temporary lid,wiring and installing modules.
3. Per-installthe cable pipe as per your request .
4. Install cover lid and tighten with screws.
5. Conceal the cut edge of carpet of flooring

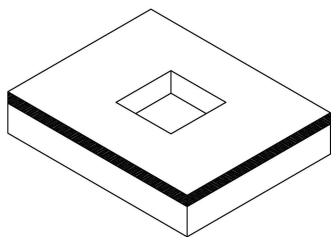

(1)

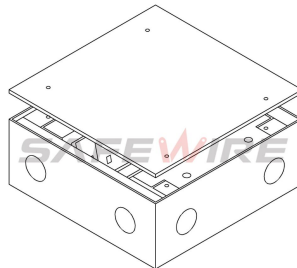

(2)

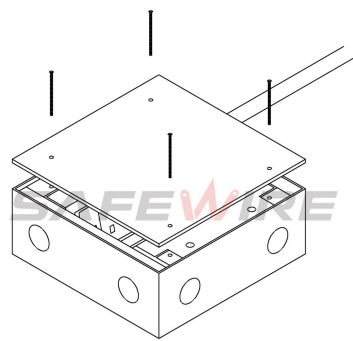


(3)




SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

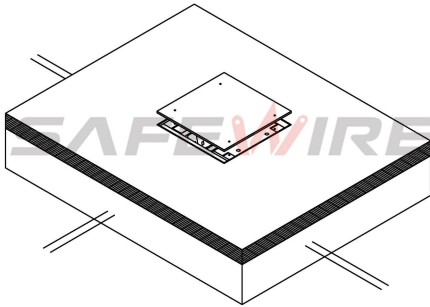

(4)

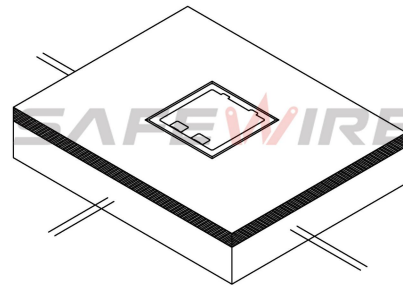

(5)

Attentions:

- 1.When installing and wiring,Product should avoid direct contact with corrosive liquid, gas (strong acid, strong alkali, paint).
- 2.This product is suitable for dry surface treatment, avoid water flush and immersion, and ensure its insulation.This product is not suitable for use in wet areas.
- 3.All dimensions quotes are nominal only.Drawing images and specification are only for illustrative purposes and dimensions are subject to final confirmation by us.

Safety Warning:

- 1.This is a class I product and must be earthed
- 2.This product must be installed/wired by a qualified electrician
- 3.For indoor use only.
- 4.For concrete access floor.