

Current Type: AC

Voltage:110~240V

IP:44

Frequency:50Hz~60Hz

Market standard: Customized

Quick Details

Model: HTD-180K

Place of origin : Zhejiang ,Wenzhou,China

Rated Current :10-25A

Type: floor socket

HS Code: 8536690000

Grounding: Standard grounding

Color :golden or sliver

Brand Name : Safewire or OEM brand

Application:

Large capacity for the modules. Compact and stylish, provide ready access to power and communication outlets recessed in the floor. Stylish brass alloy or stainless steel covers bevel down to a fine under foot, suitable for use with polished floor boards, carpet,ceramic tiles and floor coverings. It is designed to feed workstation or equipment in open areas, cables may be routed to a desk using an optional cable umbilical(Please noted that it don't suitable for use in wet areas)

- Office and education
- Industry and Engineering
- Presentation and retail;



- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

Packaging & Delivery

Inner packing box

Outer exporting carton

Brass outlet cover,Open Type Floor Socket ,Cover Type Floor Socket,floor box,floor socket,power socket,floor socket outlet,floor socket box,Floor connector,floor mounted sockets,Floor receptacle,Audio Visual sockets,Waterproof outdoor floor box,Access Floor Boxes,Floor jack,Electrical outlet,data boxes,Residential floor boxes screw lid,Residential floor boxes hinged lid

1) Features:

 More bigger access angle of flap when opened it: Open the cover with the ground 90 degrees, furthermore, open and ground into a 180 degree flat is also available. When using, open the cover horizontally to the floor to avoid accident potential and product



damage caused by cover erection.

- More convenient and secure to install: Hinged cover with screw fix to steel box body.
- 3. Protection of cable exit as DK type cable exit : The outlet port(reverse) can lead multi-strand wire cable out of the floor socket and effectively protect the wire cable skin against damaging. This cord outlet flaps fold down when in use to all cords out with main cover closed.

(2) Advantages and Features:

1. More Strong Scratch Resistance: Surface finish made from stainless steel or Brass by combination of tough material, Aluminum (ADC12) and shot blast finish on the surface achieves high scratch resistance.

2. High quality socket receptacle:Using elastic phosphor copper avoids playing spark plug and plug set to bit dead ,ensure high conductivity and more life of pulling and plugging over 15000 times.PC+ABS(1.Modules fireproof : 850 degree C temp.; 2.Modules don't distortion under 102 degree C temp.; 3.Stand under 15 degree C temp) ;Oxygen Insulation & Fire resistance in accordance with UL94 international standard.



3. Solid steel cover with bevelled edges to allow the cover to conceal the cut edge of carpet or floor covering below. It is available to insert plug and fasten the upper cover with plug. Only with outgoing plug cable at the outlet. It is very convenient for passing by and cleaning.

4. With temporary lid-secure to body during pour to prevent ingress of slurry.

5. Power-coated steel box has 10*25mm conduit and diameter of 27mm diameter knock-outs available to accommodate CAT 6A cabling available on request.

(4) Characteristics:

Brass outlet cover,Open Type Floor Socket ,Cover Type Floor Socket,floor box,floor socket,power socket,floor socket outlet,floor socket box,Floor connector,floor mounted sockets,Floor receptacle,Audio Visual sockets,Waterproof outdoor floor box,Access Floor Boxes,Floor jack,Electrical outlet,data boxes,Residential floor boxes screw lid,Residential floor boxes hinged lid



Wenzhou Safewire Electric Co., Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou, China ,325604 Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com


| Brand | Safewire | |
|----------------------|---|--|
| Item No. | HTD-180K | |
| Color: | Golden, sliver etc. | |
| Material: | Brass alloy, stainless steel etc. | |
| Application: | Residential ,Industrial or public | |
| Туре: | Floor socket | |
| Frequency: | 50HZ-60HZ | |
| Grounding: | Standard Grounding | |
| Voltage: | 90-260V | |
| Rated Current: | 15 | |
| Available modules: | Type 45,43,120,118,128,American GFCI series | |
| Damping device (DP): | Available | |

5.Our service:



Wenzhou Safewire Electric Co., Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yuqing, Wenzhou,China ,325604 Tel:0086-577-62799688; Email:info@safewirele.com; www.safewirele.com

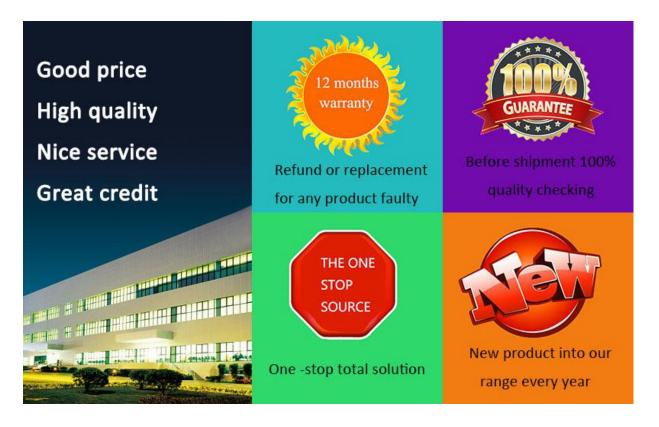

6. Product Show:





HTD-180AK



HTD-180ANK Cu-alloy



HTD-180ANKP SUS



HTD-180K



HTD-180K Cu-alloy



HTD-180NKP SUS

HTD-180K/180AK Outline drawing:



Wenzhou Safewire Electric Co., Ltd.


No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou, China ,325604

Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com



Available sockets or modules types:

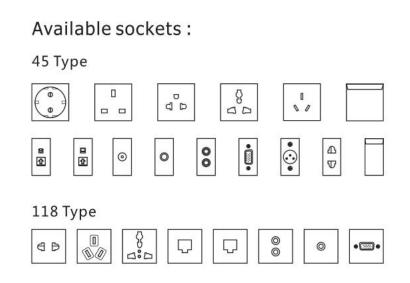

More International sockets is customization:

Schuko socket; France, UK, SA, Israel, Italy, Brazil, Aus/NZ, China,

Thailand, USA; etc.

| SCHUKO (Germany) | FRA/BEL UK SA | ISRAEL ITALY | BRAIL AUS/N | Z CHINA THAI/VN | USA USA | |
|---------------------|-----------------|--------------|-------------|-----------------|---------|--|
| Serial No. | Parameter | | Description | า | | |
| 1 | Product picture | | | | | |



www.safewirele.com

| | | HTD-180K HTD-180K HTD-180K HTD-180K HTD-180K HTD-180K HTD-180K HTD-180K | |
|---|------------------------|---|--|
| 2 | Panel Material | Brass alloy/Stainless steel | |
| 3 | Surface finish | Wire drawing/Polishing/Spray painting | |
| 4 | Panel Dimension(mm) | 180*180 | |
| 5 | Cutout(mm) | 170x170 | |
| 6 | Capacity of modules | 10 ways modules | |
| 7 | Mounting type | Horizontal installation | |
| 8 | Bracket material | Zinc Alloy & Alu Alloy | |
| 9 | Base box dimension(mm) | 260*135*65 | |




www.safewirele.com

| 10 | Height(mm) | 70~95(Adjustable) |
|----|-------------------|-------------------|
| 11 | Sink box Material | Steel+Zinc plated |

7. Process flow:

we apply ERP data management system , greatly increased the management in plan ,purchase, storage , manufacture and sales .

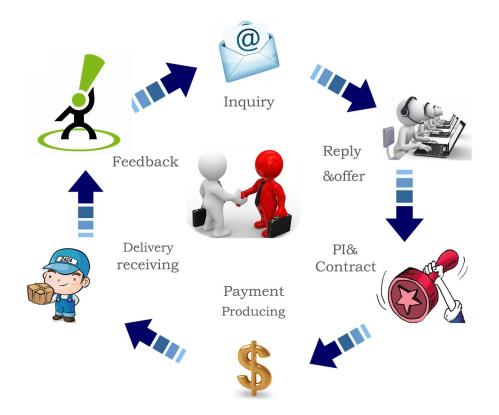

8.About us:

Wenzhou Safewire Electric Co.,Ltd is a company specialized in the



manufacture and sale of items in the field of electrical installation material and goods. We embarked on the relentless pursuit of being the biggest supplier with over 30,000 square meters building areas in China as we are engaged in producing and selling high-quality wiring systems produced in accordance with international standards. Our factory was recognized through ISO9001,ISO14001,OHSAS18001. And also be 3rd quality certification such as CE and SASO etc.



Happy He - General Manager: happyhe@safewirele.com;

Mr. Zhou -VP:info@safewirele.com;

Olivia Yang - Market:mkt1@safewirele.com;

Alice.Liu-Market:mkt2@safewirele.com;



Zuo Juan-Sales :sales1@safewirele.com;

FAQ:

Q:Do you have literature we can have?

A:Of course, we can post out a brochure or you can download it along

with data sheets direct from here

Q:Do you manufacture all products yourself?

A:We manufacture all of our core product ranges ourselves as a proud

best China manufacturer. A small number of our ancillary products are

brought in from trusted partners also mainly China based.!

Q:Do all of your products comply to National standards?

A:Our products meet China National standard ,IEC standard and the

relevant national standards such as SASO

Q:What lead times do you offer?

A: Lead time is dependent on many factors including type of unit and quantity required. We stock an extensive range of core product in a number of sizes that can be available 14 working days.Lead time indications are stated on quotations, but by all means feel free to ask for up to date information.



Q:Can I request a specific delivery time/day?

Safewire will always endeavour to meet our customer' s requirements

and hit special delivery times every day

Q:Can I request a technical specification?

Please contact us to request a technical specification or product

certification.Email address:info@safewirele.com;

Q:How long is the warranty on your products?

There is a 12 month warranty from date of delivery. In the event of

any failure, items must be returned to Safewire for full investigation.

Q:What is your products installation?

There are various methods of fixing for each unit - a member of the quotes team can talk you through the options or you can view them on the website.

Q:Can you send me a price list?

As there are so many variations of specification possible for each unit -We can send you brochure or you can download it from the website. Please contact the Quotes Team direct for pricing.

Q:How much will it cost?

This will vary on the unit and the specification of the unit, please either

call a member of the quotes team or complete the online form.



Q:Can I request a sales visit or a visit to your factory?

Please contact us to request a visit from us or to our Head Office

address: No.152 Xinggua Road, Xinggua industry zone, Liushi town,

Yueqing, Wenzhou, China, 325604;

Q:Can I request a sample from Safewire?

Safewire are happy to supply sample to our partners, please contact us

directly to discuss your request.

Q:Can I request sales and marketing material?

Safewire are continually investing in their sales and marketing material,

please contact us directly to discuss your requirements.

Q:How long make a sample?

A: Within 7 working days upon receipt of confirmed order and payment for standard product. Customization product order should be confirmed between us.