RoHS









45×45mm Module as Specification Legrand's Mosaic Series

- 1.Plastic Material Bayer 2805 PC(UL94V-0)
- 2.Shutter door: The shutter prevent accidental electric shock. The single pole can bear max 4KGF pressure;
- 3.Inserts inside: 0.6mm thickness elastic phosphor copper avoids playing spark plug and plug set to bit dead, ensure high conductivity, life of pulling and plugging over 15000 times.
- 4.Switch materials: Using silver-tinalloy or silver-nickel contacts, to strengthen conductivity of the switch;
- 5. More safety double pole: Socket with double pole auto switch type;
- 6.IEC60884 standard technical:Insulation strength as 100M Ω Min, test voltage as AC 2000V/Minute; contact Resistance: 50MΩ Max, Electronical life over 10000 min;
- 7. Easy-install modules design: One side two clip, four direction clip type;
- 8. Fast wiring: Screw type for fast wiring to save labor cost.

Product Picture	Item	Size (mm)	Description	Material	Product Picture	Item	Size (mm)	Description	Material
a.	F2	22.5x45	2 pin socket,10A, 250V	Polycar- bonate	1	F3	45x45	3 pin 10A,220V;	Polycar- bonate
*	F4	45x45	3 pin multi function socket of 90 degree angle, 10A, 250V	Polycar- bonate		F5	45x22.5	Swiss socket, 10A, 250V	Polycar- bonate
-	F8	22.5x45	USB charging, single port output 5VDC 2.1A, maximum charging current 1*2100mA, screw terminal, Support YD/T1591-2009, BC1.2, Apple and Samsung phone and IPAD.	Polycar- bonate	=	F9	45x45	USB charging, dual port output 5VDC 2.1A, maximum charging current 1*2100mA, screw terminal, Support YD/T1591-2009, BC1.2, Apple and Samsung phone and IPAD.	Polycar- bonate
	F11	45x45	BS socket, 13A, 250V;2P+E with shutters socket;	Polycar- bonate	0	F15	45x45	European socket(Schuko), 16A, 250V , Angle 0 degree or 90 degree, 2P+E, screw terminals;	Polycar- bonate
. 0	F15B	45x45	European socket(Schuko), 16A, 250V, Angle 45 degree , 2P+E , screw terminals;	Polycar- bonate	•	F16	45x45	French Socket, 16A,250V	Polycar- bonate
4.5	F18	45x45	American socket, 16A, 250V;2P+E with shutters socket;	Polycar- bonate		F21	22.5x45	Cat 5e RJ45 socket with shutter;	Polycar- bonate


SAFEWIRE By **Feilifu** | Since 1998;20 years OEM factory for global brand

Product Picture	Item	Size (mm)	Description	Material	Product Picture	Item	Size (mm)	Description	Material
	F21B	22.5x45	Cat 6 RJ45 socket with shutter;	Polycar- bonate	₹ 	F23	22.5x45	RJ11 Telephone socket with shutter, regular with 4 contact pins. 2 contact pins and 6 contact pins should be customization production.;	Polycar- bonate
9	F50	22.5x45	Single male TV socket;	Polycar- bonate	a 🚳	F51	22.5x45	BNC socket	Polycar- bonate
	F52	22.5x45	Φ3.5 earphone for aduio /video connector, screw terminals	Polycar- bonate		F53	22.5x45	DIN(eight pins)	Polycar- bonate
•	F55	22.5x45	Audio socket provide the stereo audio connect for device such as DVD drive, camera etc.;	Polycar- bonate	•	F56	22.5x45	Vedio socket provide the video connect for device such as DVD drive, camera etc.;	Polycar- bonate
	F58	22.5x45	Sound socket provide the stereo audio connect for device such as DVD drive, camera etc.;	Polycar- bonate	0	F59	22.5x45	USB for data 2.0,screw terminal	Polycar- bonate
•	F60	22.5x45	Male Kalon socket, soldering connection	Polycar- bonate	•	F62	22.5x45	Speaker socket, soldering connection;	Polycar- bonate
	F65	22.5x45	15 Pins VGA (male type), RS232 socket,soldering connection	Polycar- bonate		F66	22.5x45	15 Pins VGA (female type); RS232 socket, soldering connection	Polycar- bonate
	F67	22.5x45	9 Pins VGA (male type), RS232 socket, soldering connection	Polycar- bonate	į	F68	22.5x45	9 Pins VGA (female type); RS232 socket, soldering connection	Polycar- bonate
	F69	22.5x45	HDMI,single HDMI socket with protective plug, 1 module size	Polycar- bonate	÷	F71	22.5x45	S terminal; soldering connection	Polycar- bonate
	F81	45x22.5	2 way curve switch, 10A, 250V	Polycar- bonate		F83	45x45	2 way switch, 10A, 250V	Polycar- bonate
	F70	22.5x45	Empty plate; material: Polycarbonate; color:white	Polycar- bonate		F80	45x22.5	1 way switch, 10A, 250V	Polycar- bonate
	F82	45x45	1 way switch, 10A, 250V	Polycar- bonate					


4. 45×45mm Legrand's Mosaic Series Module

Product mix


1 way

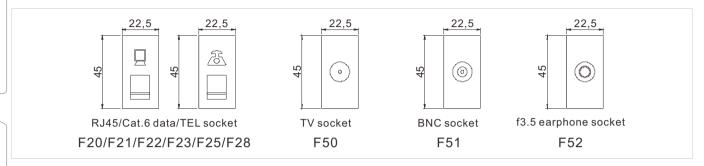


2 way

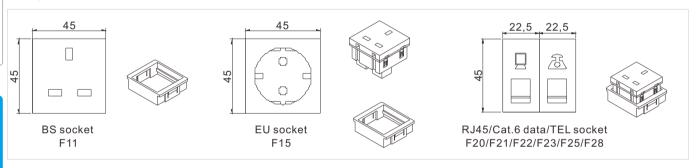

3 way

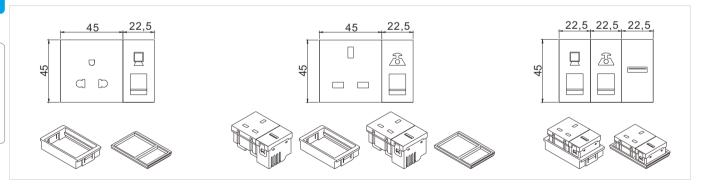

4 way

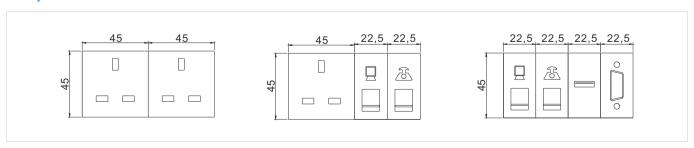















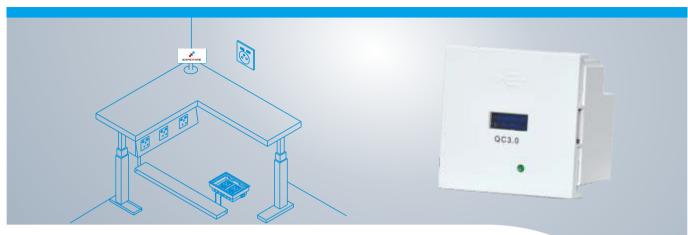

XJY-USB-17J USB Charger Series

Features:

- 1. Voltage withstanding: above 3KV.
- 2.Lightning protection level: 3K.
- 3. With identifying chip: can automatically recognize different mobiles and suit its request charging AMP to meet the charging speed.
- 4. Energy saving: Reach European power consuming Level 6.
- 5. With overload L current and over voltage protection.
- 6.Output ripple VPP <200mV. (connected phone response is fast while the phone while charging).
- 7. Automatically cut off after fully charged and not continue to charge the phone.
- 8. More life reliability: over 5 years.





Accessories















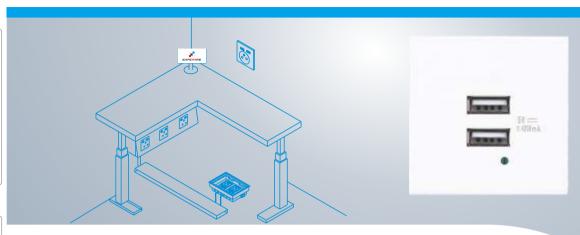

XJY-USB-17E USB Charger Series

Features:

- 1. Voltage withstanding: above 3KV.
- 2.Lightning protection level: 3K.
- 3. With identifying chip: can automatically recognize different mobiles and suit its request charging AMP to meet the charging speed.
- 4. Energy saving: Reach European power consuming Level 6.
- 5. With overload L current and over voltage protection.
- 6.output ripple VPP <200mV. (connected phone response is fast while the phone while charging).
- 7. Automatically cut off after fully charged and not continue to charge the phone.
- 8. More life reliability: over 5 years.



















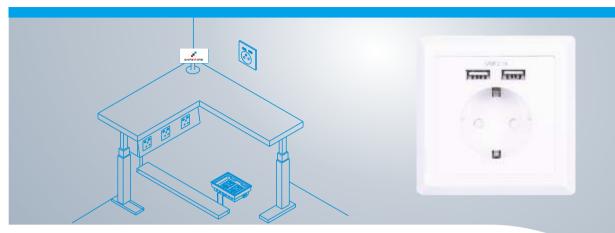


XJY-USB-18B USB Charger Series

Features:

- 1. Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and the can be use of various types of global USB charging equipment.
- 2. Current stabilizing protective electric appliance.
- 3. Compatible with multiple models of apple, Android and other devices.
- 4. Automatic distribution current, over charge protection, short circuit protection.
- 5.MAX 5V dual 2.1A USB output power, charges really fast.















































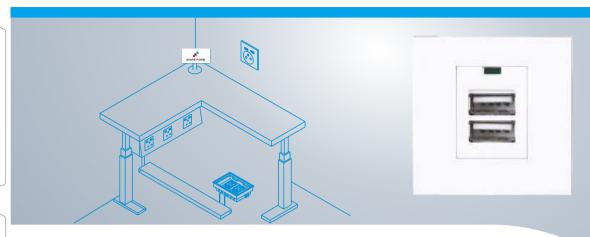

XJY-USB-26-A/A USB Charger Series


Features:

- 1. Voltage withstanding: above 3KV.
- 2.Lightning protection level: 3K.
- 3. With identifying chip: can automatically recognize different mobiles and suit its request charging AMP to meet the charging speed.
- 4. Energy saving: Reach European power consuming Level 6;
- 5. With overload L current and over voltage protection.
- 6.output ripple VPP <200mV. (connected phone response is fast while the phone while charging).
- 7. Automatically cut off after fully charged and not continue to charge the phone.
- 8. More life reliability: over 5 years.






Bridge accessories for floor box

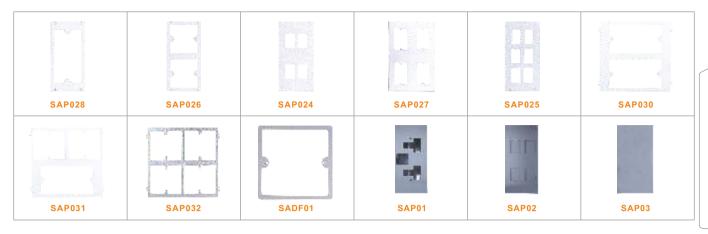

Sink Box

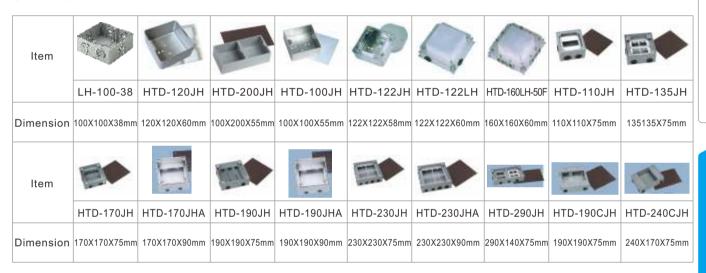

Optical fiber patch cord/cable (FC-FC,FC-SC,SC-SC,ST-ST.....)& Accessories.



Faceplate of internet data

