

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Pop up floor socket/Service power

PRODUCT No. : HTD-2



ADD: 152 xinguang industrial zone, yueqing city, zhejiang province,China

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



Technical parameters & characteristic :

1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A


2) Characteristic:

1	Model	HTD-2	6	HS Code	8536690000
2	Brand Name	Safewire or OEM brand	7	Market standard	Customized
3	Type	floor socket	8	Place of origin	Zhejiang , Wenzhou, China
4	Color	Golden, silver	9	Frequency	50Hz~60Hz
5	Grounding	Standard grounding	10	Current Type	AC

3) Technical parameters :

Serial No.	Parameter	Description
1	Panel Material	Brass alloy/Alu alloy
2	Surface finish	Wire drawing/Polishing/Spray painting
3	Panel Dimension(mm)	120*120
4	Cutout(mm)	103*103
5	Capacity of modules	3 ways modules
6	Bracket material	Zinc Alloy & Alu Alloy
7	Sink box Thickness	1.2mm
8	Sink box Material	Steel+Zinc plated
9	Available modules	45*45mm or 45*22.5mm
10	Damping device (DP)	Normal Pop-up & Soft Pop-up available
11	N.W(kg)	21.4
12	G.W(kg)	22.4
13	Carton size(cm)	52.5*33.5*33.5


Application :

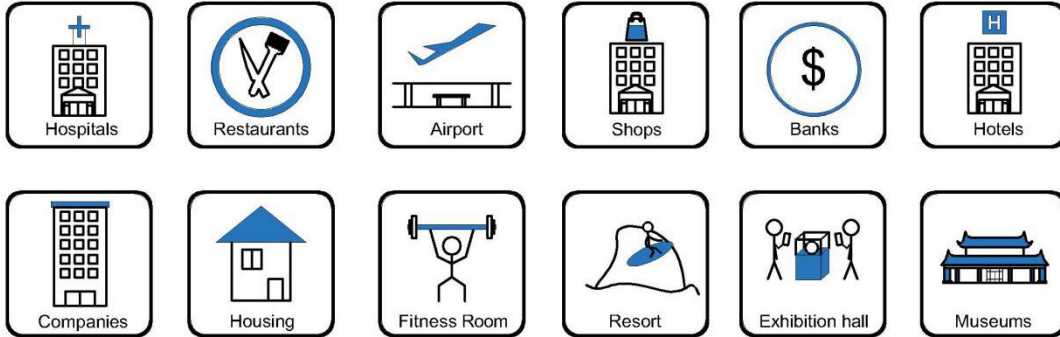


- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;



CE certificate by TUV,Germany

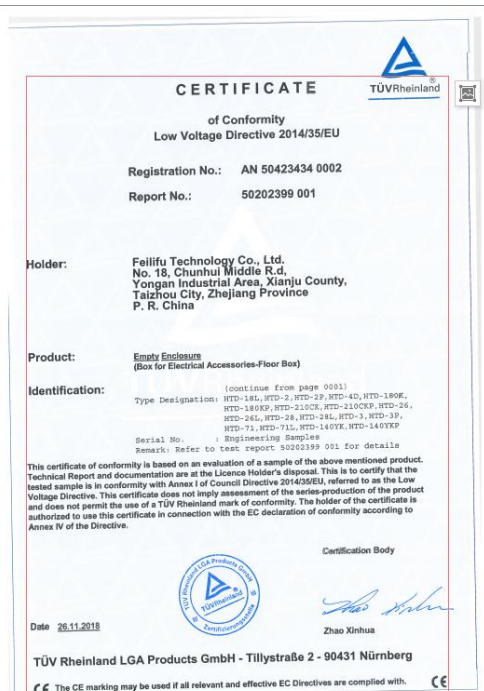

LVD test report

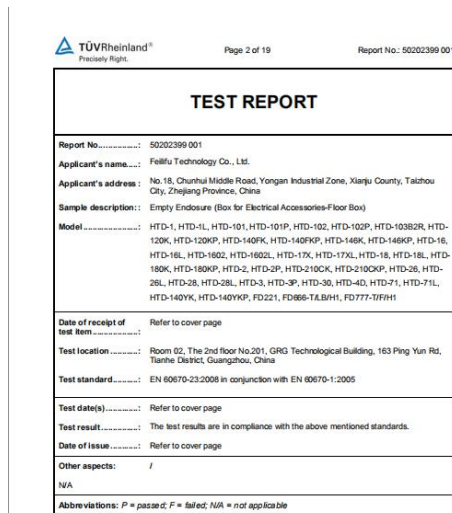


Product Show:



Features:

1.Easy to install: Fast connect wire for terminal block as fast wiring connection.

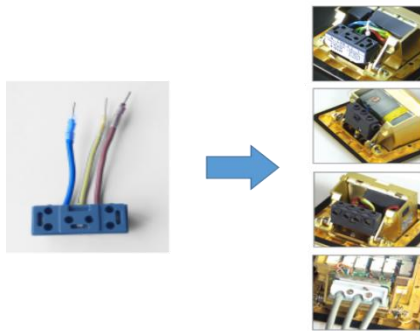


2. More Strong Scratch Resistance: Surface finish made from Brass (H62) by combination of tough material, Aluminum (6061) .

3.durable socket receptacle:Using elastic phosphor copper , high conductivity ,pulling and plugging over 15000 times.PC+ABS fireproof : 850 degree C temp.; Oxygen Insulation & Fire

resistance in accordance with UL94 standard.

4. Long lifetime of push button: ,more than 5000 times of push button.

5.More soft and slow damping device:The damping speed of our device is 10 times slower than simliar products.Our damping have been patented



10 Times

The floor socket equipped with soft starting device, the opening speed of which is 20 times slower than regular products. State for opening: uniform speed, slow.

7. More heavy duty of bottom boxes:Thickness of bottom boxes body is over 1mm. Available for 45*45mm type international sockets or modules types:


SAFEWIRE

45 Type Function Accessories

F2	F3	F4	F11	F15	F16	F18		
F20 F21 F22 F23 F24 F25	F30	F31	F32	F33	F35	F36	F38	F39
F40	F42	F45 F46 F47 F48	F48	F49				

Installation Guide

1. Cut out size : 103*103mm.Install the bottom box with panel into the specified location.
2. Screw mounting frame and panel(for desktop only).
3. Fix the panel and bottom box with screws(This item is for ground installation only).
4. Adjust the tightness of all wiring lines (no influence on opening).

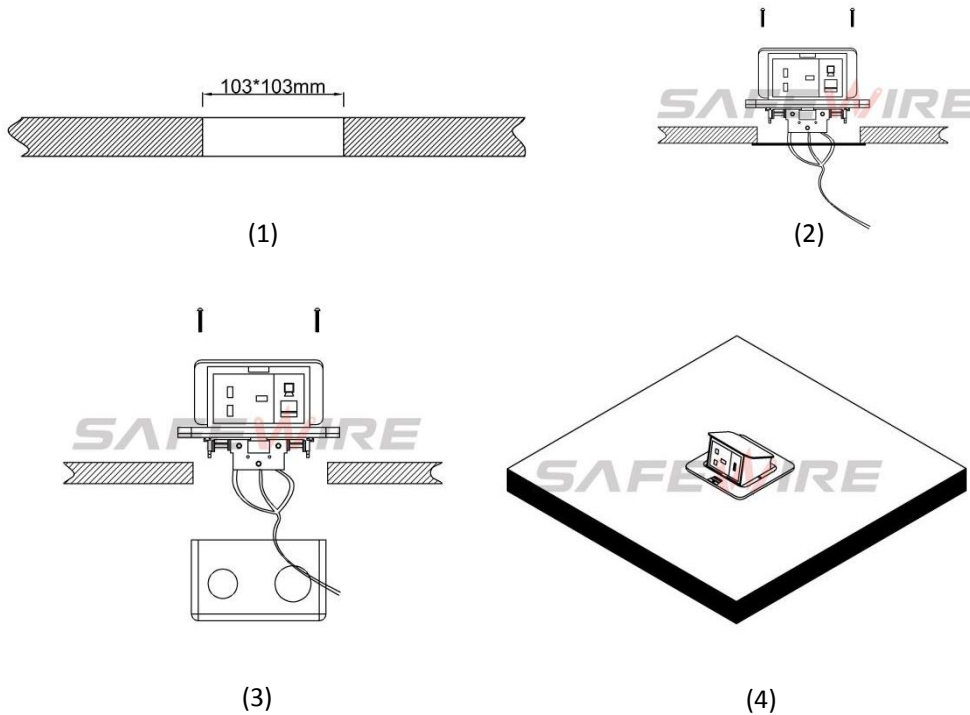

Attentions:

- 1.Dispose of trash in bottom box and prevent dirt and debris from entering inside.
- 2.Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.
- 3.When installing, pay attention to the opening direction,the length of the conductor to the bottom box shall not exceed 10cm,Set aside at least 200mm of cable.
4. All dimension quoted are nominal only. Drawings , images and text are for illustrative perposes only and product details and dimension are subject to change without notice.
- 5.Make sure that the sealing under plate will be jointed tightly with the earth's surface,avoiding seepage

Safety Warning:

- 1.This is a class I product and must be earthed
- 2.This product must be installed/wired by a qualified electrician
- 3.For indoor use only.
- 4.For concrete floor.