



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604  
Tel:0086-577-62799688; Email:info@safewirele.com;

[www.safewirele.com](http://www.safewirele.com)

---

Wenzhou Safewire Electric CO.,Ltd.

# SPECIFICATION SHEET

**PRODUCT NAME** : Safety shutter multi-sockets

**PRODUCT No.** : F16B



ADD: 152 xinguang industrial zone, yueqing city, zhejiang province

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604  
Tel:0086-577-62799688; Email:info@safewirele.com;

[www.safewirele.com](http://www.safewirele.com)


## **USB Characteristic:**

Serial No.	Parameter	Description
1	Panel Material	PC 94-V0
2	Inside material	Tin phosphorous bronze
3	Surface finish	Glossy
4	Input voltage	100~240v/AC 50~60Hz
5	Color	White /Black/Red
6	Number of terminals	2 screw terminals
7	Outlet	French socket
8	IK degree of protection	IK04
9	IP degree of protection	IP21
10	Dimension of product	45*45mm
11	With safety shutter	XJY-QB-45A
12	Without safety shutter	XJY-QB-45

## **Environmental requirements**

Serial No.	Parameter	Description
1	Operating temperature	-10℃~+40℃;Operating
2	humidity	20%~90% RH
3	Storage temperature	-20℃~+85℃;storage
4	humidity	10%~95% RH
5	Resistance to pressure	≥3Kv/AC 1min
6	Isolation resistance	500v DC/100MΩ

## Application:

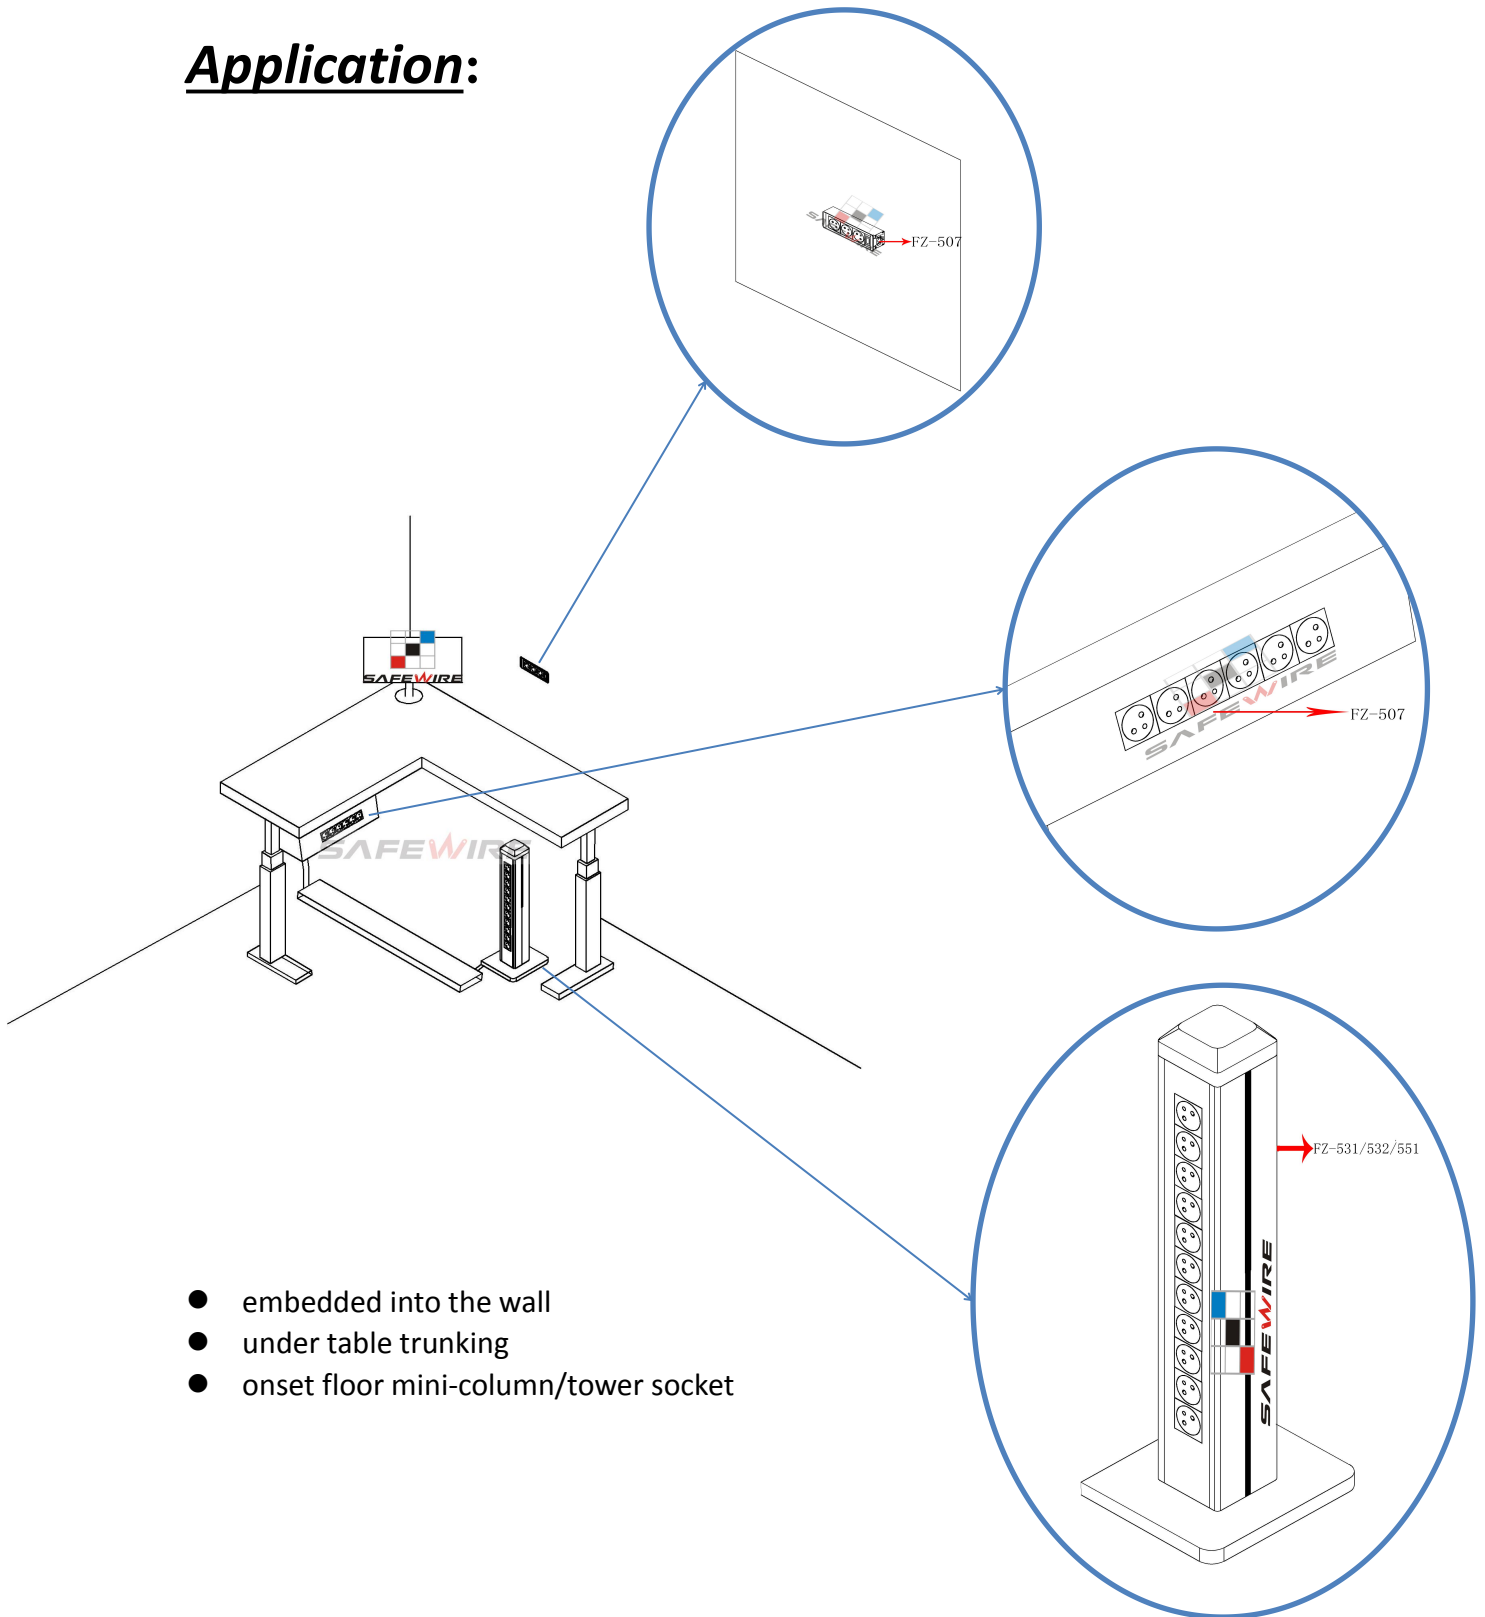

- embedded into the wall
- under table trunking
- onset floor mini-column/tower socket

## Feature :

Single



Double



Triple



Single




Double



Triple



1.5...2.5mm<sup>2</sup> for stranded cable (s)  
1.5...2.5mm<sup>2</sup> for flexible cable (s)  
1.5...2.5mm<sup>2</sup> for rigid cable (s)

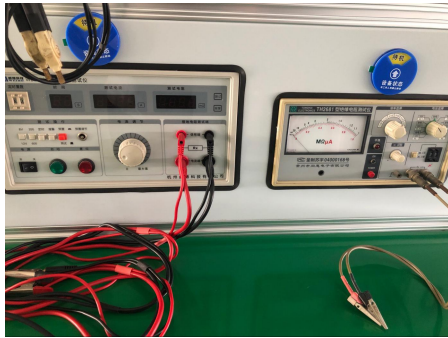

insulation resistance tester



dielectric strength tester



Current tester

1. toolless installation
2. Single , double , triple , multi-socket using the connection block
3. With optional safety key
4. With red ,green ,white finish for UPS ,health sector or specific power supply.



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604  
Tel:0086-577-62799688; Email:info@safewirele.com;

[www.safewirele.com](http://www.safewirele.com)

**Package:**10 Pcs connector 20pcsmetal hooks in poly bag with label. modules and parts is separate


**SafeWire**

Package solution



**SafeWire**

Package solution

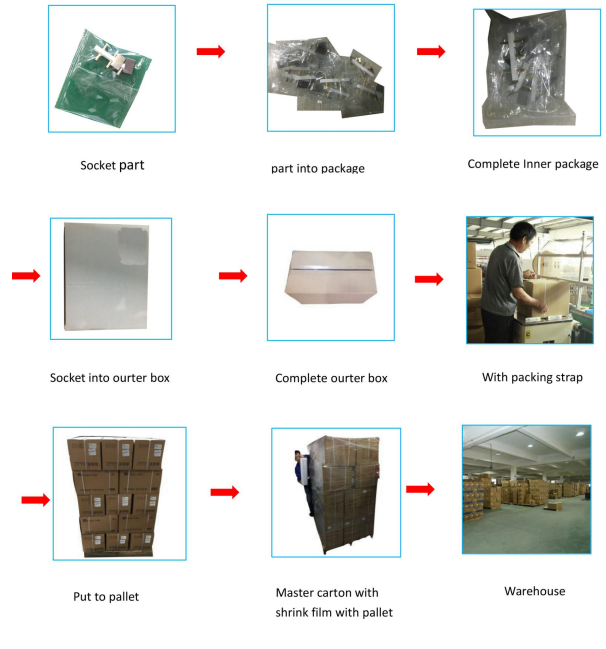




[www.safewirele.com](http://www.safewirele.com)

[www.safewirele.com](http://www.safewirele.com)

**F16B(XJY-QB-45) Outline drawing:**

XJY-QB-45 outline


Units:mm

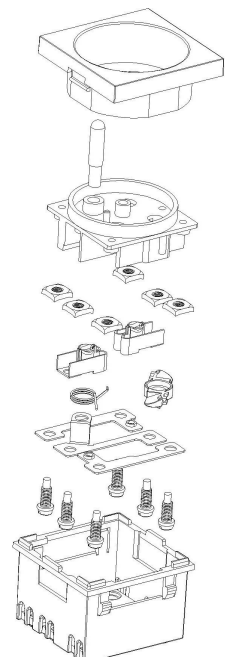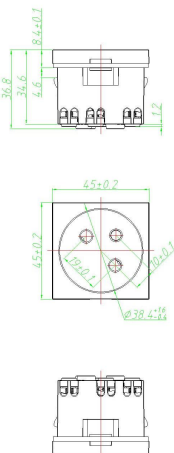


**F16B(P/N:XJY-QB-45A) Outline drawing:**

XJY-QB-45A outline

Units:mm

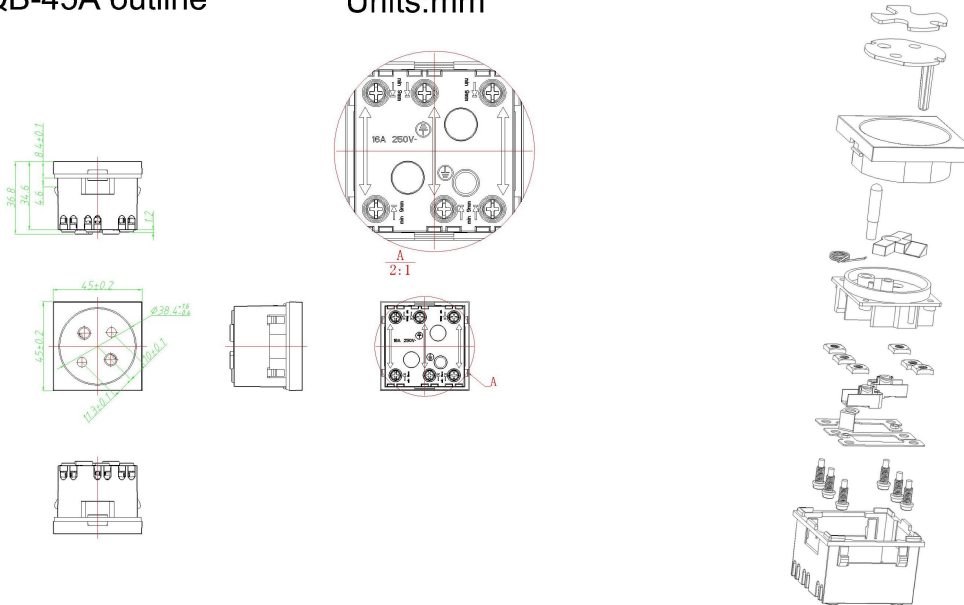

**Installation Process**

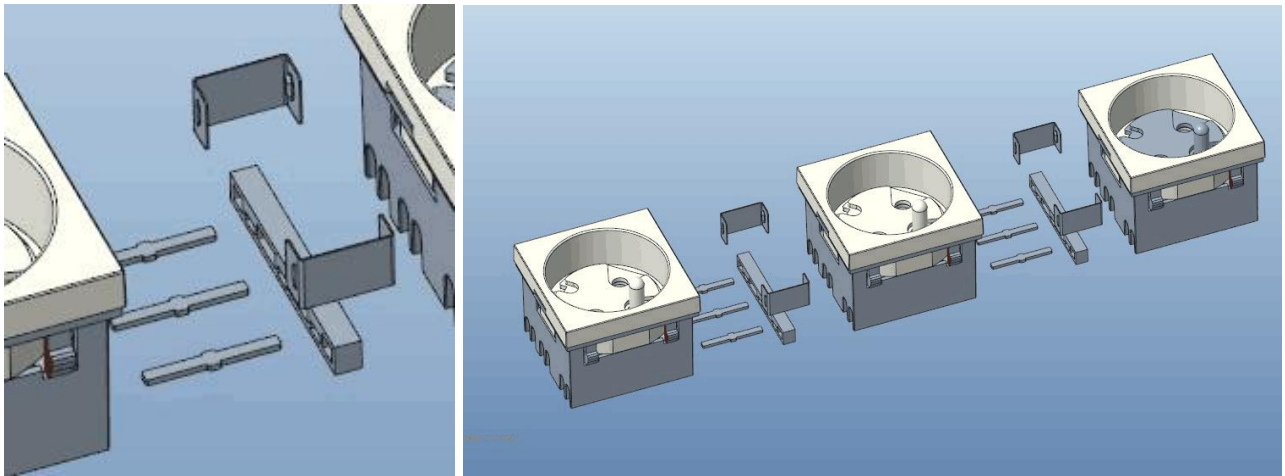

1. Insert the connection block in the contacts of the socket
2. Assembly of multi-sockets using the connection block press until the connection blocks is completely inserted in the contacts
3. Repeat the process with the next socket and then with the others

**4.Safety Warning:**

1. For indoor use only.
- 2.This product must be installed/wired by a qualified electrician.



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604  
Tel:0086-577-62799688; Email:info@safewirele.com;

[www.safewirele.com](http://www.safewirele.com)

---

**5.Attentions:**

- 1.Protect children from touch skirt of USB port.
- 2.Ensure current and voltage as rating current/voltage .Do not overload
3. Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.