



Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China

Tel:0086-577-61725369; Email:info@safewirele.com;


www.safewirele.com

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: European sockets

PRODUCT No. : F15C



ADD: 2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China

(TEL) :0086-577-61725369

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi Town, Yueqing city, Wenzhou, Zhejiang, China

Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com


Characteristic:

Serial No.	Parameter	Description
1	Panel Material	PC 94-V0
2	Inside material	Tin phosphorous bronze
3	Surface finish	Glossy
4	Input voltage	250v/AC 50~60Hz
5	Rated current	16A
6	3 pin Withdrawal force	54N
7	2 pin Withdrawal force	2N-18N
8	Durability	≥5000
9	Color	customization
10	Number of terminals	2 screw terminals
11	Outlet	European sockets
12	IK degree of protection	IK04
13	IP degree of protection	IP21
14	Dimension of product	45*45mm


Environmental requirements

Serial No.	Parameter	Description
1	Operating temperature	-10℃~+40℃;Operating
2	humidity	20%~90% RH
3	Storage temperature	-20℃~+85℃;storage
4	humidity	10%~95% RH
5	Resistance to pressure	≥3Kv/AC 1min
6	Isolation resistance	500v DC/100MΩ

Application:

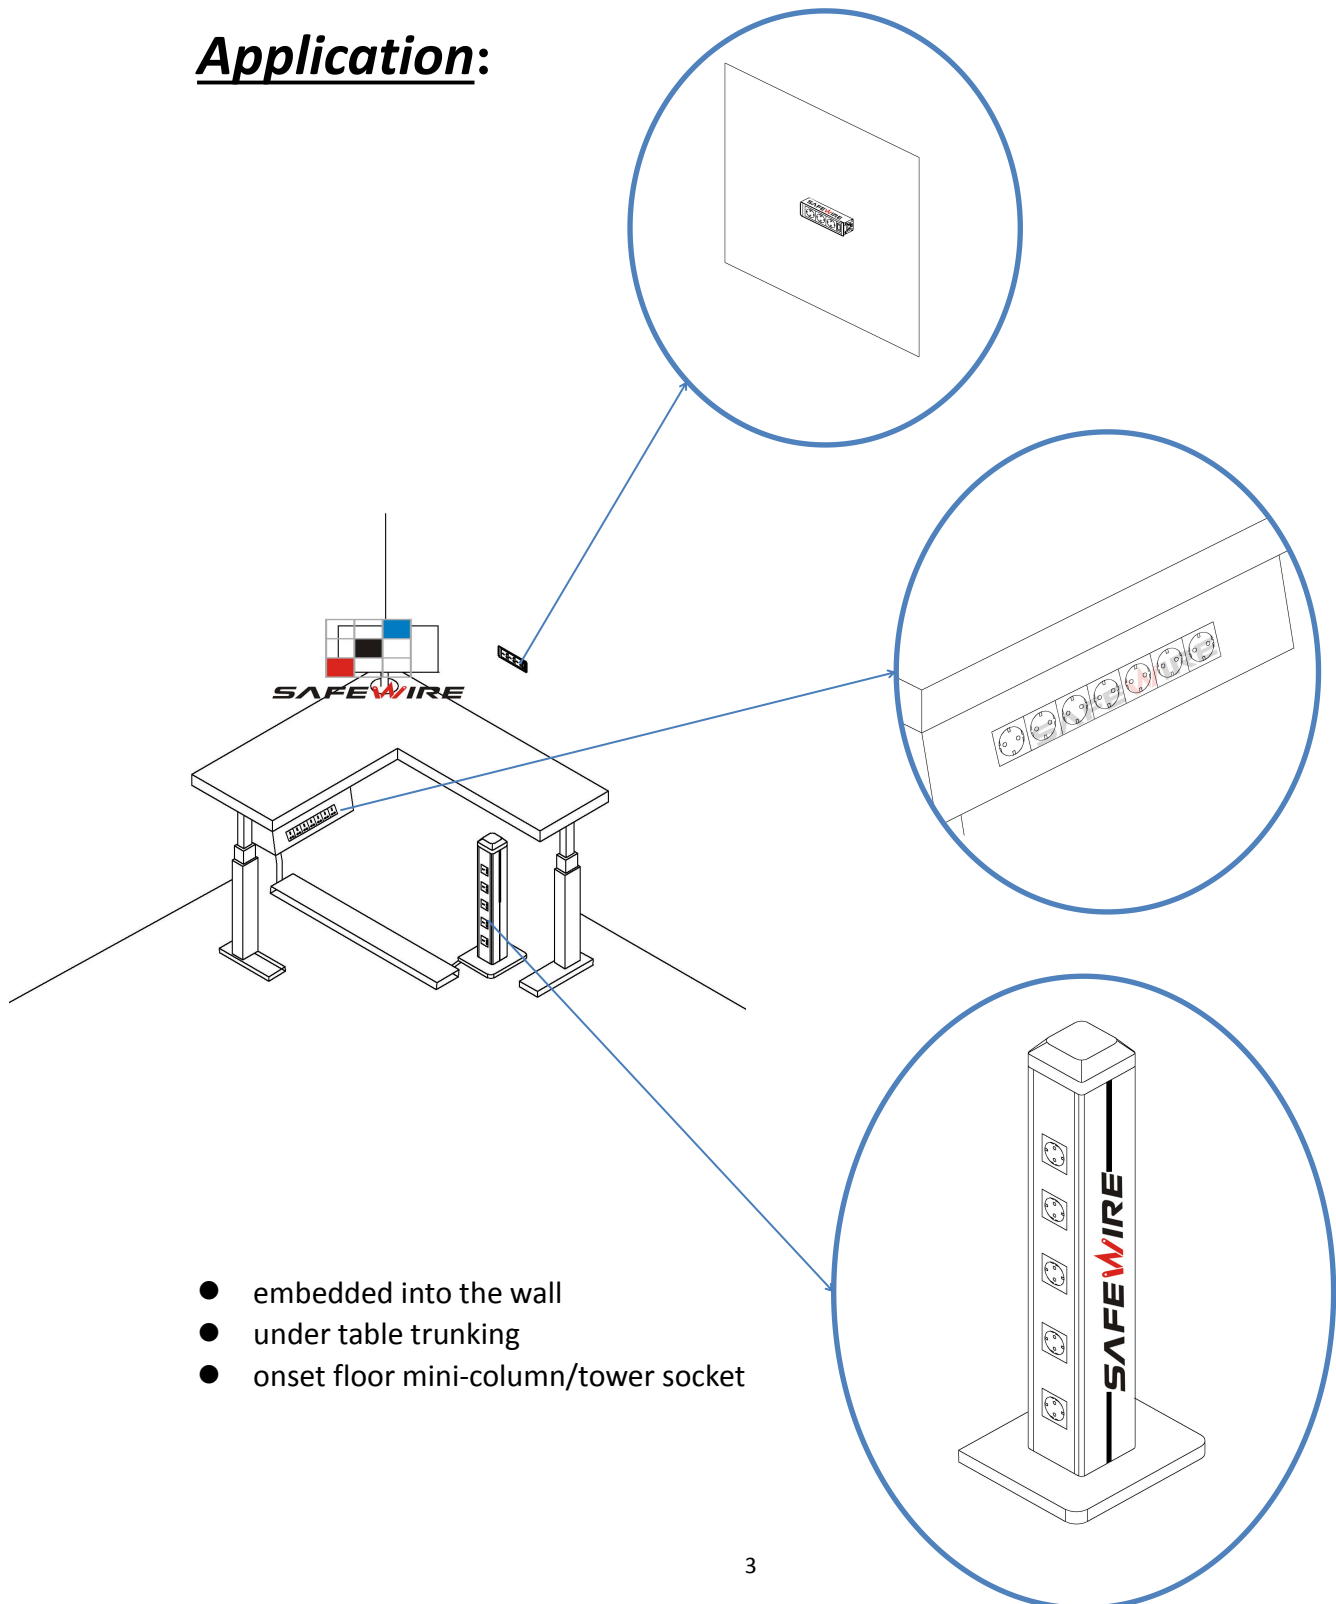

Feature :



1.5...2.5mm² for stranded cable (s)

1.5...2.5mm² for flexible cable (s)

1.5...2.5mm² for rigid cable (s)



insulation resistance tester



dielectric strength tester



Current tester

1. toolless installation
2. Single , double , triple , multi-socket using the connection block
3. With optional safety key
4. With red ,green ,white finish for UPS ,health sector or specific power supply.

Package:10 Pcs connector in poly bag separately with inner box. 10pcs inner boxes in one carton box

SafeWire

Package solution






F15C Outline drawing:

SAFEWIRE

F15C outline

Units:mm

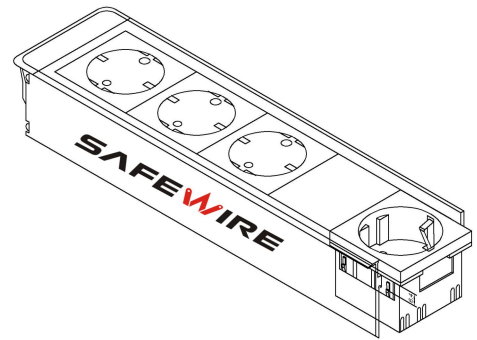

Installation Process

1. Insert the connection block in the contacts of the socket
2. Easy to install: Pre-assembled system product need only a screwdriver to have their cables connected and to fit them on the boxes-just a few seconds work for an incredible long-last installation.

 <p>ISET S.r.l. Sede Legale e Uffici Via Donatori di sangue, 9 - 46024 Moglia (MN) Tel. e fax +39 (0575) 598963 www.iset-italia.eu info@iset-italia.com</p>		<p>Cap. soc. i.v. € 10.200,00 Cod. Fis. e P.IVA Reg. Imprese 02/332750369 REA 02/332750369 Cap. soc. i.v. MN 0221096</p>	
<p>CERTIFICATE Certificat - Certificado - Сертификат - Zertifikat - 證書</p>			
<p>1) APPLICANT: (who finally puts the product on the market) Zhejiang New-Epoch Communication Industry Co., Ltd Develop Road, Wengyang Industry Zone, Yueqing, Zhejiang, China</p>			
<p>2) CERTIFICATE NO.: I/SETC-002020190424 FILE REFERENCE: SCC(19)-50094A-24-10-IEC</p>			
<p>3) ISET MARK:</p>			
<p>4) CAUTION ABOUT CE MARKING (Instruction for the Applicant who puts the product on the EU market): The label of the CE Marking on the left side should be not less than 5mm height. CE Marking and EC Declaration of Conformity are duties for the manufacturer or its applicant who puts the product on the market. This one is responsible to start the CE marking and certification procedure as required by the legislation in force. Only for the products which are completely included into specific Directives or Regulations will be necessary to appoint a Notified Body.</p>			
<p>5) TYPE OF PRODUCT: POWER SOCKET MODULE TRADE MARK: NEPECI MODEL(S): XJY-QB-37, XJY-QB-27, XJY-QB-28, XJY-QB-29, XJY-QB-31, XJY-QB-32, XJY-QB-35, XJY-QB-36, XJY-QB-37, XJY-QB-39, XJY-QB-40, XJY-QB-43, XJY-QB-30</p>			
<p>6) LIST OF DIRECTIVES / REGULATIONS / STANDARDS (as declared by the manufacturer itself) Low Voltage Directive 2014/35/EU IEC 60884-1:2002+A1:2006+A2:2013</p>			
<p>7) NOTE: The applicant is aware about the contents and information included in the MoC/MO04.06 Regulation for this type of Certificate that is considered totally accepted. The latest revision of the Regulation is available and can be downloaded from the website www.iset-italia.eu. This document is not referred to any evaluation that could be considered as included in the scope of the activities covered by the standard BS EN ISO/IEC 17065:2012 or European Regulation 765/2008.</p>			
<p>8) REMARK: Certificate is issued on voluntary application from the Client and it gives to the applicant the right to use and affix the ISET Mark (at point 3) on their products, even if it doesn't imply any assessment on the safety and compliance of the product. ISET declares that the only scope of the assessment is to verify the existence of the declaration issued by the manufacturer or an applicant under its own responsibilities.</p>			
<p>9) DATE OF ISSUE: 24/04/2019 EXPIRY DATE: 23/04/2024</p>			
<p>10) SIGNATURE: Miriam Camplone (On behalf of the Legal representative)</p>			
			
<p>This document is property of ISET Srl and any kind of reproduction is to be considered strictly forbidden.</p>			



Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China

Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com

4.Safety Warning:

1. For indoor use only.
- 2.This product must be installed/wired by a qualified electrician.

5.Attentions:

- 1.Protect children from touch skirt of socket.
- 2.Ensure current and voltage as rating current/voltage .Do not overload
3. Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.