


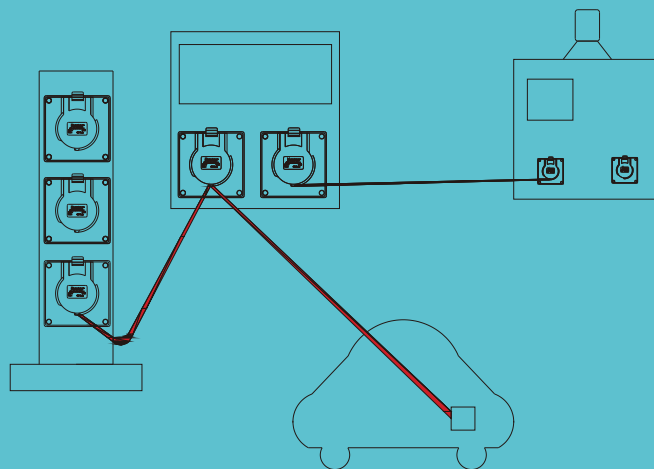

WENZHOU SAFEWIRE ELECTRIC CO.,LTD.

Address:Liushi town, Yueqing, Wenzhou , Zhejiang,China,325604

Tel:0086-577-61725370

Mail:info@safewirele.com

Wechat:happyhe7806

Skype:happy.he7806

Whatsapp:008618612380398

QQ:1119145917

Web:WWW.SAFEWIRELE.COM




For more details,
please visit:
www.safewirele.com
or scan this QR code.



20 years OEM factory for almost world-wide brand of floor sockets

 **SAFEWIRE**, Safe Wiring System
Since 1998; 20 years OEM factory for global brand

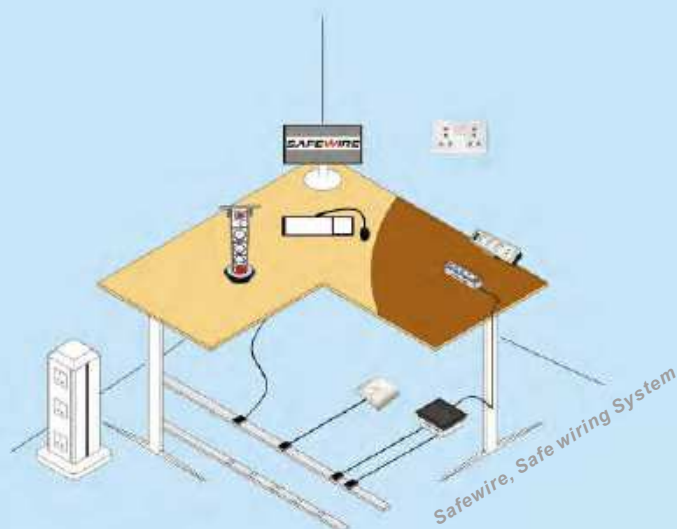

Floor box / Floor socket / Cable management



Safewire 2023-2024 Season



About Us

WENZHOU SAFEWIRE ELECTRIC CO.,LTD.

We provided OEM and ODM service for most worldwide brands. And exported products & service to over 56 countries in Europe, Australia, Middle East and Southeast etc. When our clients purchase our products, they know they are getting value for their money, with performance, reliability and quality. Every product carries our personal guarantee and service commitment. Our team stands behind every product we sell-even years after it is installed. We now offer reliable years warranty on all Safewire products, covering parts and labor. We have built our reputation on this.

Of course we also have a huge range of shapes, sizes, boxes with IP Ratings and your choice of a metal finish or inlay, all readily available from your local electrical wholesaler. If none of our options are suitable for your application, please contact us about customization solution for you.

The world will keep changing. This is what keeps Safewire ahead. Listening to, and acting on, customer feedback sets our products apart from others. Safewire, On the way!



Our Lab

Our object is to deliver professional connected wiring solutions that are based on new business models and offer new services for all kind of applications.

Today, Safewire is an active member of important associations and consortiums in electric industry-both worldwide and on a regional level.

- A) Associations/ Alliances IEC; CQC;
- B) Certification bodies ISO, CE, RoHS, EN/EC,



Equipment

We produce high quality electric products and export all over the world.

Safewire Cable Management , Power Distribution Electric & Electrician products etc.



Our production facilities include:

- Factory: 30,000 square meters building areas;
- R&D department: 3D design and engineers with vast experience and knowledge.
- Tools department: We have brand new CNC center with erosion machines, trilling machines and saw machines.
- Press department: Equipped with several new press machines for up to 100 t and 10 lathe machines metal cutting and bending machines. etc.
- Galvanization department: Newly refurbished automatic galvanizing line. We can make Ag,Zn, Ni and Tn plating on our metal and copper parts.
- Own independent electrical laboratory--Full routine testing for our own products, 300 sqm of advanced technology lab.







BS1363 EC-RED CB FC

CE certificate, report and ROHS certificate

3rd

Party Test Certificate

Although not a mandatory requirement the company supports as a policy that all functional products should undergo a third party test certification process. Please noted that our products fulfill type testing to the National Standards GB/T23307 and International standards IEC60884 can demonstrate compliance and product reliability.



IP55 test certificate and report



FCC,RED Certification




SAA Certification





Tuv and CE Certification



BS1363 UKCA Certification

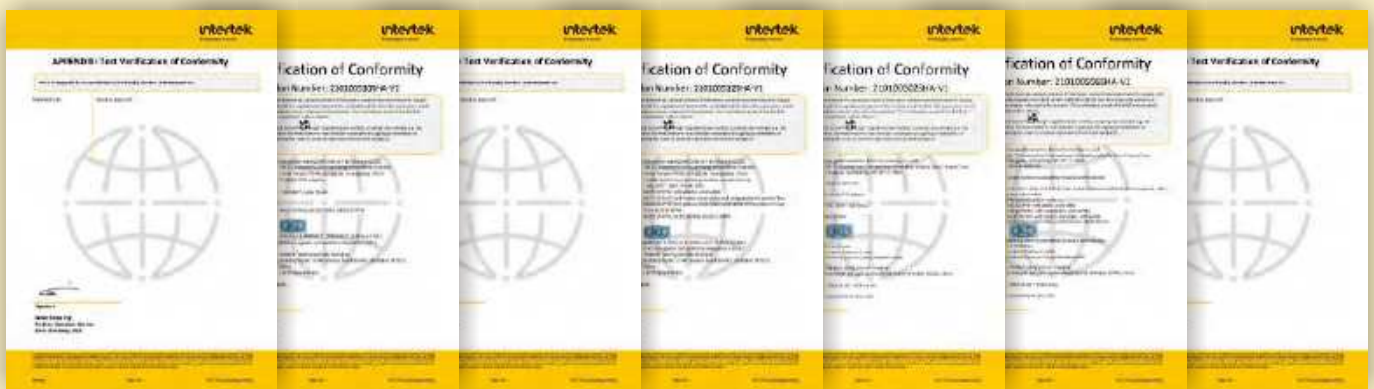

Delivery to global market


1	法国 France		14	印度 India		27	新加坡 Singapore	
2	德国 Germany		15	斯里兰卡 Sri Lanka		28	印度尼西亚 Indonesia	
3	西班牙 Spain		16	巴基斯坦 Pakistan		29	越南 Vietnam	
4	波兰 Poland		17	阿联酋 United Arab Emirates		30	南非 South Africa	
5	俄罗斯 Russia		18	卡塔尔 Qatar		31	尼日利亚 Nigeria	
6	澳大利亚 Australian		19	伊拉克 Iraq		32	摩洛哥 Morocco	
7	韩国 Korea		20	伊朗 Iran		33	莫桑比克 Mozambique	
8	加拿大 Canada		21	以色列 Israel		34	喀麦隆 Cameroon	
9	巴拉圭 Paraguay		22	哈萨克斯坦 Kazakhstan		35	柬埔寨 Cambodia	
10	阿根廷 Argentina		23	乌兹别克斯坦 Uzbekistan		36	约旦 Jordan	
11	厄瓜多尔 Ecuador		24	香港 Hong Kong		37	塞浦路斯 Cyprus	
12	秘鲁 Peru		25	马来西亚 Malaysia		38	沙特 Saudi Arabia	
13	智利 Chile		26	泰国 Thailand			...	

Safewire products cover IEC standard, BS standard and others etc.

————— Your are the next

Application Area

1. Switch & socket Electric
2. Lighting
3. Building Material & Steel tray
4. Optic cable and Telecom accessories
5. Low voltage equipment
6. Video, Audio and Electronic accessories
7. PVC and trunking system
8. Office Furniture
9. Security and Automation
10. Power distribution equipment

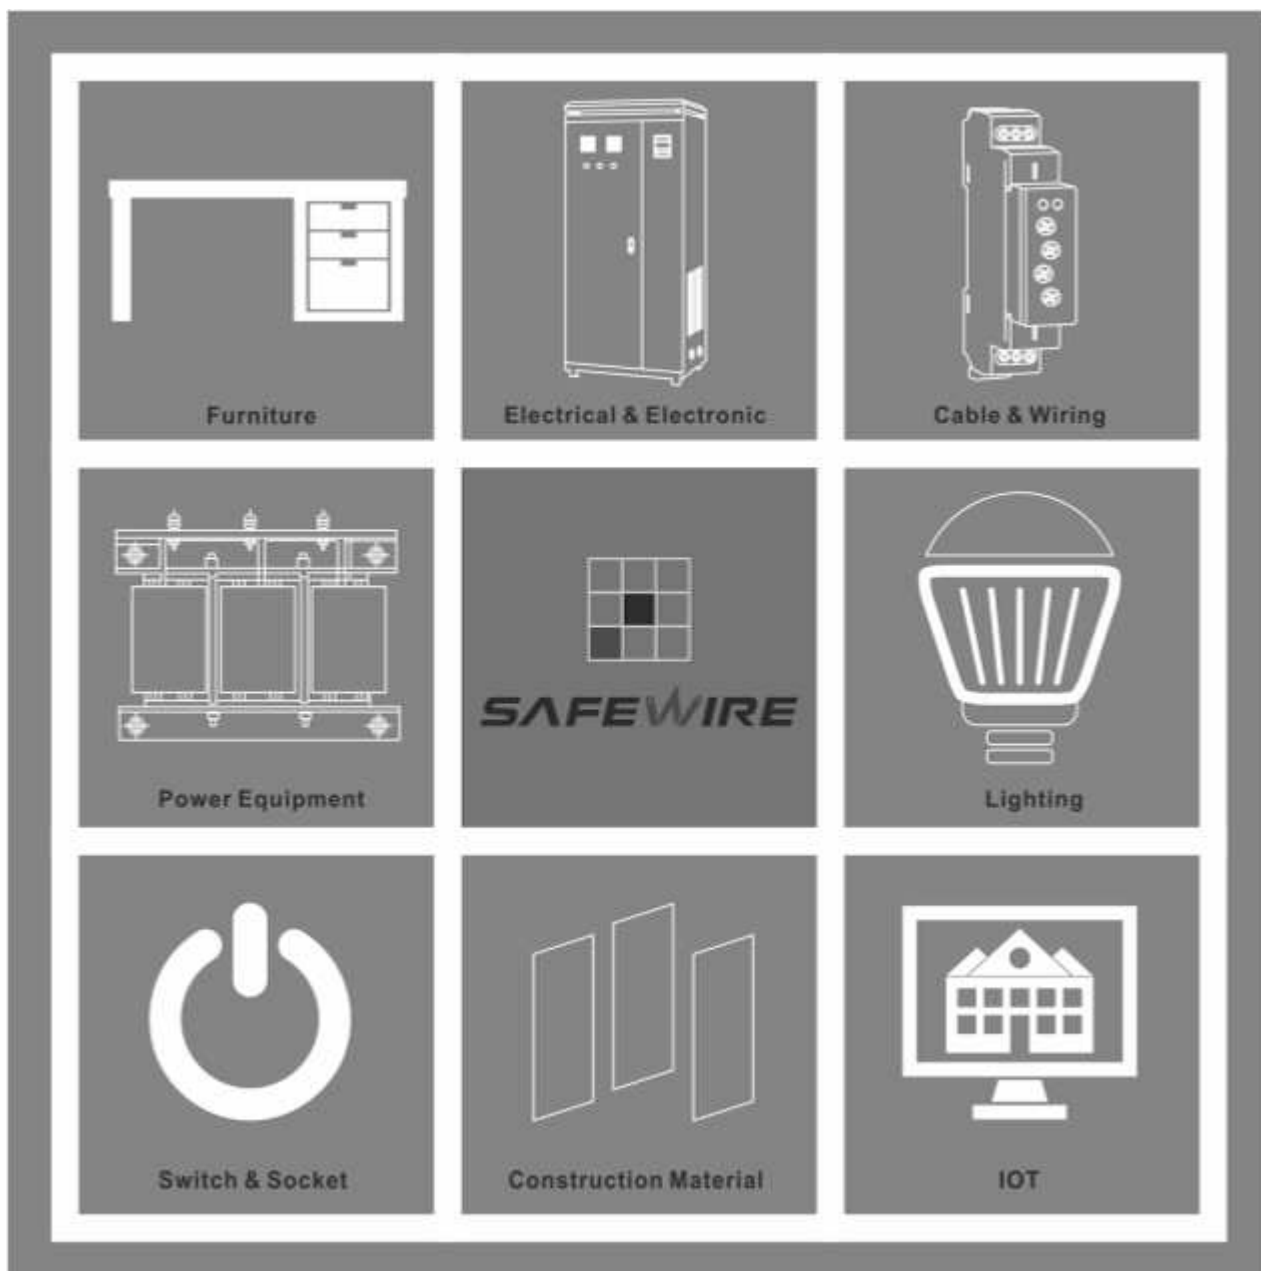

1. Dubai Airport



Product picture



2. Paraguay Flooring in bank



3. National University of Singapore



4. Bank in Africa office furniture



5. Malaysia Kuala Lumpur TRX Shopping Plaza & Roof Garden



6. Kazakhstan factory flooring



This is not including Non-Disclose Agreement Project

GUARANTEE OF AFTER-SALE SERVICE

Safewire Electric Co.,Ltd assure that our products are strictly in accordance with the ISO management system ,now we guarantee our products after-sale service as this following :

- 1 Our company guarantees that the products will be strictly inspected before shipped from factory and the QA rate of products will 100%.
- 2 Our company guarantees that within 1 year from date of receipt and finish installation if some problems occure, our company is responsible for replace free of charge.If beyond warranty period, we will provide you with corresponding paid services within a reasonable range.
- 3 Our electrical accessories is guaranteed to give satisfactory performance for life provided the following conditions exist.
 - a.The accessory has been properly installed by a competent person.
 - b.The accessory has been installed in accordance with the wiring regulations and amendments in force at the time of installation, and that it has not been tampered with or subjected to improper or abnormal use.
- 4.This following statitution will be paid service:.
 - * exceeding the warranty period;
 - * failure to provide purchase evidence/documents;
 - * damage caused by failure to use or repair the product as required in the product manual (pay special attention to water inspur into, damage by drop or other not right way by people);
 - * if the customer repairs or disassemblesby himself or by other person who not authorized by our company;
 - * damage caused by wiring with bad quality level communication cables;
 - * failureor damage of products caused by major force such as flood,fire,lightning, eather-quake etc.

When problems occur during the use of the product, our technical engineer will actively respond.Any problem of product quality ,our company will guarantee a clear reply or solution within reasonable time.

Remark: Safewire Electric Co.,Ltd reserves the right to modify, at any moment, in the consumer's best interests, the features and components of its products without prior notice.

Safewire Electric Co.,Ltd




Customized Design & Production

DESIGN SERVICE From "0" to "1"


Design service integrating appearance, structure, application and production





HTD-624AS

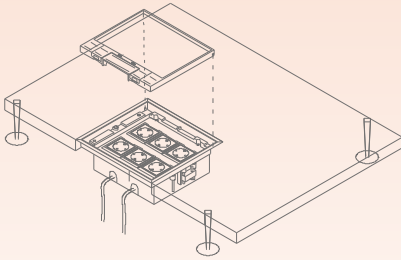


HTD-180




HTD-1602







FZ-532

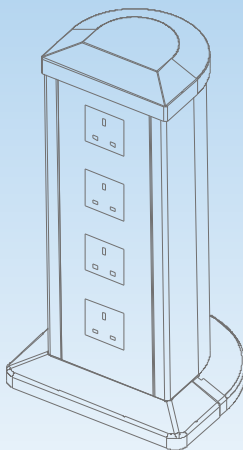

HTD-610S

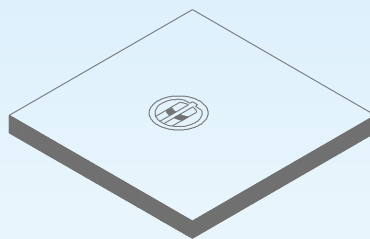

SCF-A01



SCF: Underfloor/Raised floor box



P03

POB: Heavy Duty Floor box




P13

SOB: Serviced Outlet Box



P24

FUS: Flip Up socket

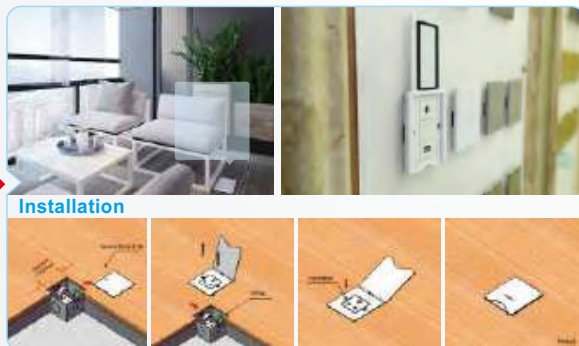

P29

MCS: Mini-Columns Socket & utility column



P34

SCF Series Features

1. More capacity



8 Way Modules



12 Way Modules




16 Way Modules



24 Way Modules


A) 4 compartment 77mm bridges of switch socket:



B).3 compartment 146 & 86mm bridges of switch socket:



C).3 compartment 86*77mm bridges of switch socket:



D).1 compartment of 120 bridges of socket and data:



2. More optional box for raised floor or concrete floor:



Galvanized Steel



Plastic Bottom Box



Stainless steel Bottom Box

3. More optional installation:



Vertical Installation



Horizontal Installation



Vertical & horizontal Installation

4. More optional switch & socket



45*45mm Modules



86 Type Compartment



120 Switch Board

5. More Optional Coverplate:



HTD-XXXAS Cover middle can be filled




HTD-XXXSS Filled with Plastic plate




HTD-XXXSP Filled with SUS plate

Advantage

1. More capacity

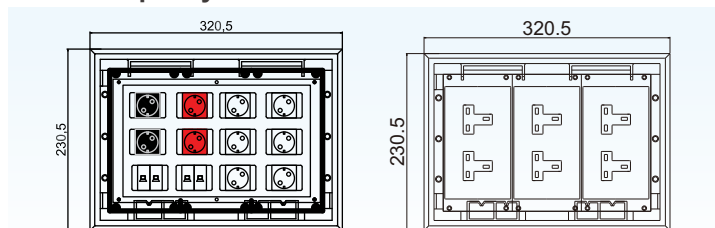

2. More installation:

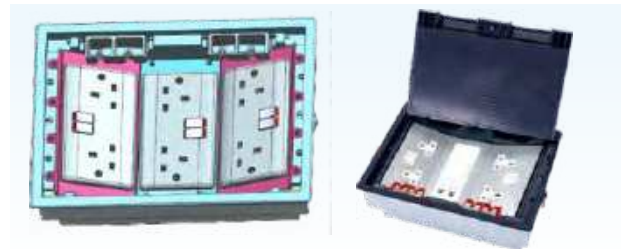


3. More International outlet:


1. 45*45mm Modules




2. 128 Type series




3. 86/146 Type module socket




4. 5V 4.2A USB charger, HDMI, Cat6, RCA, and so on



4. Optional Raised/underfloor system:


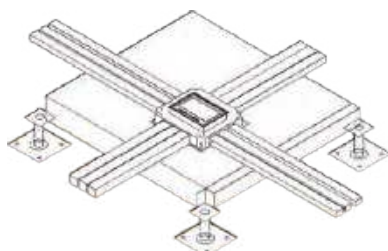


Raised floor



Underfloor

5. Max.8/10mm cavity for marble/carpet

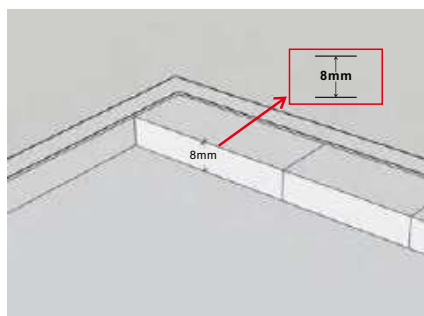

For Flush Floor



For Raised Floor Box




SCF: Underfloor/Raised floor box

HTD-622AS/SS/SP-45



Panel Material	AS	8mm Thickness of concavity		
	SS	Plastic		
	SP	Stainless Steel		
Panel Dimension (mm)		169*141.5		
Cutout (mm)		(130-135)*(157-165)*(76-110)		
Capacity Of Modules		8 ways 45modules		
Applicable		Raised floor		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
11.5	41*36*32	0.0472	12	

Outline Drawing:

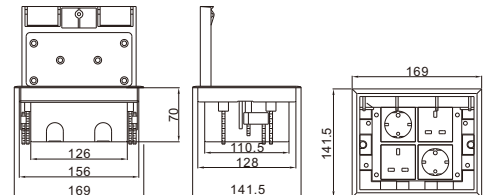


HTD-624B



Panel Material	AS	8mm Thickness of concavity		
	SS	Plastic		
	SP	Stainless Steel		
Panel Dimension (mm)		245*225		
Cutout (mm)		213*233		
Capacity Of Modules		86*86mm switch socket*4		
Applicable		Raised floor		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
11.2	53.5*29.5*48	0.0734	8	

Outline Drawing:

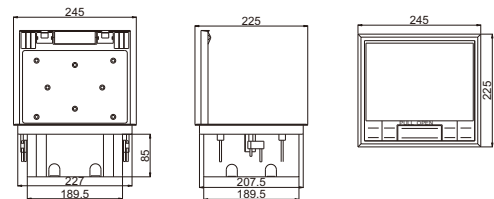


HTD-624AS/SS/SP-120



Panel Material	AS	8mm Thickness of concavity		
	SS	Plastic		
	SP	Stainless Steel		
Panel Dimension (mm)		245*225		
Cutout (mm)		(210-215)*(230-235)*(76-110)		
Capacity Of Modules		120 type module*2		
Applicable		Raised floor		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
11.2	53.5*29.5*48	0.0758	8	

Outline Drawing:

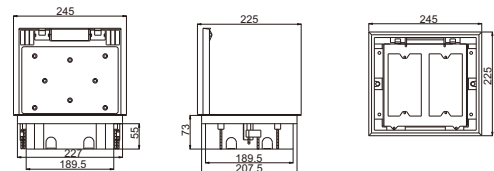


HTD-624AS/SS/SP-86



Panel Material	AS	8mm Thickness of concavity		
	SS	Plastic		
	SP	Stainless Steel		
Panel Dimension (mm)	245*225			
Cutout (mm)	(210-215)*(230-235)*(76-110)			
Capacity Of Modules	86*86mm module socket *4			
Applicable	Raised floor			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN	
11.2	52.5*35.5*24	0.0758	4	

Outline Drawing:

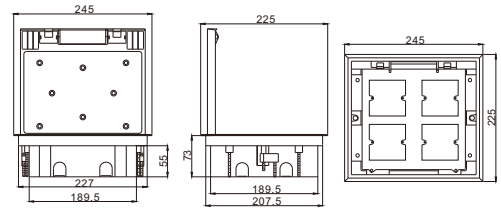


HTD-624AS/SS/SP-45



Panel Material	AS	8mm Thickness of concavity	
	SS	Plastic	
	SP	Stainless Steel	
Panel Dimension (mm)		245*225	
Cutout (mm)		(210-215)*(230-235)*(76-110)	
Capacity Of Modules		12 ways 45modules	
Applicable		Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
11.2	53.5*29.5*48	0.0758	8

Outline Drawing:

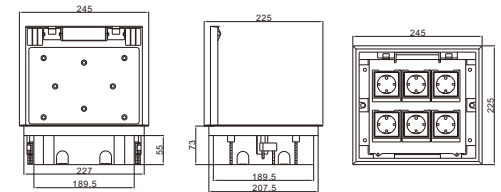


HTD-624C



Panel Material	AS	8mm Thickness of concavity	
	SS	Plastic	
	SP	Stainless Steel	
Panel Dimension (mm)		245*225	
Cutout (mm)		(210-215)*(230-235)*(76-110)	
Capacity Of Modules		12 ways 45modules	
Applicable		Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
11.2	53.5*29.5*48	0.0758	8

Outline Drawing:

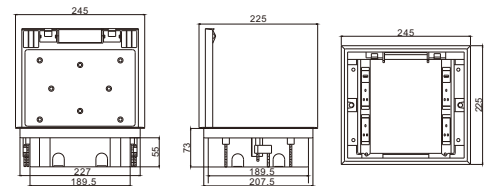


HTD-628AS/SS/SP-45



Panel Material	AS	8mm Thickness of concavity		
	SS	Plastic		
	SP	Stainless Steel		
Panel Dimension (mm)	328*230.5			
Cutout (mm)	(305-310)*(210-215)			
Capacity Of Modules	16 ways 45modules			
Applicable	Raised floor			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN	
11.2	52.5*35.5*24	0.0447	4	


Outline Drawing:

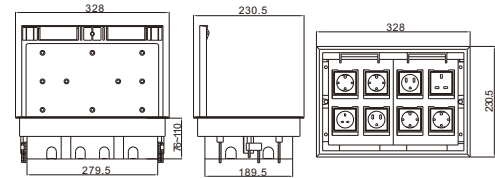

HTD-628AS/SS/SP-4524



Panel Material	AS	8mm Thickness of concavity		
	SS	Plastic		
	SP	Stainless Steel		
Panel Dimension (mm)		328*230.5		
Cutout (mm)		(305-310)*(210-215)		
Capacity Of Modules		24 ways 45modules		
Applicable		Raised floor for ups power supply		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN	
11.2	52.5*35.5*24	0.0447	4	

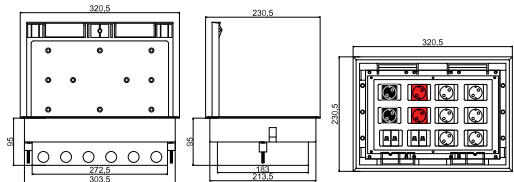


HTD-626B AS/SS/SP-CK



Panel Material	AS	8mm Thickness of concavity	
	SS	Plastic	
	SP	Stainless Steel	
Panel Dimension (mm)		328*230.5	
Cutout (mm)		(305-310)*(210-215)*99	
Capacity Of Modules		16 ways 45modules	
Applicable		Concrete floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
11.2	52.5*35.5*24	0.0447	4

Outline Drawing:

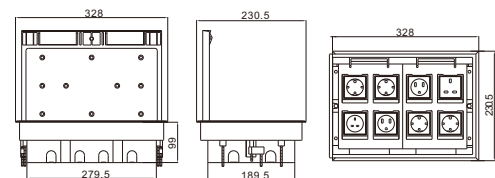


HTD-626AS/SS/SP-45



Panel Material	AS	8mm Thickness of concavity	
	SS	Plastic	
	SP	Stainless Steel	
Panel Dimension (mm)		320.5*230.5	
Cutout (mm)		(305-310)*(210-215)*99	
Capacity Of Modules		16 ways 45modules	
Applicable		Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16.5	55*37*29	0.0590	4

Outline Drawing:

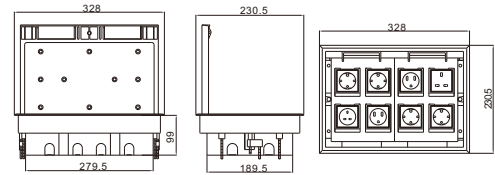


HTD-626AS/SS/SP-120



Panel Material	AS	8mm Thickness of concavity	
	SS	Plastic	
	SP	Stainless Steel	
Panel Dimension (mm)		320.5*230.5	
Cutout (mm)		(305-310)*(210-215)*(76-110)	
Capacity Of Modules		120 type module*4	
Applicable		Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
15.5	55*37*29	0.0590	4

Outline Drawing:

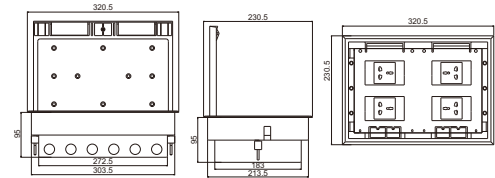


HTD-626AS/SS/SP-86



Panel Material	AS	8mm Thickness of concavity	
	SS	Plastic	
	SP	Stainless Steel	
Panel Dimension (mm)		320.5*230.5	
Cutout (mm)		(305-310)*(210-215)*(76-110)	
Capacity Of Modules		6*86mm module socket *3	
Applicable		Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
15.5	55*37*29	0.0590	4

Outline Drawing:

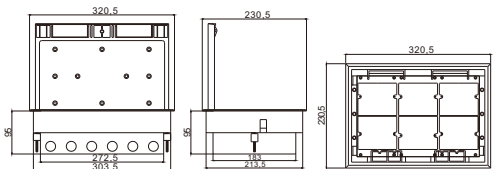


HTD-626RCD



Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	320.5*230.5	
Cutout (mm)	(305-310)*(210-215)*(76-110)	
Capacity Of Modules	86*146mm RCD socket *3	
Applicable	Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)
16	55*37*29	0.0590
		Set/CTN
		4

Outline Drawing:

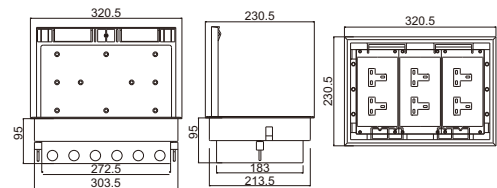


HTD-628AS/SS/SP-C



Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	328*230.5	
Cutout (mm)	(305-310)*(210-215)	
Capacity Of Modules	16 ways 45modules	
Applicable	Concrete floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)
11.2	52.5*35.5*24	0.0447
		Set/CTN
		4

Outline Drawing:

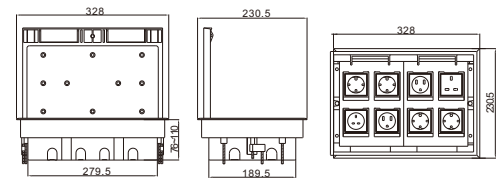


B-H628-C stainless box

HTD-622AS/SS/SP-C



Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	169*141.5	
Cutout (mm)	(130-135)*(157-165)*(76-110)	
Capacity Of Modules	8 ways 45 type modules	
Applicable	Concrete floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)
11.5	41*26*32	0.0472
		Set/CTN
		12

Outline Drawing:

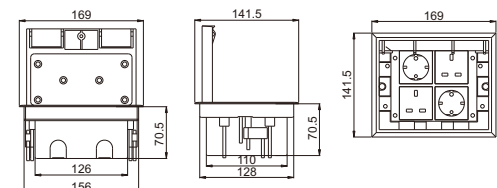

B-H622-C stainless box




B-H624-C stainless box

HTD-624AS/SS/SP-C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	245*225	
Cutout (mm)	(210-215)*(230-235)*(76-110)	
Capacity Of Modules	12 ways 45modules	
Applicable	Concrete floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)
11.2	53.5*29.5*48	0.0758
		Set/CTN
		8

Outline Drawing:

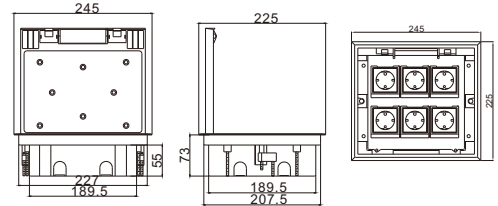


B-H626-C stainless box

HTD-626AS/SS/SP-C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	328*230.5	
Cutout (mm)	(305-310)*(210-215)*(76-110)	
Capacity Of Modules	16 ways 45modules	
Applicable	Concrete floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)
16.5	55*37*29	0.0590
		Set/CTN
		4

Outline Drawing:

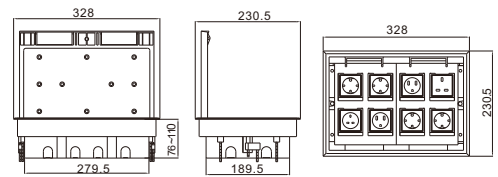


HTD-626B




Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	320.5*230.5	
Cutout (mm)	(305-310)*(210-215)*(76-110)	
Capacity Of Modules	86*146mm module socket *3	
Applicable	Raised floor	
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)
16	55*37*29	0.0590
		Set/CTN
		4

Outline Drawing:

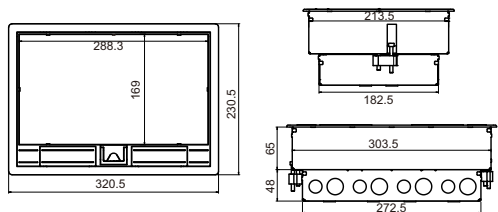

HTD-626B Optional Configuration


A) 3 compartment

			
146mm side-install&86mm	146mm side-install&45mm	Network module & 86mm&146mm	86mm&Network module
			
120mm bridge	146mm bridge	MCB&146mm Circuit breaker	Item:HTD-626-RCD
			
			146mm bridge

B) 4 compartment



146mm&Network module

C) Selling point

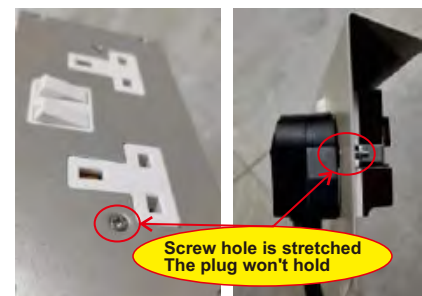


Remark:
Neutral line: blue
Fire line: Brown
Ground wire: yellow-green

HTD-684A



Panel Dimension (mm)	223*107		
Capacity Of Modules	12 ways 45 modules		
Applicable	Wall-mounting		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
6.2	45*30*18	0.024	12

Outline Drawing:

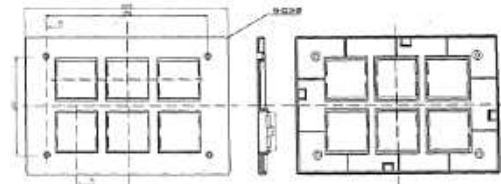


SCF-A01



Panel Material	PC		
Panel Dimension (mm)	270x270		
Cutout (mm)	264x264		
Capacity Of Modules	3compartments/45mm type		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
24	59*31*28	0.0512	6

Outline Drawing:

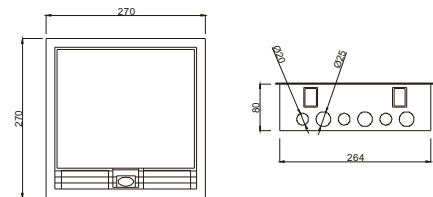


SCF-T01



Panel Material	PC		
Panel Dimension (mm)	320x320		
Cutout (mm)	264x264		
Capacity Of Modules	3compartments/45mm type		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22	59*31*28	0.0512	6

Outline Drawing:

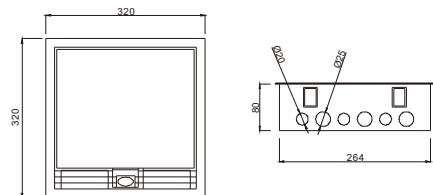


SCF-Q01



Panel Material	PC		
Panel Dimension (mm)	273x273		
Cutout (mm)	264x264		
Capacity Of Modules	3compartments/45mm type		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
24	59*31*28	0.0512	6

Outline Drawing:

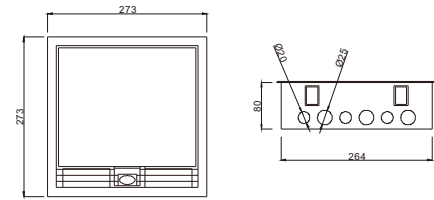


SCF-F01



Panel Material	PC		
Panel Dimension (mm)	320x320		
Cutout (mm)			
Capacity Of Modules	3compartments/45mm type		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22	59*31*28	0.0512	6

Outline Drawing:

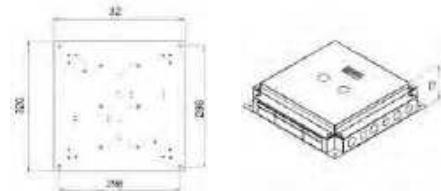



HTD-610S



Panel Material	ABS		
Panel Dimension (mm)	Ø110		
Cutout (mm)	80x80		
Capacity Of Modules	3way 45modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
3.7	44.5*30.5*21	0.285	12

Outline Drawing:



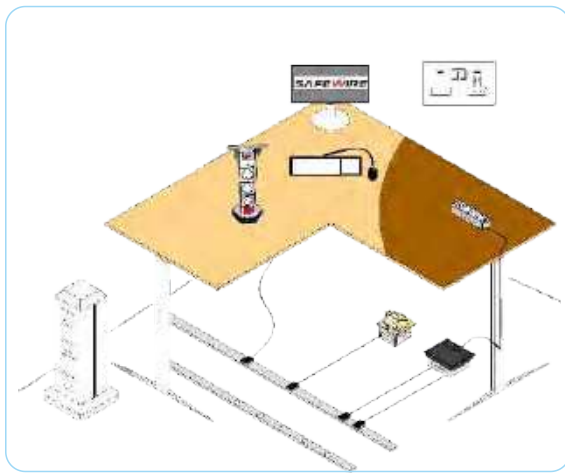

POP Series Features

1. Customization design & production



Access floor & Heavy duty Recess floor




Bridge & Support:



2. Supply with SKD parts or finished products, save cost: save cost, save money for you!



Advantage of Safewire floorbox

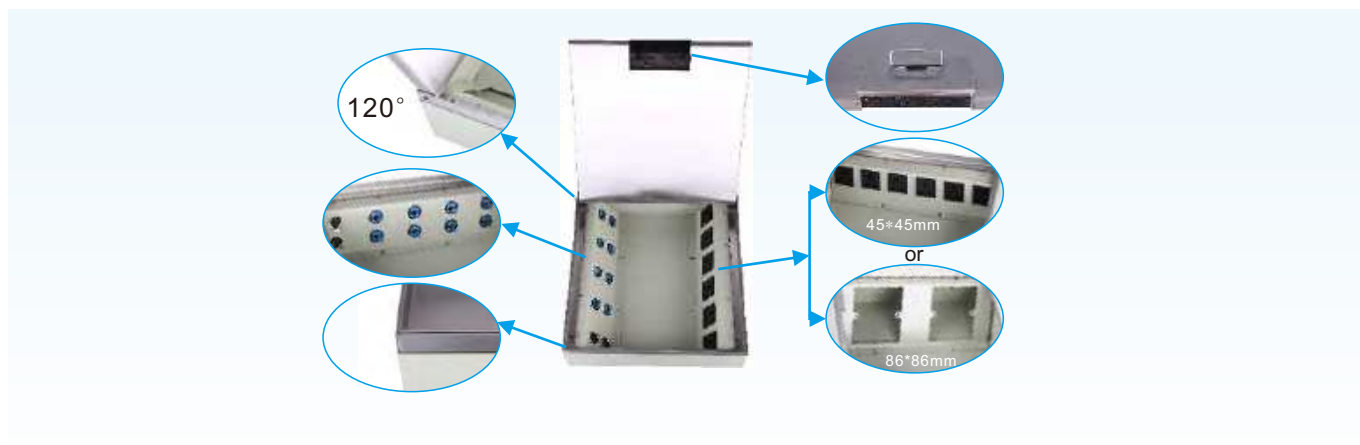

Safewire floorbox Application in different floor system




POB: Heavy Duty Floor box

HTD-120A-K/KP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	120*120		
Cutout (mm)	113*113		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
21.1	46*25.5*25.5	0.0299	15

Outline Drawing:

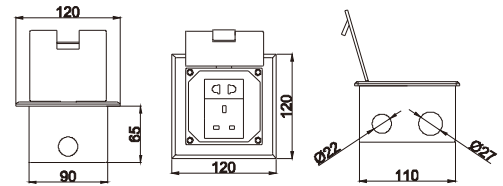


HTD-120B-K/KP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	120*120		
Cutout (mm)	113*113		
Capacity Of Modules	4 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
21.1	46*25.5*25.5	0.0299	15

Outline Drawing:

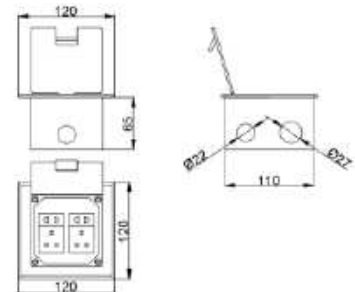


HTD-146K/KP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	146*146		
Cutout (mm)	138*138		
Capacity Of Modules	86*86mm modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
28.9	49*32*22	0.0345	12

Outline Drawing:

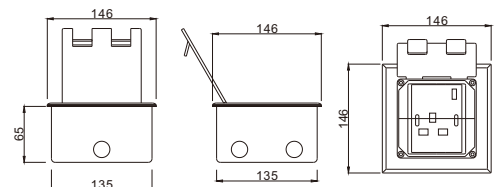


HTD-130-CK



Panel Material	Stainless steel		
Panel Dimension (mm)	130*130		
Cutout (mm)	130*130		
Capacity Of Modules	2*45type or 1*86type outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
6.45	32*28*16	0.0143	6

Outline Drawing:




HTD-145CK-CKP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	210*145			
Cutout (mm)	203*138			
Capacity Of Modules	6 ways 45 modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
26.3	17.5*31*23	0.0125	10	

Outline Drawing:

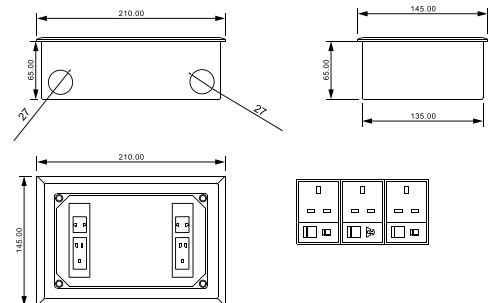


HTD-145K/KP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	210*145			
Cutout (mm)	203*138			
Capacity Of Modules	9 ways 45 modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
26.3	17.5*31*23	0.0125	10	

Outline Drawing:

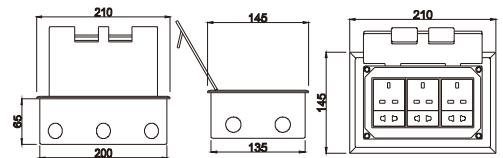


HTD-146K/KP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	146*146			
Cutout (mm)	138*138			
Capacity Of Modules	6 ways 45 modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
27.98	49*32*22	0.0345	12	

Outline Drawing:

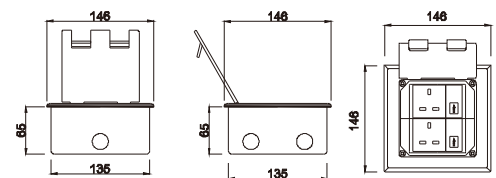


HTD-180K/KP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	180*180			
Cutout (mm)	173*173			
Capacity Of Modules	10 ways 45 modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
27.57	32*55*33	0.0581	10	

Outline Drawing:

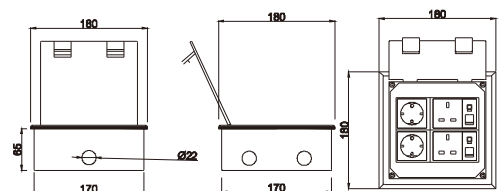


HTD-210CK/CKP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	210*210		
Cutout (mm)	198*198		
Capacity Of Modules	10 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22.8	47.5*39*27	0.0500	8

Outline Drawing:

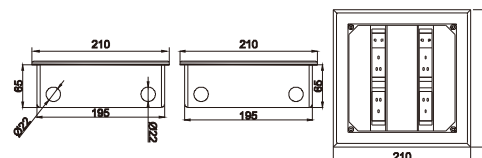


HTD-210K/KP-86



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	210*210		
Cutout (mm)	198*198		
Capacity Of Modules	86*86mm modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
38.3	37.3*22*45	0.0369	10

Outline Drawing:

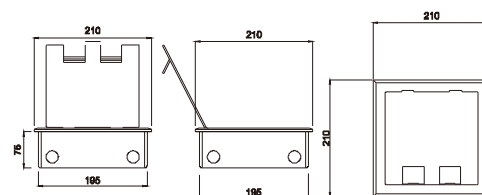


HTD-210K/KP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	210*210		
Cutout (mm)	198*198		
Capacity Of Modules	15 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
38.3	37.3*22*45	0.0369	10

Outline Drawing:

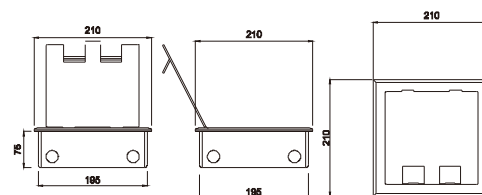


HTD-250K/KP-86



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	250*250		
Cutout (mm)	232*202		
Capacity Of Modules	3*2gang compartments switch socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

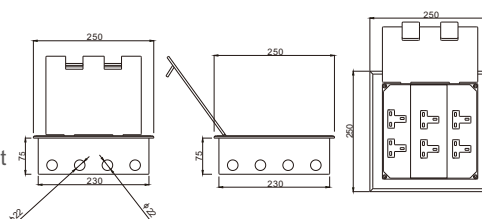


HTD-250K/KP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	250*250		
Cutout (mm)	233*233		
Capacity Of Modules	15 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

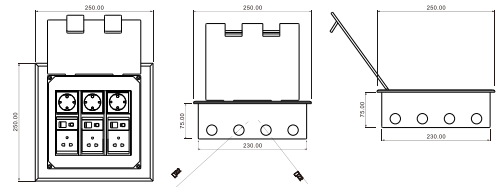


HTD-250CK



Panel Material	Stainless steel		
Panel Dimension (mm)	250*250		
Cutout (mm)	245*245		
Capacity Of Modules	side-mounting gangs		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

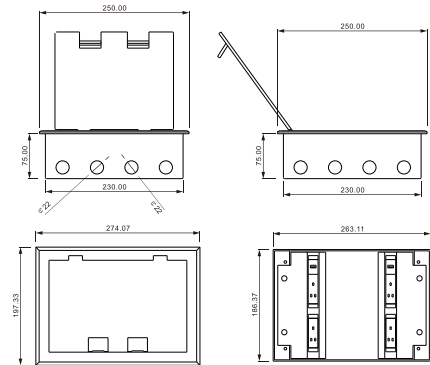


HTD-320K/KP-230



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	320*230		
Cutout (mm)	302*212		
Capacity Of Modules	Side-mounting Gangs		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

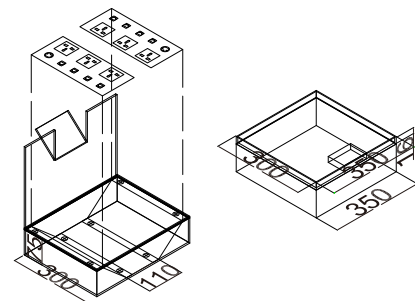


HTD-250K/KP-C



Panel Material	Stainless Steel		
Panel Dimension (mm)	250*250		
Cutout (mm)	245*245		
Capacity Of Modules	Side-mounting Gangs		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

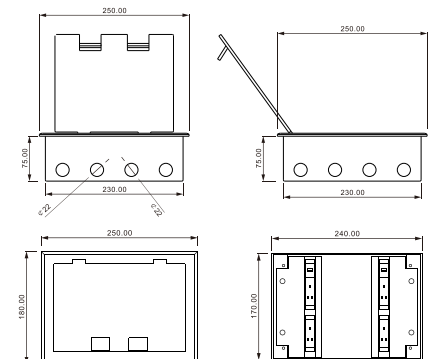


HTD-290K/KP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	φ 130			
Cutout (mm)	122*122			
Capacity Of Modules	2 ways modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
217	54*31*27	0.452	60	

Outline Drawing:

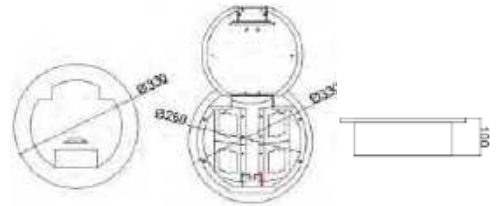


HTD-2702K/KP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	270*146			
Cutout (mm)	263*138			
Capacity Of Modules	12 ways 45 modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
26.3	17.5*31*23	0.0125	10	

Outline Drawing:

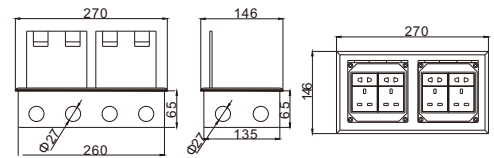


HTD-300K/KP



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	300*150			
Cutout (mm)	293x143			
Capacity Of Modules	12 ways 45 modules			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
26.3	17.5*31*23	0.0125	10	

Outline Drawing:




HTD-320K/KP-86



Panel Material	Brass alloy/Stainless steel			
Panel Dimension (mm)	320*230			
Cutout (mm)	302*212			
Capacity Of Modules	4*2gang compartments switch socket			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
27.55	47.5*39*27	0.0500	10	

Outline Drawing:

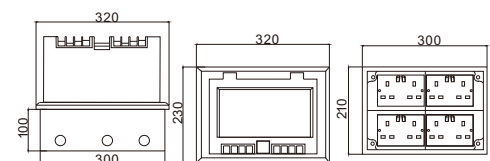


HTD-127ZAP



Panel Material	Stainless steel		
Panel Dimension (mm)	127*127		
Cutout (mm)	125*125		
Capacity Of Modules	3 ways modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
6.45	32*28*16	0.0143	6

Outline Drawing:

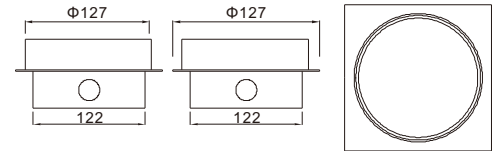


HTD-130LK/LXP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	Φ 130		
Cutout (mm)	122*122		
Capacity Of Modules	2 ways modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
6.45	32*28*16	0.0143	6

Outline Drawing:

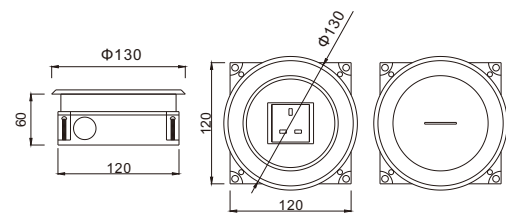


HTD-120E



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	Φ120		
Cutout (mm)	120*120*60		
Capacity Of Modules	4 ways modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
6.45	32*28*16	0.0143	6

Outline Drawing:

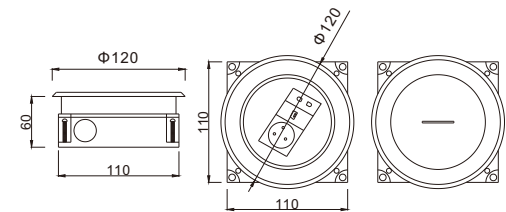


HTD-140YK/YKP



Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	Φ140		
Cutout (mm)	125*125		
Capacity Of Modules	2 ways modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
14.25	32*29*32	0.0297	12

Outline Drawing:




HTD-120-AV



Panel Material	Stainless Steel		
Panel Dimension (mm)	130*115		
Cutout (mm)	103*103		
Capacity Of Modules	Customization AV socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
38.3	37.3*22*45	0.0369	10

Outline Drawing:




HTD-220-AV



Panel Material	Stainless Steel		
Panel Dimension (mm)	230*130		
Cutout (mm)	210*110		
Capacity Of Modules	Customization AV socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
26.3	17.5*31*23	0.0125	10

Outline Drawing:

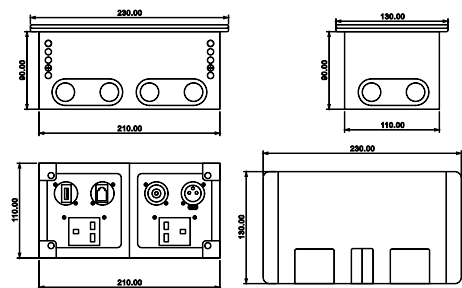


HTD-160LX



Panel Material	Brass alloy/Sta		
Panel Dimension (mm)	Φ160		
Cutout (mm)	148*148		
Capacity Of Modules	2 ways modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
6.45	32*28*16	0.0143	6

Outline Drawing:

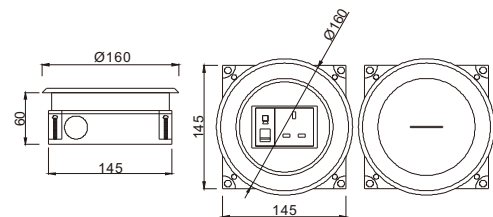


HTD-210-AV



AS Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	210*210		
Cutout (mm)	198*198		
Capacity Of Modules	Custom AV socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

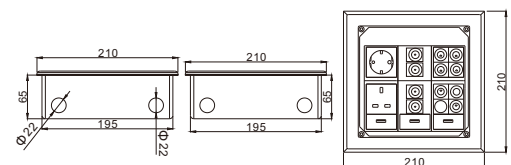


HTD-146-I



AS Panel Material	Stainless steel Brass Alloy		
Panel Dimension (mm)	146*146		
Cutout (mm)	138*138		
Capacity Of Modules	2 * IP66 Low pressure socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.98	49*32*22	0.0345	12

Outline Drawing:

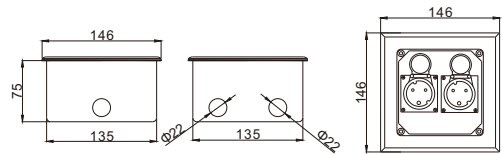


HTD-210C



AS Panel Material	Stainless steel or brass		
Panel Dimension (mm)	210*210		
Cutout (mm)	195*195		
Capacity Of Modules	1way 86 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.55	47.5*39*27	0.0500	10

Outline Drawing:

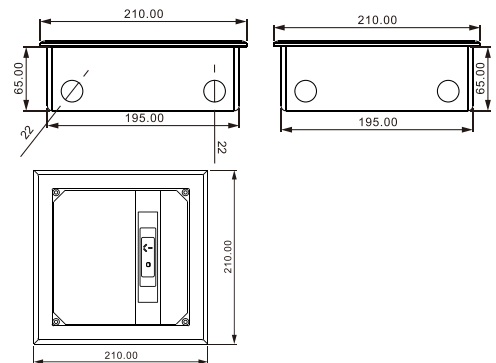

The HTD-210C product is a configurable module:



AS302

1 G 2 way switch horizontal



AS315

10A horizontal double powerpoints



AS315-USB(2A)

10A USB horizontal double powerpoints 2A



AS320

1 G TV socket



AS322


TV socket+ Tel socket

SF-DBMI-01



AS Panel Material	iron spray paint		
Panel Dimension (mm)	200*260*120mm		
Cutout (mm)	10*15cm		
Capacity Of Modules	Red(RAL2005), Grey		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.98	49*32*22	0.0345	12

Outline Drawing:

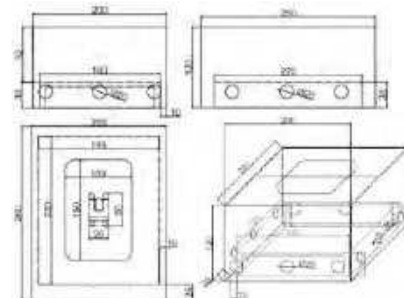


SF-DBMU-01




AS Panel Material	Iron spray paint, Cold plate		
Panel Dimension (mm)	130*130*85mm		
Cutout (mm)	53.5*53.5mm		
Capacity Of Modules	4 way 45*22.5mm modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
27.98	49*32*22	0.0345	12

Outline Drawing:

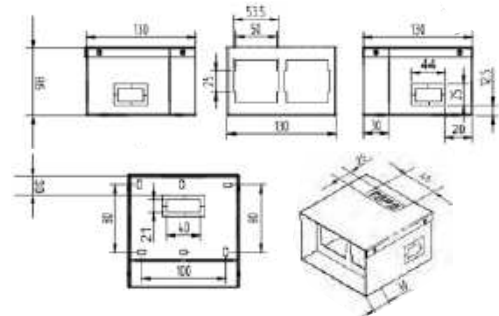

1.OEM&ODM as per your sample or drawing.



Design&production, from "0" to "1"



3D printing



CAD mechanical design



Hand-painted

2.Metal MCB box, glass panel box, fiber optic box and WiFi panel box etc.

LYB6
Metal MCB box



LYX1-02
Glass panel box



LYX2-08
Fiber optic box



LYW- AP101
WiFi panel box



■ 1. Distribution Box

1.1 Distribution Box for Housing with Metal box



P/N	Rows	Specification	Cover dimension(mm)	Box dimension(mm)
LYB1-9	1	9	240x200x105	217x180x85
LYB1-12	1	12	295x200x105	270x180x85
LYB1-16	1	16	366x240x105	340x220x85
LYB1-20	1	20	438x240x105	412x220x85
LYB1-24	2	24	295x400x105	270x380x85
LYB1-32	2	32	295x600x105	270x580x85
LYB1-40	2	40	438x480x105	412x460x85
LYB1-48	3	48	366x720x105	340x700x85
LYB1-60	3	60	438x720x105	412x700x85

1.2 Distribution Box for Housing with Metal box



P/N	Rows	Specification	Cover dimension(mm)	Box dimension(mm)
LYB4-4	1	4	150x170x110	130x150x95
LYB4-6	1	6	193x220x110	173x200x95
LYB4-8	1	8	240x220x110	220x200x95
LYB4-10	1	10	286x240x110	263x220x95
LYB4-12	1	12	320x240x110	300x220x95
LYB4-15	1	15	374x240x110	354x220x95
LYB4-18	1	18	428x240x110	408x220x95
LYB4-20	1	20	464x240x110	444x220x95
LYB4-24	1	24	536x240x110	516x220x95
LYB4-24	2	24	320x480x110	300x460x95
LYB4-30	2	30	374x480x110	354x460x95
LYB4-36	2	36	428x480x110	408x460x95
LYB4-40	2	40	464x480x110	444x460x95
LYB4-45	3	45	374x680x110	354x660x95
LYB4-54	3	54	428x680x110	408x660x95
LYB4-60	3	60	464x680x110	444x660x95

1.3 Distribution Box for Housing with Metal box



P/N	Specification	Cover dimension(mm)	Box dimension(mm)
LYM3-4	4	141x160x90	120x143x75
LYM3-6	6	180x210x90	158.5x192x75
LYM3-9	9	234x210x90	212.5x192x75
LYM3-13	13	306x210x90	283.5x192x75
LYM3-16	16	360x210x90	338.5x192x75
LYM3-20	20	432x210x90	409.5x192x75
LYM3-26	26	306x420x90	283.5x395x75
LYM3-32	32	360x420x90	338.5x395x75
LYM3-40	40	432x420x90	409.5x395x75

1.4 Distribution Box for Housing with Metal box



P/N	Rows	Specification	Cover dimension (mm)	Box dimension (mm)
LYB5-9	1	9	240x200x95	217x180x75
LYB5-12	1	12	295x230x95	270x210x75
LYB5-16	1	16	366x230x95	340x210x75
LYB5-20	1	20	438x230x95	413x210x75
LYB5-24	2	24	295x460x95	270x440x75
LYB5-32	2	32	366x460x95	340x440x75
LYB5-36	3	36	295x690x95	270x670x75
LYB5-40	2	40	438x460x95	413x440x75
LYB5-48	3	48	366x690x95	340x670x75
LYB5-60	3	60	438x690x95	413x670x75

1.5 Distribution Box for Housing with Metal box



P/N	Rows	Specification	Cover dimension(mm)	Box dimension(mm)
LYB6-8	1	9	260x230x110	235x200x85
LYB6-12	1	12	325x225x110	305x220x85
LYB6-16	1	16	400x255x110	375x220x85
LYB6-20	1	20	470x255x110	450x220x85
LYB6-24	2	24	318x384x110	290x355x85
LYB6-32	2	32	400x520x110	375x485x85
LYB6-40	2	40	470x520x110	450x485x85
LYB6-48	3	48	400x785x110	375x750x85
LYB6-60	3	60	470x785x110	450x750x85

1.6 Distribution Box for Housing with Metal box




P/N	Rows	Specification	Cover dimension(mm)	Box dimension(mm)
LYB8-8	1	8	236x240x105	206x220x95
LYB8-10	1	10	284x240x105	254x220x95
LYB8-12	1	12	320x240x105	290x220x95
LYB8-16	1	16	392x240x105	362x220x95
LYB8-20	1	20	464x240x105	434x220x95
LYB8-24	2	24	320x390x105	290x360x95
LYB8-32	2	32	392x390x105	362x360x95
LYB8-40	2	40	464x390x105	434x360x95
LYB8-48	3	48	392x566x105	362x536x95
LYB8-60	3	60	464x566x105	434x536x95

1.7 Distribution Box for Housing with Metal box



P/N	Specification	Cover dimension (mm)	Box dimension (mm)
LYB9-16	1 16	366x240x105	340x220x85
LYB9-20	1 20	438x240x105	412x220x85
LYB9-32	2 32	295x600x105	270x580x85
LYB9-40	2 40	438x480x105	412x460x85
LYB9-48	3 48	366x720x105	340x700x85
LYB9-60	3 60	438x720x105	412x700x85

1.8 Distribution Box for Housing with Metal box



P/N	Specification	Cover dimension(mm)	Box dimension(mm)
LYM1-12	12	294x210x95	268x190x75
LYM1-16	16	366x210x95	340x190x75
LYM1-20	20	438x210x95	412x190x75
LYM1-24	24	268x315x95	268x315x75
LYM1-32	32	366x420x95	340x360x75
LYM1-40	40	438x420x95	412x360x75
LYM1-48	48	366x630x95	340x550x75
LYM1-60	60	438x630x95	412x550x75
LYM1-16D	16	366x230x95	340x210x75
LYM1-20D	20	438x230x95	412x210x75

1.9 Intelligent Household Multimedia Information Box



P/N	Specification	Cover dimension(mm)	Box dimension(mm)
LYM5-10	10	267x228x100	247x210x85
LYM5-12	12	305x228x100	285x210x85
LYM5-15	15	359x250x100	339x230x85
LYM5-18	18	412x250x100	392x230x85
LYM5-21	21	467x250x100	447x230x85
LYM5-24-1	24	521x250x100	501x230x85
LYM5-24-2	24	305x399x100	285x370x85
LYM5-30	30	359x429x100	339x400x85
LYM5-36	36	412x429x100	392x400x85

1.10 Glass panel Intelligent Household Multimedia Information Box




P/N	Cover dimension(mm)	Box dimension(mm)
LYX1-02C	270x320x100	300x350x120
LYX1-02D	270x370x100	300x400x120
LYX1-02E	270x420x100	300x450x120
LYX1-02F	270x470x100	300x500x120
LYX1-02G	270x470x100	300x500x120

1.11 Intelligent Household Multimedia Information Box



P/N	Cover dimension(mm)	Box dimension(mm)
LYX1-03A	300x200x100	330x230x120
LYX1-03AX	300x200x100	330x230x120

1.12 Fiber Optic Multimedia Information Box



P/N	Cover dimension(mm)	Box dimension(mm)
LYX1-08A	300x250x120	330x280x140
LYX1-08C	300x350x120	330x380x140
LYX1-08D	300x400x120	330x430x140

1.13 Fiber Optic Multimedia Information Box



P/N	Cover dimension(mm)	Box dimension(mm)
LYX2-08A	330x280x140	300x250x120
LYX2-08C	380x330x140	350x300x120
LYX2-08D	430x330x140	400x300x120
LYX2-08E	480x330x140	450x300x120
LYX2-08F	530x330x140	500x300x120
LYX2-08S	330x430x140	300x400x120

1.14 Fiber Optic Multimedia Information Box



P/N	Cover dimension(mm)	Box dimension(mm)
LYX-09D	330x430x140	300x400x120

1.15 PANEL WIFI



LYW-AP101
PANEL WIFI

Product configuration and functions

Embedded in traditional wall switch 86 cassette;
11N wireless technology, 300Mbps wireless rate;
Easy installation, no configuration, installation more beautiful and simple;
Good compatibility with smart phones, tablets, laptops, netbooks, etc;
Support AP wireless access point Repeater (wireless terminal), Router (wireless routing), Bridge (wireless bridge) and other working modes to provide LAN/WAN wired socket;
Non-standard POE power supply.



LYW-AP111
PANEL WIFI


Embedded in traditional wall switch 86 cassette;
11N wireless technology, 300Mbps wireless rate;
Easy installation, no configuration, installation more beautiful and simple;
Good compatibility with smart phones, tablets, laptops, netbooks, etc;
Support AP wireless access point Repeater (wireless terminal), Router (wireless routing), Bridge (wireless bridge) and other working modes to provide LAN/WAN wired socket;
High voltage power supply.

1.16 Fibre Optical Module

P/N		P/N	
LYX-B301 POE routing module		LYX-B302 POE routing module	
LYX-B307 POE switch module		LYX-B307 POE switch module	

1.16 Fibre Optical Module

P/N		P/N	
LYX-A301 Communication module		LYX-A304 Communication module	
LYX-B305 Data module		LYX-C301 Cable TV signal module	
LYX-C302 Cable TV signal module		LYX-C303 TV and telephone integrated module	
LYX-E301 Switching power module		LYX-G301 Fill module	
LYX-G302 Fill module			

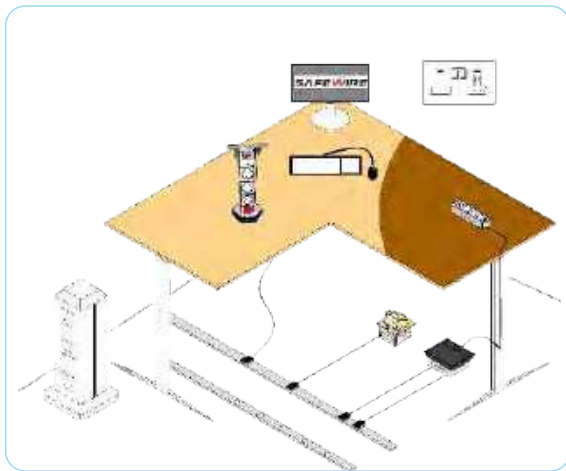

SOB Features


1. 3/4/6/8 ways 45*45mm modules inside.

2. Silver/Black/Brass/White/Nickel etc. colour.




3. More International Socket, multimedia and Data accessories: BS/EU/UL/Universal/SAA Standard.

1. 45*45mm Modules



2. 128 Type series




- 3 ways/4 ways/6 ways/8 ways module socket to be installed.
- Stainless Steel Color/Black Color/ Aluminum Alloy Color/Copper Color /White Color
- 45/128 type module socket.




Advantage of Safewire floorbox

1.Color Sample(Remark:or refer to RAL or Pantone):

							
Br:Brass H62	P:stainless 304	L:aluminum alloy	Ch:chrome	NK:nickel	Zl:zinc	Pb:powder peel black	BZ:bronze

2.Easy-Installation & Fast-wiring

1. Easy-Installation

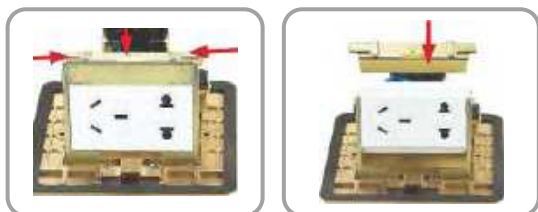

2. Fast-Wiring



3.Reliable Quality Certificated by TUV , Germany



Weight:298g

E-mail:happyto@safewirele.com
Web:www.safewirele.com



Thickness:1.35mm

E-mail: happyto@safewirele.com
Web:www.safewirele.com



E-mail:happyto@safewirele.com
Web:www.safewirele.com



Safewire floorbox Application in different floor system




SOB: Serviced Outlet Box

FD201/201L



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	120*120		
Cutout (mm)	103*103		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
14.15	43*27*26.5	0.0308	20

Outline Drawing:

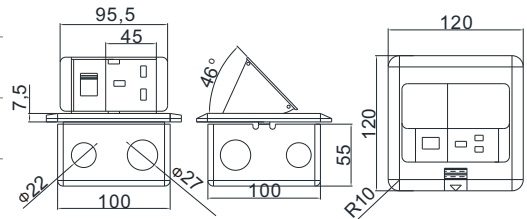


FD-221



AS Panel Material	Brass alloy		
Panel Dimension (mm)	120*120		
Cutout (mm)	103*103		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
18	41.5*27*27	0.0303	20

Outline Drawing:

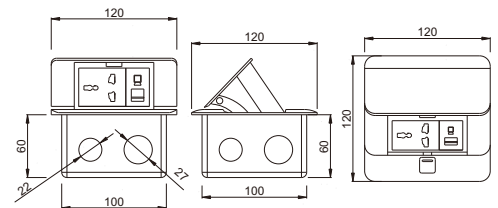


HTD-1/1L



AS Panel Material	Brass alloy		
Panel Dimension (mm)	120*120		
Cutout (mm)	103*103		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22.5	41.5*27*27	0.0303	15

Outline Drawing:

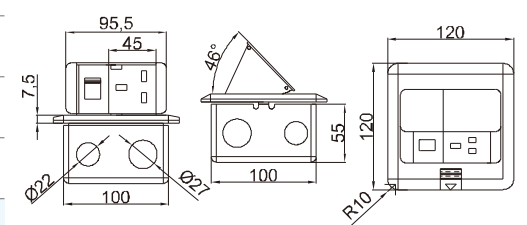


HTD-J02L



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	120*120		
Cutout (mm)	103x103		
Capacity Of Modules	GFCI module with USB port		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22.5	41.5*27*27	0.0303	15

Outline Drawing:

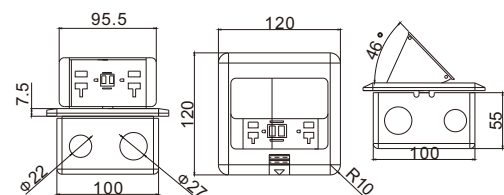


HTD-J02N



AS Panel Material	Bevelled square brass/Nickel chrome		
Panel Dimension (mm)	120*120		
Cutout (mm)	103x103		
Capacity Of Modules	4 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22.3	44*28*27.3	0.0336	20

Outline Drawing:

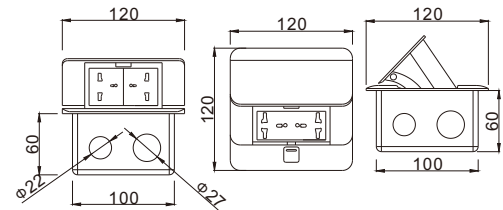


HTD-2/2P



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	120*120		
Cutout (mm)	105x105		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
22.3	44*28*27.3	0.0336	20

Outline Drawing:

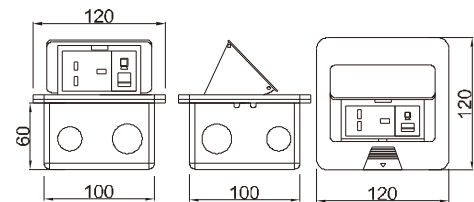


HTD-3/3P



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	Ø150		
Cutout (mm)	105*105		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
115	41.5*32.5*32.5	0.0438	20

Outline Drawing:

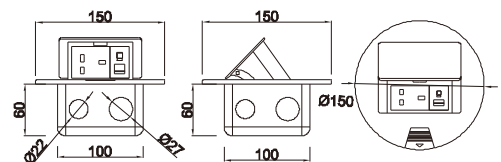


HTD-7/7L



AS Panel Material	Brass alloy/Stainless alloy		
Panel Dimension (mm)	Ø150		
Cutout (mm)	103*103		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	41.5*32.5*32.5	0.0438	20

Outline Drawing:

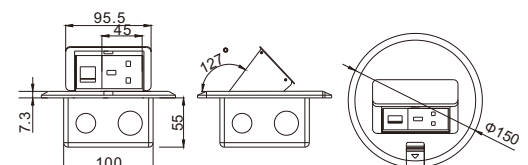


HTD-18/18L



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	128*120		
Cutout (mm)	103*103		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16.8	41.5*27*27	0.0303	20

Outline Drawing:

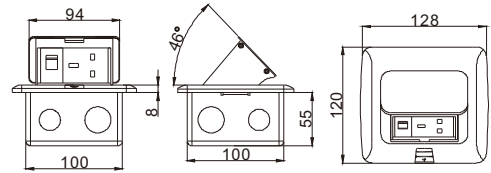


HTD-331L



AS Panel Material	Aluminum alloy		
Panel Dimension (mm)	154*146		
Cutout (mm)	123*123		
Capacity Of Modules	4 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
15	49*32*22	0.0345	12

Outline Drawing:

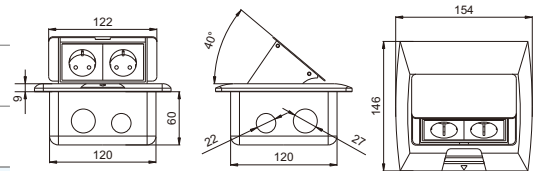


HTD-28/28L



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	154*146		
Cutout (mm)	123*123		
Capacity Of Modules	4 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
15	49*32*22	0.0345	12

Outline Drawing:

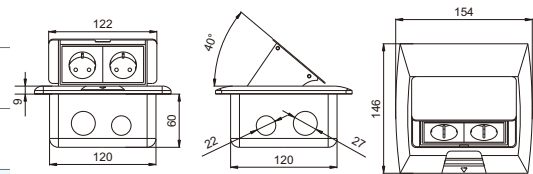


HTD-381L



AS Panel Material	Aluminum alloy		
Panel Dimension (mm)	154*146		
Cutout (mm)	123*123		
Capacity Of Modules	4 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
15	49*32*22	0.0345	12

Outline Drawing:

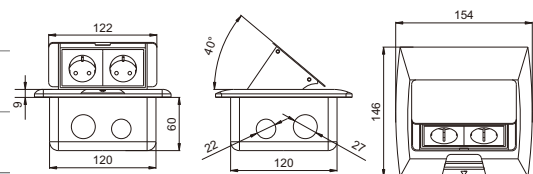


HTD-1602/1602L



AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	220*120		
Cutout (mm)	202x107		
Capacity Of Modules	6 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
17.6	44*24*27	0.0285	10


Outline Drawing:

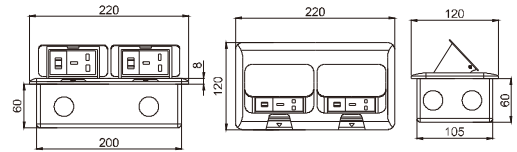

HTD-2602/2602L/W/B

AS Panel Material	Brass alloy/Alu alloy		
Panel Dimension (mm)	270*147		
Cutout (mm)	253*108		
Capacity Of Modules	8 ways 45 type modules		
Color	silver / golden / white / black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
96.5	45*28.5*31.5	0.0404	10

Outline Drawing:





HTD-3602/3602L/W/B






AS Panel Material	Alu alloy		
Panel Dimension (mm)	272*120		
Cutout (mm)	252*100		
Capacity Of Modules	8 ways 45 type modules		
Color	Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
96.5	45*28.5*31.5	0.0404	10

Outline Drawing:



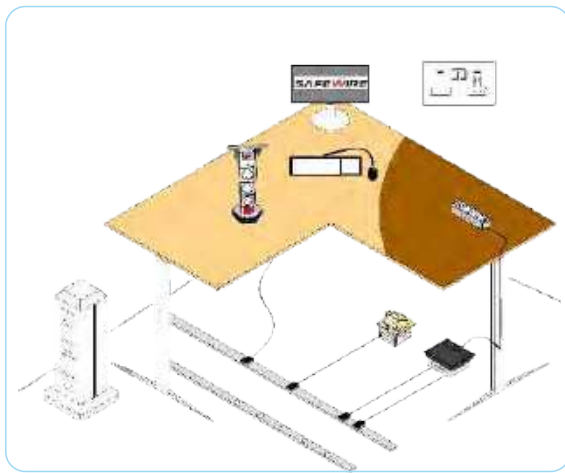

Installation



FUS Series Features

1. More capacity : 6*power socket outlet.




2. Silver/Black/Brass/White/Nickel etc . color



3. More International Socket , multimedia and Data accessories: BS/EU/UL/Universal/ISA Standard.


1.45*45mm Modules

45



2.128 Type series

128



Advantage of Safewire floorbox

1. Over 20 years production experience for global brand:



2. Reliable Quality Certificated by TUV , Germany



Safewire floorbox IP level certificated




FUS: Flip Up socket

HTD-101/101P



AS Panel Material	Brass alloy/Stainless-Steel		
Panel Dimension (mm)	86*101		
Cutout (mm)	78*80		
Capacity Of Modules	2 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
24	55*34*24	0.0449	50


Outline Drawing:

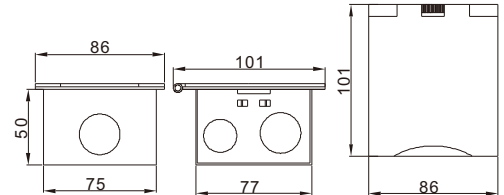

HTD-102/102P

AS Panel Material	Brass alloy/Stainless-Steel		
Panel Dimension (mm)	147*102		
Cutout (mm)	138x80		
Capacity Of Modules	4 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
23.2	36*33.5*35	0.0422	25

Outline Drawing:

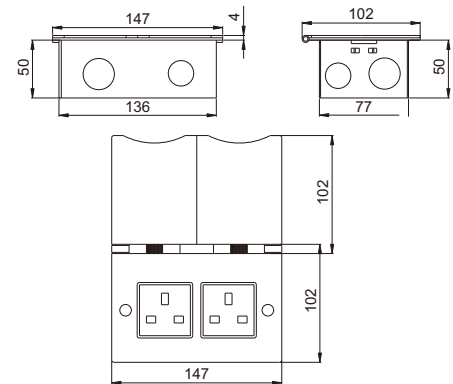


HTD-103C/103W



AS Panel Material	Zinc alloy		
Panel Dimension (mm)	90*90		
Cutout (mm)	77*80		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
14.2	55*34*24	0.0449	50

Outline Drawing:

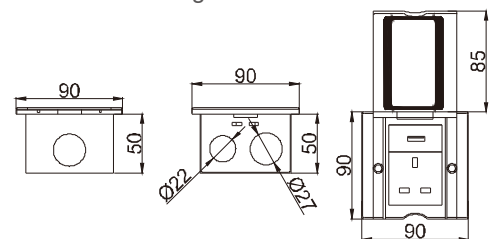


HTD-11/11P



AS Panel Material	Brass alloy/Stainless steel		
Panel Dimension (mm)	120*120		
Cutout (mm)	68*68		
Capacity Of Modules	3 ways 45 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
14.25	32*29*32	0.0297	12

Outline Drawing:




HTD-12



AS Panel Material	Round shape Brass H62/stainless 304		
Panel Dimension (mm)	φ135mm		
Cutout (mm)	105*105		
Capacity Of Modules	3 ways 45 type socket or 1*128 type socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
115	41.5*32.5*32.5	0.0438	20

Outline Drawing:




FD-777-A/AP



AS Panel Material	Brass alloy		
Panel Dimension (mm)	143*136		
Cutout (mm)	122*122		
Capacity Of Modules	4 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
40	52*35*24	0.0437	16

Outline Drawing:

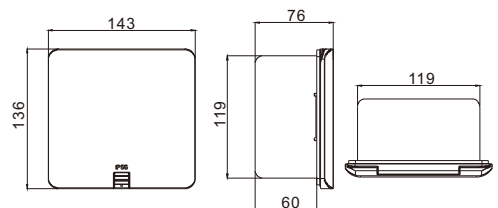



FD-777-B/BP



AS Panel Material	Brass alloy & nickel plated brass		
Panel Dimension (mm)	143*136		
Cutout (mm)	122*122		
Capacity Of Modules	3 ways 128 type modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
14.25	32*29*32	0.0297	12


Outline Drawing:

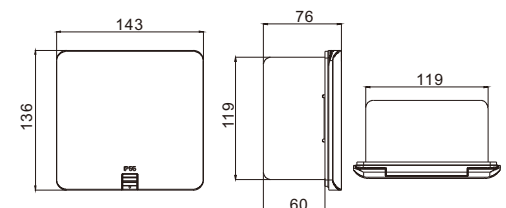

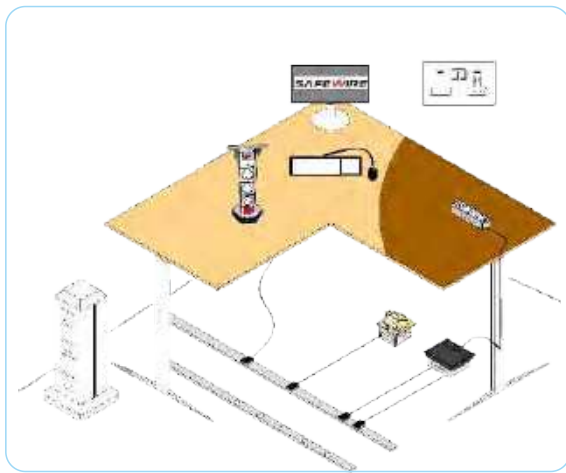

MCS Series Features


1.Easy plug in/out:

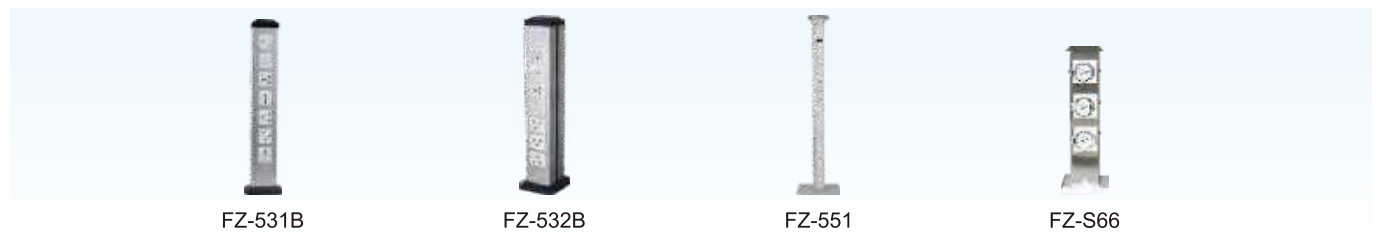

2.More power socket &Data:



3.ODM Design for height & Input

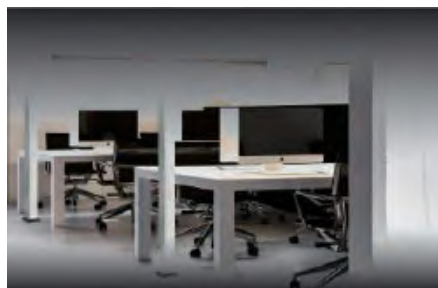

Advantage

1.IP44&IP66 IP Level:





2.Supply with Wire&Input cable



3. Customization design such as base, cover & outlet:



Safewire's Mini-column Application in different system

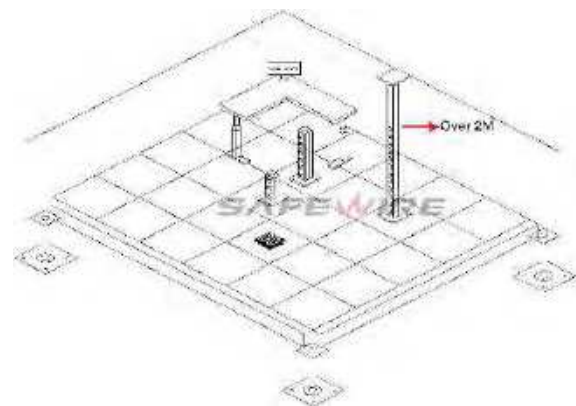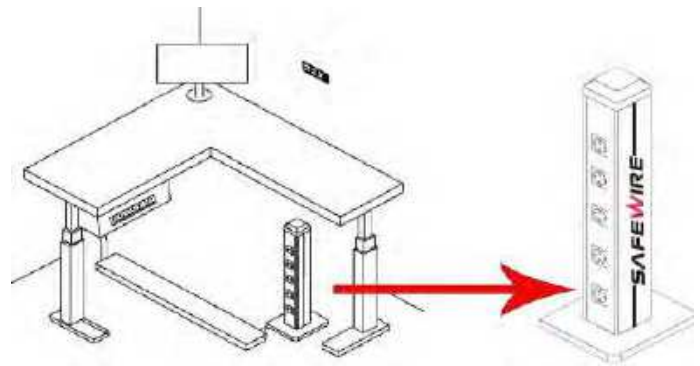


MCS: Mini-Columns Socket & utility column

FZ-531A



Material	Aluminum alloy		
Height Of Product(mm)	350		
Power Supply Side	Single side		
Capacity Of Modules	8 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.3	53.5*37*34.5	0.068	6

Outline Drawing:

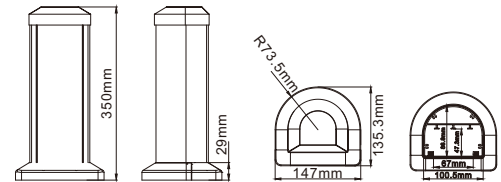


FZ-532A



Material	Aluminum alloy		
Height Of Product(mm)	350		
Power Supply Side	Dual side		
Capacity Of Modules	16 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	53.5*37*34.5	0.068	6

Outline Drawing:

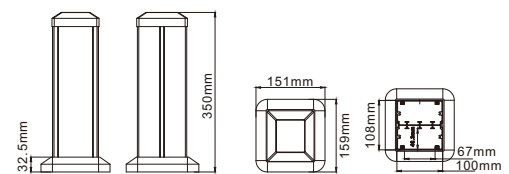


FZ-531B



Material	Aluminum alloy		
Height Of Product(mm)	660		
Power Supply Side	Single		
Capacity Of Modules	14 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	52*34.5*68.5	0.123	12

Outline Drawing:

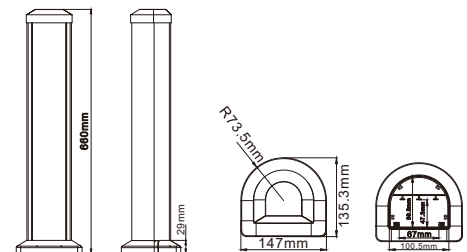


FZ-532B



Material	Aluminum alloy		
Height Of Product(mm)	660		
Power Supply Side	Dual side		
Capacity Of Modules	28 ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	52*34.5*68.5	0.123	12

Outline Drawing:

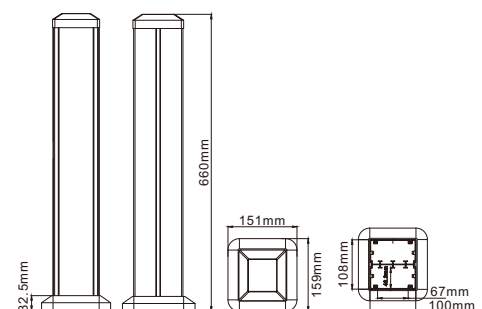




FZ-551

Material	Aluminum alloy		
Height Of Product(mm)	1007		
Bottom Base Size(mm)	240*240		
Capacity Of Modules	20ways 45 modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	52*34.5*68.5	0.123	12


Outline Drawing:

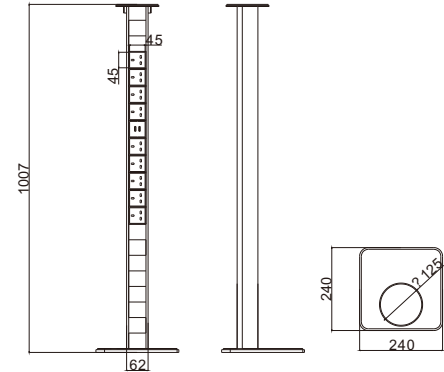

FZ-S66

Material	Stainless steel 304		
Ip Protection Level	IP66		
Power Supply Side	Two side		
Capacity Of Modules	5 IP66 Waterproof case		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
60.5	22*24*67	0.035	1


Outline Drawing:

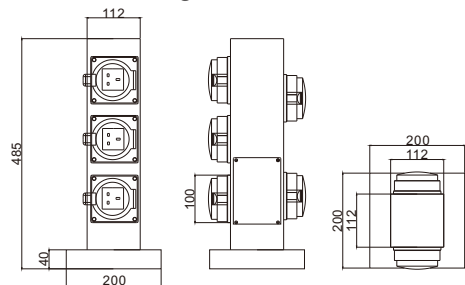

FZ-A66

Material	Stainless steel 304		
Ip Protection Level	IP66		
Power Supply Side	Two side		
Capacity Of Modules	5 IP66 Waterproof case		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
60.5	22*24*67	0.035	1


Outline Drawing:

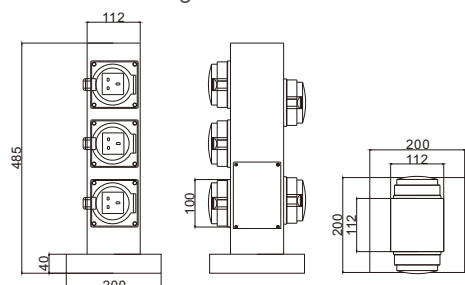


Desktop socket / PDU socket / wireless charger




FZ-517




FZ-521

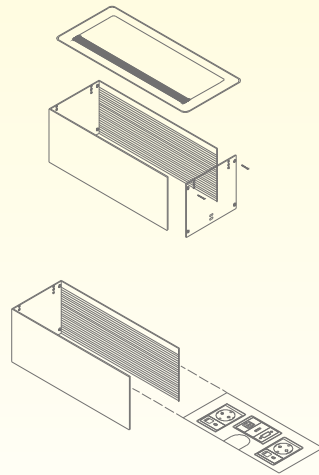


FZ-527

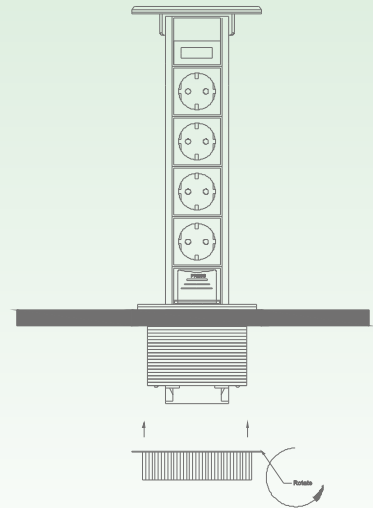


FZ-508

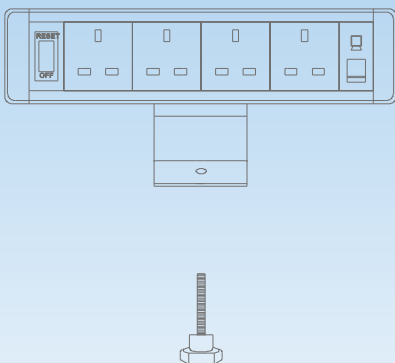

FZ-507




FZ-561





Features

1. Charging distance over : 10-20mm, more complete wood, glass, porcelain, rock surface while charging.

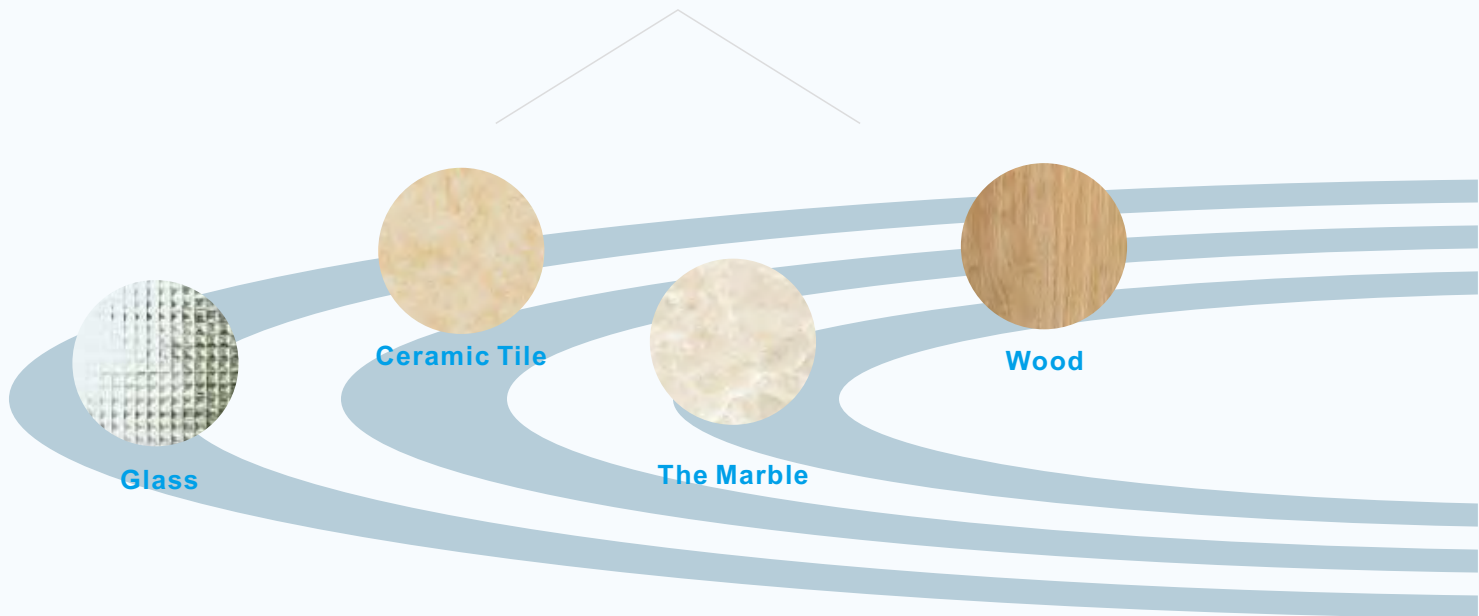

2. Multiple scenarios are applicable



Advantage

1. PD18W, QC3.0, 5W/7.5W/10W/15W Qi I-coilfast wireless charger



2. Teeth around and lock mechanism, more stable & Convenient Installation.

3. Supply with Input USB Cable and accessories.



Specification

1. Overcurrent protection, over voltage protection Temperature control, smart clip, safety protection for you device.





Safewire Maedia Control Box: SFU-Box-S1

Product Feature Description

Intel Gemini Lake-R J4125 Embedded

1* RJ45, GigaLAN, 2* USB3.0

DC 12, 2A

8 + 128GB (Option)

1* HDMI, 1* micro SD

Dimensions: 62x62x45 mm



Safewire Media Control Box: FT-HP-D15

Lighting power	12W (60*0.2W LED module)
Adapter voltage/current	DC 24V/1.5A
USB Output 1	QC 3.0 (12V 1.5A,9V 2A,5V 3A)
USB Output 2	DC 5V 1A
TYPE C output	PD 3.0 (12V 1.5A,9V 2A,5V 3A)
Wireless charging output	15 W / 10 W / 7.5 W / 5 W
Wireless charging conversion efficiency	75% or higher
Product material	ABS plastic + aluminum alloy
Luminous flux	Max 690lm
Color temperature	3000-6500k
Color rendering index	> 90 Ra
Bead service life	50,000 hours
Net/gross weight of product	583g/795g
Color box size	130*54*435mm
Packing number/outer box size/gross weight	20pcs /55.5*27.7*45CM/17KG
Implementation standard	GB 7000.1-2015




WCD: Wireless Charger Desktop

FT-09W



Output	5V/1A 9V/1.1A		
Voltage	110-240V		
Input	5V 2A (two port)		
Materials	ABS		
Charging Distance	8mm		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:




FT-10W



Output	5V/1A 9V/1.1A		
Voltage	110-240V		
Input	5V2A 9V1.67A		
Charging Distance	2-25mm		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5	36.4*28*18	0.018	18

Outline Drawing:

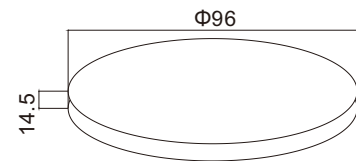


FT-12W



Output	5V/1A 9V/1.1A		
Voltage	110-240V		
Input	5V2A 9V1.67A		
USB port	5V/2A(two port)		
Charging Distance	8mm		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5.5	43.5*24.5*27.5	0.029	50

Outline Drawing:




FMF-18W



Output	5V/1A 9V/1.1A		
PD output	18W		
Voltage	110-240V		
Input	5V2A		
Describe	Mobile phone support + Wireless charging + two port USB		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.5	47*39*20	0.037	30

Outline Drawing:




FT-06W



Output Rate	15W		
Input	Type C USB charger+DC input		
Panel Dimension(mm)	Ø75mm		
Color	white or black or OEM		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5.5	43.5*24.5*27.5	0.029	50

Outline Drawing:

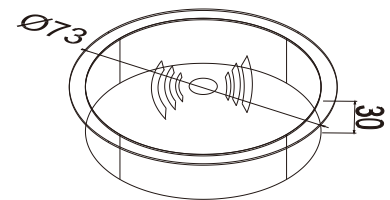


FT-07W



Output	5V/1A 9V/1.1A		
Voltage	110-240V		
Input	5V2A		
Product Size	Ø74 * 18mm		
Charging Distance	8mm		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5	36.4*28*18	0.018	18

Outline Drawing:




FT-08W



Output	5V/1A 9V/1.1A		
Voltage	110-240V		
Input	5V2A		
Product size	Ø70* 24.5mm		
Charging Distance	8mm		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5.5	43.5*24.5*27.5	0.029	50

Outline Drawing:




FV-10W



Output	5V/1A 9V/1.1A		
Voltage	110-240V		
Input	5V1A		
Charging Distance	8mm		
Describe	This is antivirus box with wireless charging. Disinfection of power is 5W, The time for disinfection can be 2 minutes or 5 minutes.		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5	36.4*28*18	0.018	18

Outline Drawing:




FN-19W



Output rate	15W		
Voltage	110-240V		
Input	5V2A		
Describe	Support Iphone, Apple Watch1, watch2, watch3, watch4, watch5, ect		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5	36.4*28*18	0.018	18

Outline Drawing:

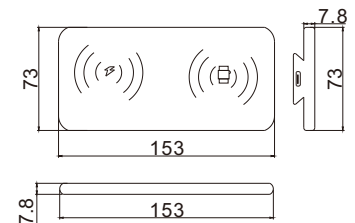


FN-20W



Output rate	18W		
Voltage	110-240V		
Input	space aluminum		
Describe	Support Iphone, Apple Watch1, watch2, watch3, watch4, watch5, ect		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
5	36.4*28*18	0.018	18

Outline Drawing:

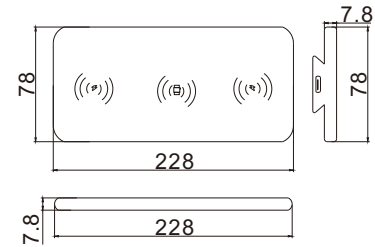


FZ-521B-WF



Wattage	Aluminum alloy		
Panel Dimension (mm)	340*130		
Cutout (mm)	328*116		
Capacity Of Modules	8 ways 45*45mm modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	52*34.5*68.5	0.123	12

Outline Drawing:

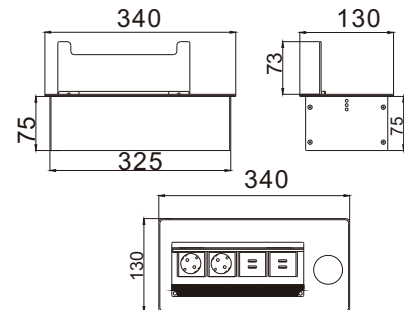


FZ-521S-WF



Wattage	Aluminum alloy		
Panel Dimension (mm)	340*130		
Cutout (mm)	328*116		
Capacity Of Modules	8 ways 45*45mm modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.5	53.5*37*34.5	0.068	6


Outline Drawing:

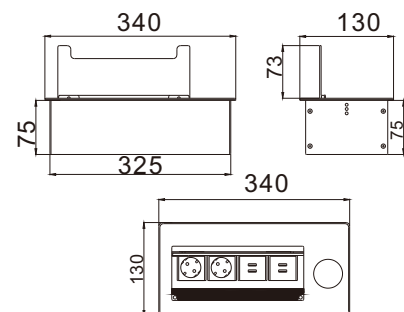

IP44 Level protector shutter socket



45 degree socket, more easy plug into unites.

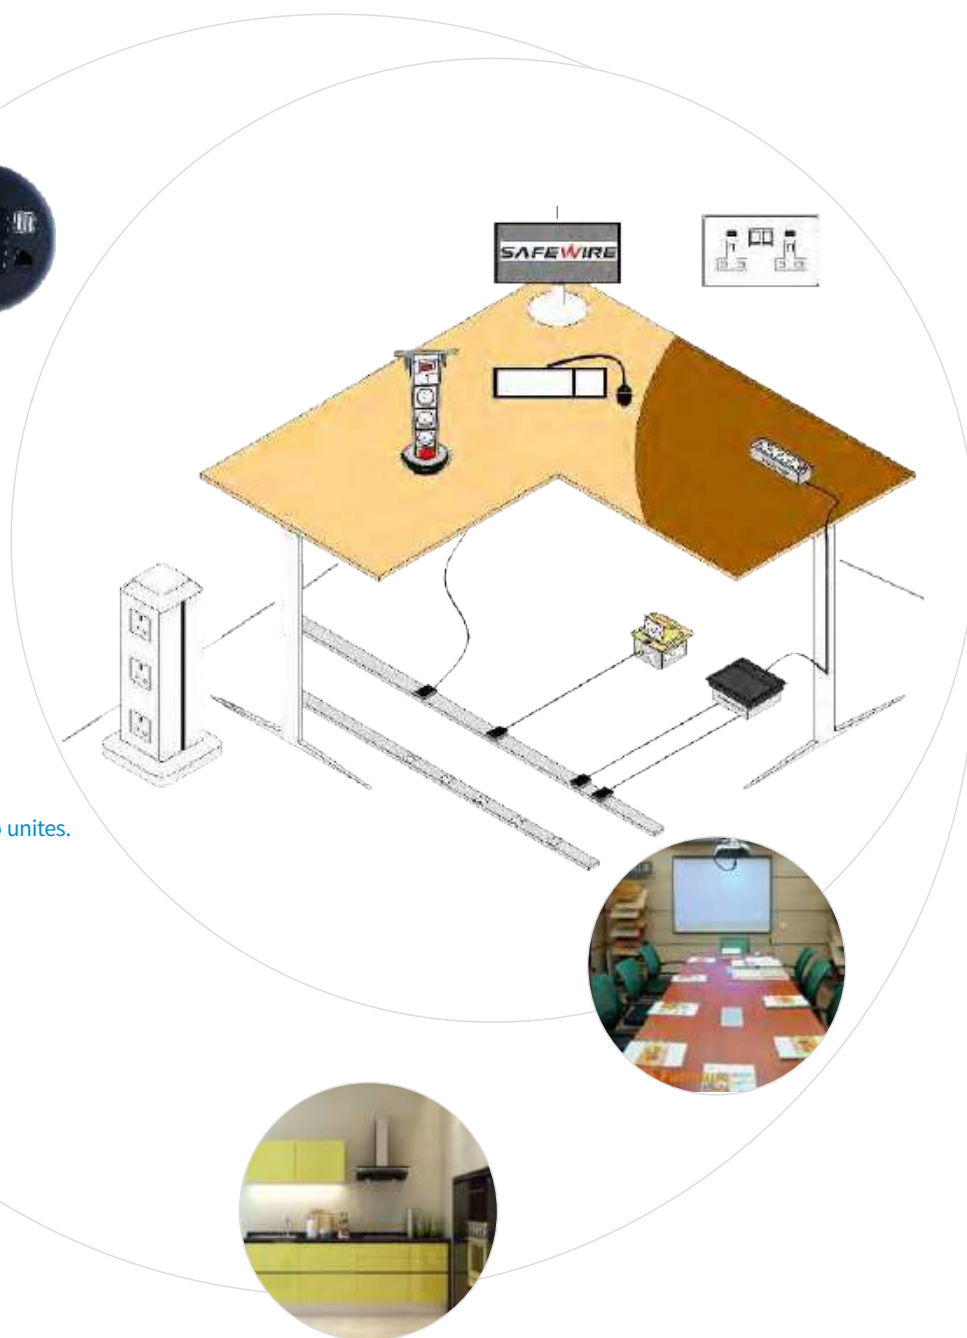

Optional motorised pop up with bluetooth/USB and wireless charge etc.



FZ-VL-001



FZ-527E/W



FZ-527E/U



1.Safewire Cylindrical socket application in different system:



FZ-VL-001



FZ-527E/W



FZ-526-8



FZ-502W



FZ-502B



SFGS811-WL

2. Anodised EV1 Aluminum Brushing wire drawing or black powder-coated housing.



FZ-VL-001




FZ-527E/U



FZ-527B



More optional $\phi 80\text{mm}$, $\phi 100$, $\phi 124\text{mm}$ for grommet hole in furniture.

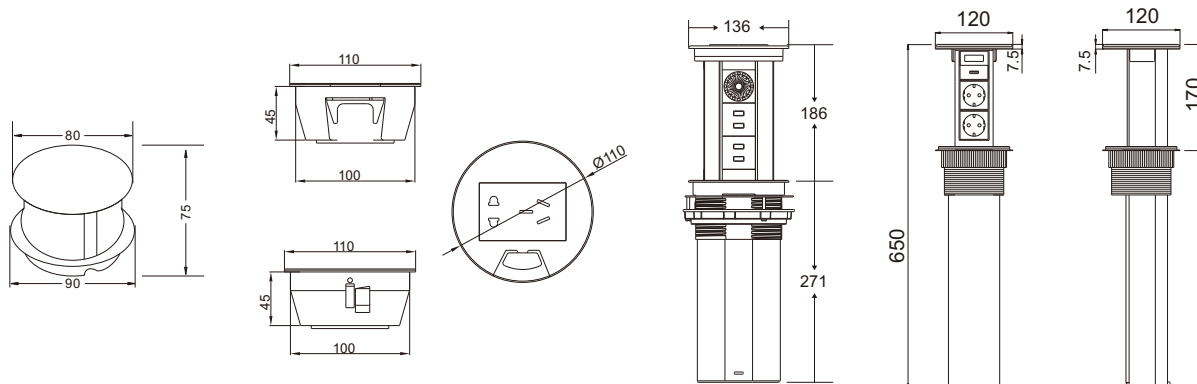


VLD: Vertical Liftable Desktop

FZ-VL-001



Panel Material	Aluminum 6063, PC zinc alloy		
Surface finish/side	Silver/black/four sides		
Capacity of modules	16 ways 45*45mm modules		
Describe	wireless charger & USB motorised pop up with USB/bluetooth/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:

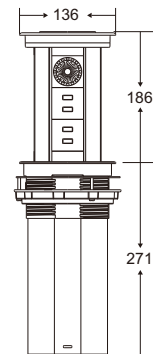


FZ-VL-002



Panel Material	Aluminum 6063, PC zinc alloy		
Surface finish/side	Silver/black/dauble sides		
Capacity of modules	16 ways 45*45mm modules		
Describe	wireless charger & USB motorised pop up with USB/bluetooth/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:

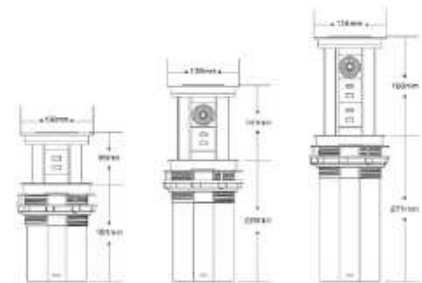


FZ-527E/W



Material	Aluminum 6063, PC zinc alloy		
Optional color	silver/black		
Capacity of modules	8 ways 45*45mm modules		
Describe	wireless charger & USB motorised pop up with USB/bluetooth/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:




FZ-527E/U



Material	Aluminum 6063, PC zinc alloy		
Optional color	silver/black		
Capacity of modules	8 ways 45*45mm modules		
Describe	Motorised pop up with USB/bluetooth/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:




FZ-527B



Panel Material	Stainless		
Surface finish	Painted/Oxygenated		
Capacity of modules	8 ways 45*45mm modules		
Describe	Cylindrical engineer popup with USB/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:




FZ-527



Panel Material	Stainless		
Surface finish	Painted/Oxygenated		
Capacity of modules	8 ways 45*45mm modules		
Describe	Pneumatic pop up with USB/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:




FZ-520



Panel Material	Zinc Alloy/Steel		
Surface finish	Painted/Oxygenated		
Capacity of modules	4~10 ways 45*45mm modules		
Describe	Cylindrical liftable pop up with USB/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:

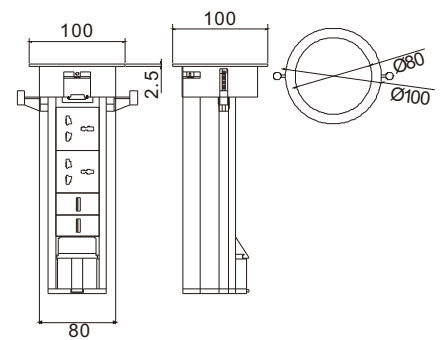


FZ-526-8



Panel Material	Aluminum 6063, PC zinc alloy		
Surface finish	Painted/Oxygenated		
Capacity of modules	8 ways 45*45mm modules		
Describe	Cylindrical pop up with USB/outlets		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.4	47*42*27.5	0.054	6

Outline Drawing:

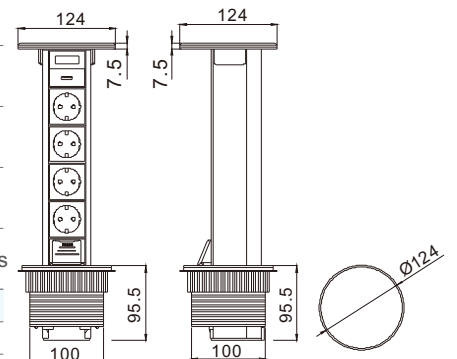



In accordance with
IEC60884/EN60670 Standard

RoHS





Black



White



Silver



Gold



Graphite



Nickel



6 ways ,4 ways,45*45mm power Socket & Data



F2



F4



F11



F15



F18



F59



F65A



F21/F23



F55



F50



F51



F52

Bridge empty enclosure or complete socket with plug cable.



IP44, Aluminum alloy plate + UL94 PC fire retardant box , More higher insulation, more safety.



45mm snap-in socket+ 2 bridge support + screw fixing box, Easy Installation & replacement save labor cost.



45 degree/180 degree plug with socket + IP44 pop up 45mm socket with shutter, more best plug.

45 degree

180 degree



IP44 pop up 45mm socket with shutter


PUD:Pop Up Desktop



FZ-517B

Panel Material	Aluminum alloy		
Panel Dimension (mm)	240*120		
Cutout (mm)	231*12		
Capacity Of Modules	6 ways 45*45mm modules		
Color	Black RAL9005		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
15.4	48*31*42	0.062	12


Outline Drawing:



FZ-517-DN B/W/S

Panel Material	Aluminum alloy		
Panel Dimension (mm)	266*118		
Cutout (mm)	231*112		
Capacity Of Modules	6 ways 45*45mm modules		
Color	Black / White / Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
9.95	44.5*28.5*27	0.034	9

Outline Drawing:




FZ-515B



Panel Material	Aluminum alloy		
Panel Dimension (mm)	170*123		
Cutout (mm)	148*115		
Capacity Of Modules	4 ways 45*45mm modules		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
8.76	49*42.7*27	0.056	12

Outline Drawing:

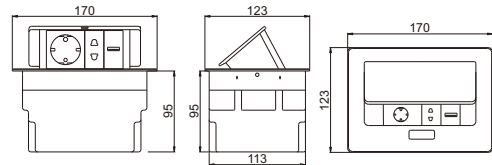


FZ-515S



Panel Material	Aluminum alloy		
Panel Dimension (mm)	170*123		
Cutout (mm)	148*115		
Capacity Of Modules	4 ways 45*45mm modules		
Color	Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
8.76	49*42.7*27	0.056	12

Outline Drawing:

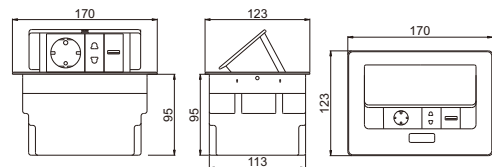


FZ-515W



Panel Material	Aluminum alloy		
Panel Dimension (mm)	170*123		
Cutout (mm)	148*115		
Capacity Of Modules	4 ways 45*45mm modules		
Color	White		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
8.76	49*42.7*27	0.056	12

Outline Drawing:

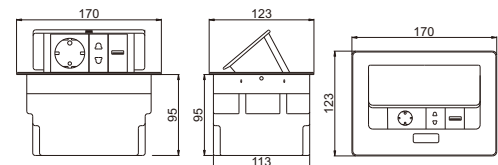



Modular design for Configuration of power supply and communication, 45*45mm modular, 86 type switch and International Brand data etc.



F2



F4



F11



F15



F18



F59



F65A



F21/F23



F55



F50



F51



F52





FZ-TB-B



FZ-TB-A



FZ-TB-W

Fixed or Free-standing Installation.




Clamped Installation



Free-standing

Configuration and dimension can be customization.

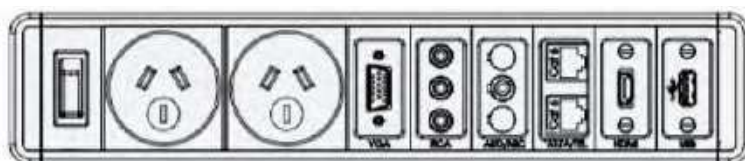


CMD: Clamped Mounted Desktop

FZ-TB-W



Panel Material	Aluminum alloy/PC			
Panel Dimension (mm)	200*63			
Cutout (mm)	170*33			
Capacity Of Modules	6/8/10 ways 50*50mm black /45*45mm white modules			
Color	White			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
12.15	56*31*31	0.054	10	

Outline Drawing:




FZ-TB-B (black)



Panel Material	Powder-Coated Aluminum housing			
Panel Dimension (mm)	200*63			
Cutout (mm)	170*33			
Capacity Of Modules	50*50mm black modules /45*45mm white modules			
Color	Black			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
12.15	56*31*31	0.054	10	

Outline Drawing:




FZ-TB-A



Panel Material	Aluminum alloy/PC			
Panel Dimension (mm)	318.5*81.5			
Cutout (mm)	170*33			
Capacity Of Modules	50*50mm black modules /45*45mm white modules			
Color	Silver / Black			
Describe	Flush-mounting with power cable			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
17.6	52*41*39	0.083	12	

Outline Drawing:

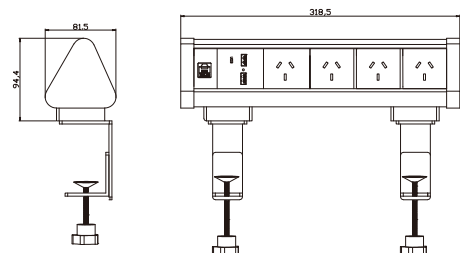




FA-1770-D/U

Panel Material	Fire-retardant ABS plastic		
Panel Dimension (mm)	86.4*115*85		
Cutout (mm)	70*100*70		
Capacity Of Modules	2 ways (45*45mm)modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
12. 15	56*31*31	0. 054	10


Outline Drawing:

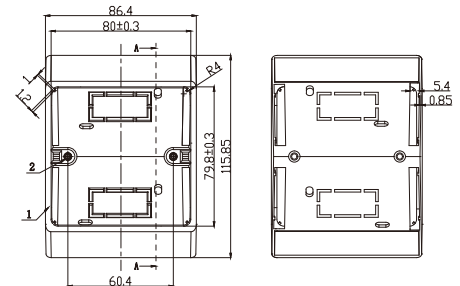

FA-2770

Panel Material	Fire-retardant ABS plastic		
Panel Dimension (mm)	146.4*115*85		
Cutout (mm)	120*95*65		
Capacity Of Modules	4 ways (45*45mm)modules		
Capacity of modules	4 ways (45*45mm) modules & 146*86 type socket		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
12. 15	56*31*31	0. 054	10

Outline Drawing:

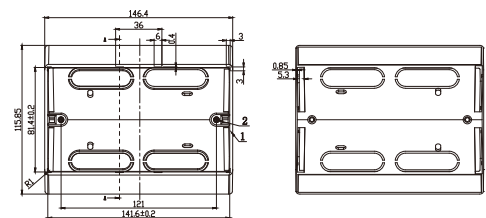

Wall Mounted Socket Series

More Protection

Polish material protect from oil and water



Say No



Oil



Water



304 Stainless / Chrome surface finish , more performance anti-corrosion & anti-oil



SFGLC-1






SFGLC86-1



SFGLC86-2



SFGLC86-3



More optional color like Silver/Black/White/Graphite etc.



Black



White



Silver



Gold





Graphite



Nicket

1.Safewire's Counter top socket Application in different system

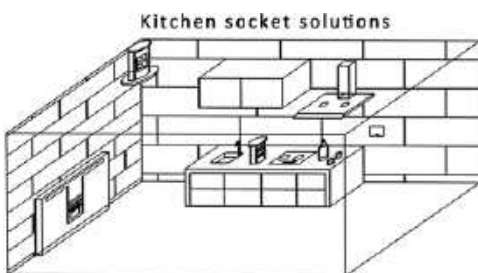


CAP: Corner Aluminum Profile

SFGLC-2



Panel material	Aluminum alloy		
Feature	Usually used in the kitchen, hotel and so on		
Capacity of modules	4 ways (45*45mm)modules		
Color surface	Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ²)	Set/CTN
12. 15	56*31*31	0. 054	10

Outline Drawing:

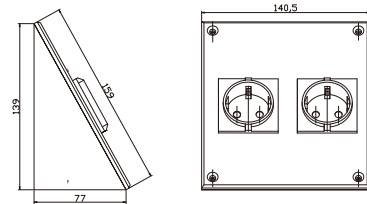


SFGLC-3



Panel material	Aluminum alloy		
Feature	Usually used in the kitchen, hotel and so on		
Capacity of modules	6 ways (45*45mm)modules		
Color surface	Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ²)	Set/CTN
12. 15	56*31*31	0. 054	10

Outline Drawing:





FZ-508



Panel Material	ABS		
Panel Dimension (mm)	320*67*68		
Cutout (mm)	300*50*50		
Capacity Of Modules	Max.8ways 45*45mm modules		
Color surface	Black/Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ²)	Set/CTN
12. 15	56*31*31	0. 054	10

Outline Drawing:

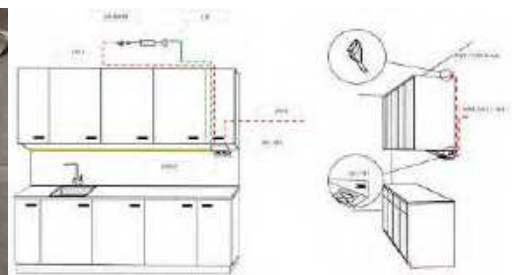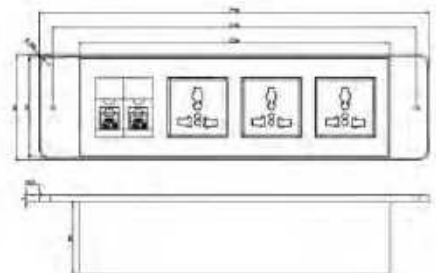


SFGLC-1



Panel Material	Stainless Steel		
Panel Dimension (mm)	86*86*40mm		
Capacity of Modules	One 86*86mm Socket		
Color	Champaign gold/Rose-bengal /black/Stainless steel silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.6	52*41*39	0.083	12

Outline Drawing:




SFGLC86-1



Panel Material	Stainless Steel		
Panel Dimension (mm)	86*86*40mm		
Capacity of Modules	One 45*45mm/86 type Socket		
Color	Champaign gold/Rose-bengal /black/Stainless steel silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.6	52*41*39	0.083	12

Outline Drawing:




SFGLC86-2



Panel Material	Stainless steel		
Panel Dimension (mm)	86*171*40mm		
Capacity of Modules	Two 45*45mm/86 type Socket		
Color	Champaign gold/Rose-bengal /black/Stainless steel silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.6	52*41*39	0.083	12

Outline Drawing:




SFGLC86-3



Panel Material	Stainless steel		
Panel Dimension (mm)	86*258*40mm		
Capacity of Modules	Three 45*45mm/86 type Socket		
Color	Champaign gold/Rose-bengal /black/Stainless steel silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
17.6	52*41*39	0.083	12

Outline Drawing:





Recessed in the top of desk/table , simply press down to open it with Spring clip.



Configuration and dimension can be customization.

Adjustable built-in frame fitting for more optional plug clearance.



6 way



8 way





HT-146TS



HT-86SS

COMMScope
CRESTRON
NEUTRIK
Extron



Modular design for Configuration
of power supply and communication,
45*45mm modular, 86 type switch
and International Brand data etc.



F2



F4



F11



F15



F18



F59



F65A



F21/F23



F55



F50



F51



F52

Anodised Ev1 Aluminum/Brushing wire drawing flap , optional black powder-coated housing.



FZ-L002A/B



Be closed while device have been plugged in and without crushing the cables.



FZ-521C



Side-mounting


FMD: Flush Mount Desktop

FX-ZSG-A



Panel Material	Aluminum alloy		
Panel Dimension (mm)	260*158		
Cutout (mm)	233*129		
Capacity Of Modules	Power outlet+Data outlet or USB charging : Customized as required		
Feature	Dual flip without spring		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.6	52*28.5*29.5	0.044	12

Outline Drawing:

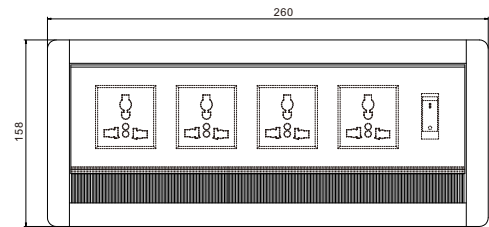


FZ-Z300



Panel Material	Aluminum alloy		
Panel Dimension (mm)	300*127		
Cutout (mm)	290*110		
Capacity Of Modules	Power outlet+Data outlet or USB charging : Customized as required		
Feature	Dual flip without spring		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.6	52*28.5*29.5	0.044	12

Outline Drawing:

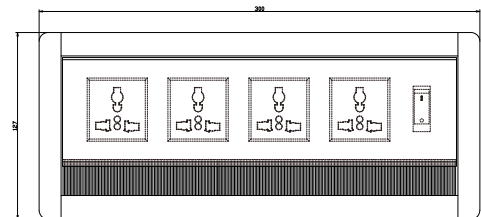


FZ-L001A/B



Panel Material	Aluminum alloy(silver) , zinc alloy(black)		
Panel Dimension (mm)	400*145*97		
Cutout (mm)	380*135		
Capacity Of Modules	3*86type modules		
Color	Silver / Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.6	52*28.5*29.5	0.044	12

Outline Drawing:

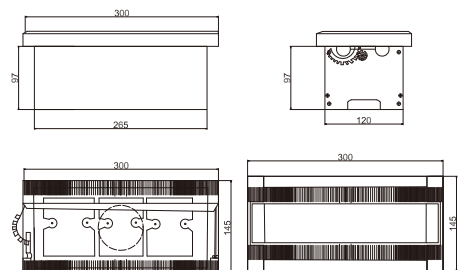


FZ-L002A/B



Panel Material	Aluminum alloy		
Panel Dimension (mm)	340*130		
Cutout (mm)	328*116		
Capacity Of Modules	Power outlet+Data outlet or USB charging : Customized as required		
Color	Silver / Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
10.6	52*28.5*29.5	0.044	12

Outline Drawing:

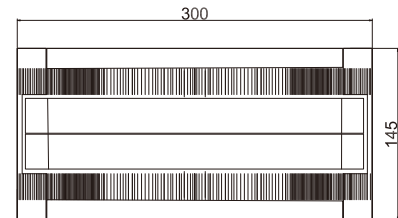


FZ-507S/FZ-507B



Panel Material	Aluminum alloy/steel		
Panel Dimension (mm)	233*62*45		
Cutout (mm)	229*58		
Capacity Of Modules	Max.9 ways 45*45mm modules		
Color	Silver/ Black/Gray		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
25	51*34*33	0.057	12

Outline Drawing:

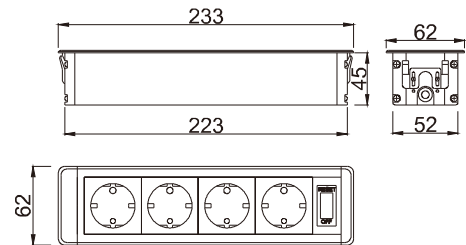


FZ-523



Panel Material	Aluminum alloy		
Panel Dimension (mm)	302*119*122		
Cutout (mm)	289*110		
Capacity Of Modules	Non-standard module		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
11.7	40*25.5*43	0.044	12

Outline Drawing:

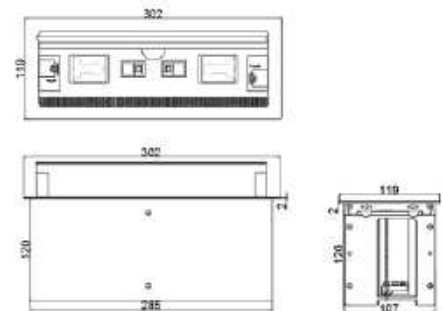


FZ-536



Panel Material	Aluminum alloy		
Panel Dimension (mm)	220*110*76		
Cutout (mm)	180*60*50		
Capacity Of Modules	6 ways 45*45mm modules		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
11.7	40*25.5*43	0.044	12

Outline Drawing:

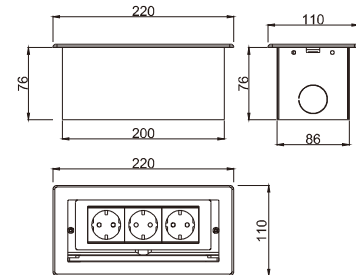


FZ-PFB01



Panel Material	PC		
Panel Dimension (mm)	95*94		
Cutout (mm)	80*80		
Capacity Of Modules	Slide coverplate with outlet&USB		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
8.45	58*49*35	0.099	33

Outline Drawing:

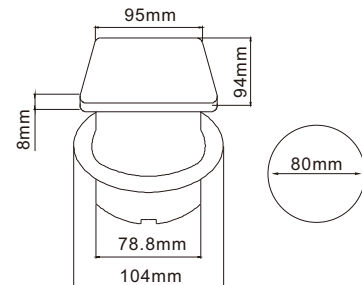


FZ-ZS1



Panel Material	ABS		
Panel Dimension (mm)	67.8*33.4*24.7		
Output voltage	5W, 18W		
Scope of charging	Charger with USB port		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

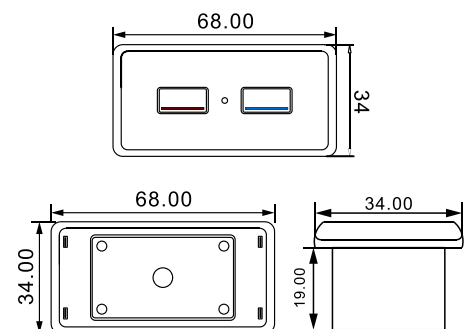


FZ-ZS2



Panel Material	ABS		
Panel Dimension (mm)	Ø45mm		
Output voltage	5W, 18W		
Scope of charging	Charger with USB port		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:




FZ-PFB02



Panel Material	PC		
Panel Dimension (mm)	95*94		
Cutout (mm)	80*80		
Capacity Of Modules	Slide coverplate with 45*45mm socket & USB		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
8.45	58*49*35	0.099	33

Outline Drawing:

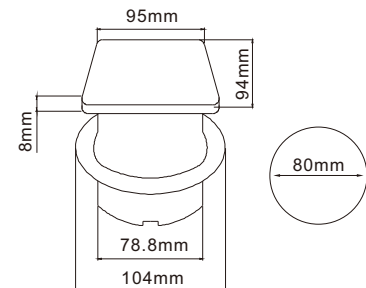


FZ-501B



Panel Material	Zinc alloy		
Panel Dimension (mm)	Ø110		
Cutout (mm)	Ø102		
Capacity Of Modules	3 ways (45*45mm)modules		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

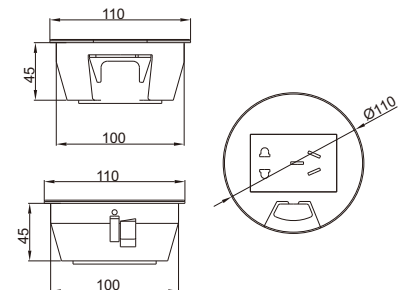


FZ-501S



Panel Material	Zinc alloy		
Panel Dimension (mm)	Ø110		
Cutout (mm)	Ø102		
Capacity Of Modules	3 ways (45*45mm)modules		
Color	Silver		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

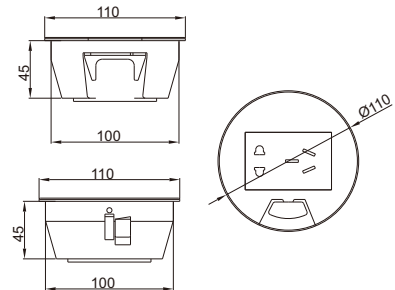


FZ-502W



Panel Material	Fire-retardant PC plastic		
Panel Dimension (mm)	Ø120		
Cutout (mm)	Ø108		
Capacity Of Modules	45*45mm modules		
Color	White		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

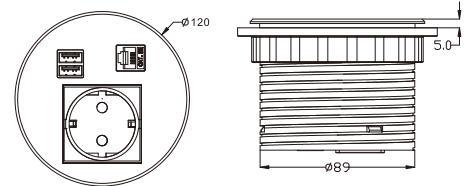


FZ-502B



Panel Material	Fire-retardant PC plastic		
Panel Dimension (mm)	Ø120		
Cutout (mm)	Ø108		
Capacity Of Modules	45*45mm modules		
Color	Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

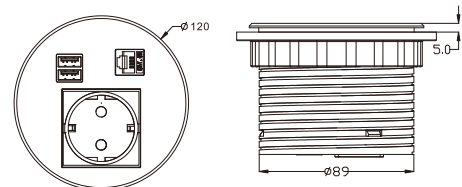


SFGS811-UK



Panel Material	PC		
Panel Dimension (mm)	Ø90		
Cutout (mm)	Ø85		
Capacity Of Modules	typeA,typeC		
Color	white,etc		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

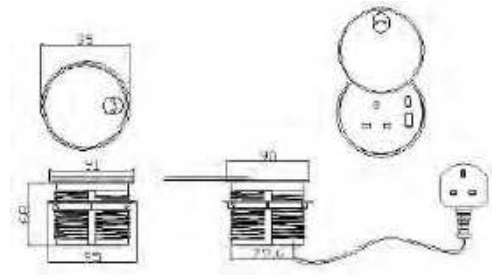


SFGS811-WL



Panel Material	PC		
Panel Dimension (mm)	Ø90		
Cutout (mm)	Ø85		
Capacity Of Modules	typeA,typeC,Wireless charging		
Color	white,etc		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:




SFGS811-EU



Panel Material	PC		
Panel Dimension (mm)	Ø90		
Cutout (mm)	Ø85		
Capacity Of Modules	typeA,typeC,Wireless charging		
Color	white,etc		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

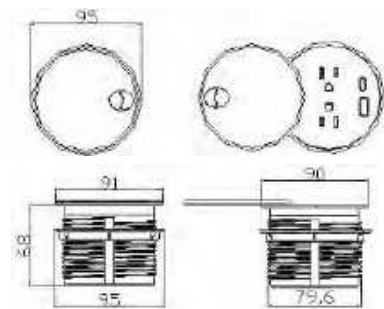


SFGS811-US



Panel Material	PC		
Panel Dimension (mm)	Ø90		
Cutout (mm)	Ø85		
Capacity Of Modules	typeA,typeC,US Socket		
Color	white,etc		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
16	53*34*24	0.043	50

Outline Drawing:

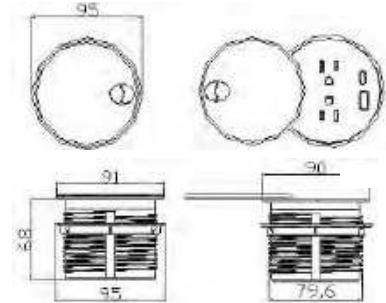


FZ-561E



Panel Material	Aluminum alloy+PC		
Panel Dimension (mm)	285*109*104		
Cutout (mm)	258*105		
Capacity Of Modules	8 ways 45*45mm modules		
Color	Silver / Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
11.5	63*39*28	0.069	7

Outline Drawing:

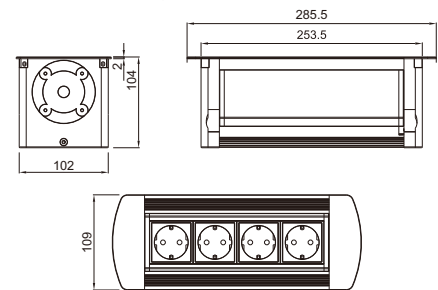


FZ-561



Panel Material	Aluminum alloy+PC		
Panel Dimension (mm)	285.5*109*104		
Cutout (mm)	258*105		
Capacity Of Modules	8 ways 45*45mm modules		
Color	Silver / Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M³)	Set/CTN
11.5	63*39*28	0.069	7

Outline Drawing:

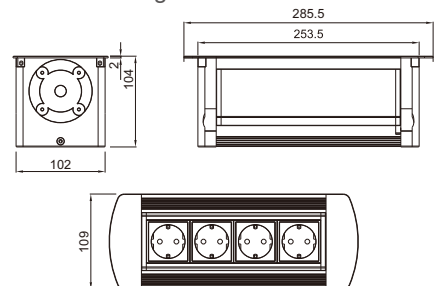


FZ-521S



Panel Material	Aluminum alloy			
Panel Dimension (mm)	265*130			
Cutout (mm)	254*116			
Capacity Of Modules	9 ways 45*45mm modules			
Color	Silver			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
10.6	52*28.5*29.5	0.044	12	

Outline Drawing:

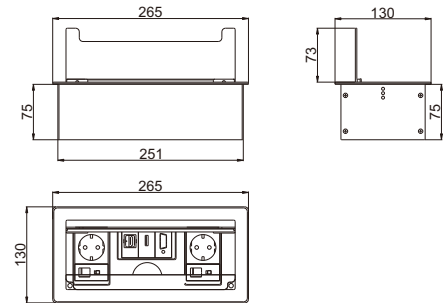


FZ-521B



Panel Material	Aluminum alloy			
Panel Dimension (mm)	265*130			
Cutout (mm)	254*116			
Capacity Of Modules	9 ways 45*45mm modules			
Color	Black			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
32	56*31*31	0.054	20	

Outline Drawing:

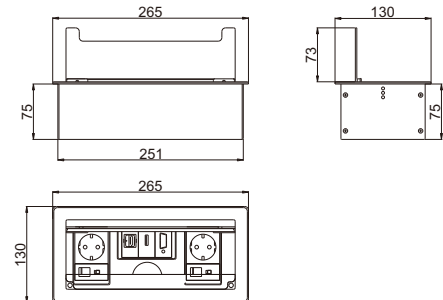


FZ-521C



Panel Material	Fire-retardant PC plastic			
Panel Dimension (mm)	265*130			
Cutout (mm)	254*116			
Capacity Of Modules	9 ways 45*45mm modules			
Color	Silver / Black			
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN	
32	56*31*31	0.054	20	

Outline Drawing:

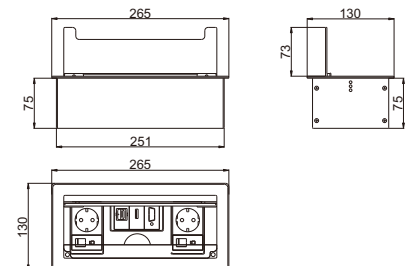


FZ-525



Panel Material	Aluminum alloy		
Panel Dimension (mm)	340*150		
Cutout (mm)	312*132		
Capacity Of Modules	8 ways 45*45mm modules		
Feature	Dual flip with spring		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
32	56*31*31	0.054	20

Outline Drawing:

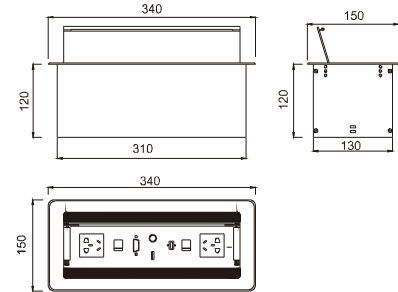


FZ-528



Panel Material	Aluminum alloy		
Panel Dimension (mm)	265*130		
Cutout (mm)	254*116		
Capacity Of Modules	8 ways 45*45mm modules		
Color	Silver / Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ³)	Set/CTN
32	56*31*31	0.054	20

Outline Drawing:




FZ-525



Panel Material	Aluminum alloy		
Panel Dimension (mm)	340*150		
Cutout (mm)	312*132		
Capacity Of Modules	8 ways 45*45mm modules		
Feature	Dual flip with spring		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ²)	Set/CTN
32	56*31*31	0.054	20

Outline Drawing:

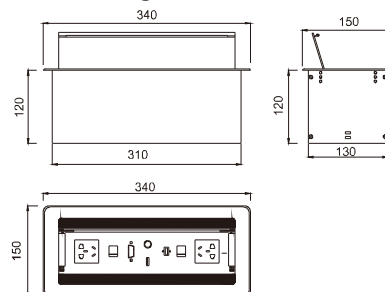


FZ-528



Panel Material	Aluminum alloy		
Panel Dimension (mm)	265*130		
Cutout (mm)	254*116		
Capacity Of Modules	8 ways 45*45mm modules		
Color	Silver / Black		
G.W/CTN(KGS)	MEASUREMENT/CTN(CM)	TOTAL(M ²)	Set/CTN
32	56*31*31	0.054	20


Outline Drawing:





Accessories





01 More Categories




Modules



Panels



Frames



Bottom boxes



Connector

02 Customization



Material



Size



Parts



Colour



Configuration



Packing

Different solutions can be customized for smart home, network wiring and electrician customers;

03 International

45x45mm series

45



128 type series

128




Bs1363 86/146 type module socket

86



5V 4.2A USB charger, HDMI, Cat6, RCA, and so on



1.45*45mm Modules



2.Video & Audio modules



3.Multimedia Modules



4.Connector With Cable



5. Waterproof Sockets



6.RCD Sockets



7.Splash Box




8.Frame,Box,Faceplate,Accessories



45×45mm Module




“Snap-in” design:

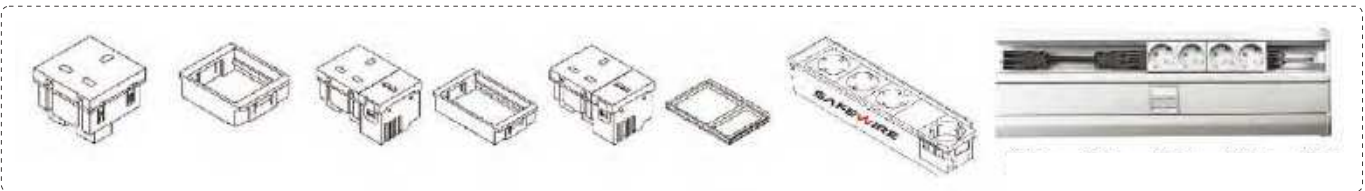

More optional color:



Easy-Wiring:

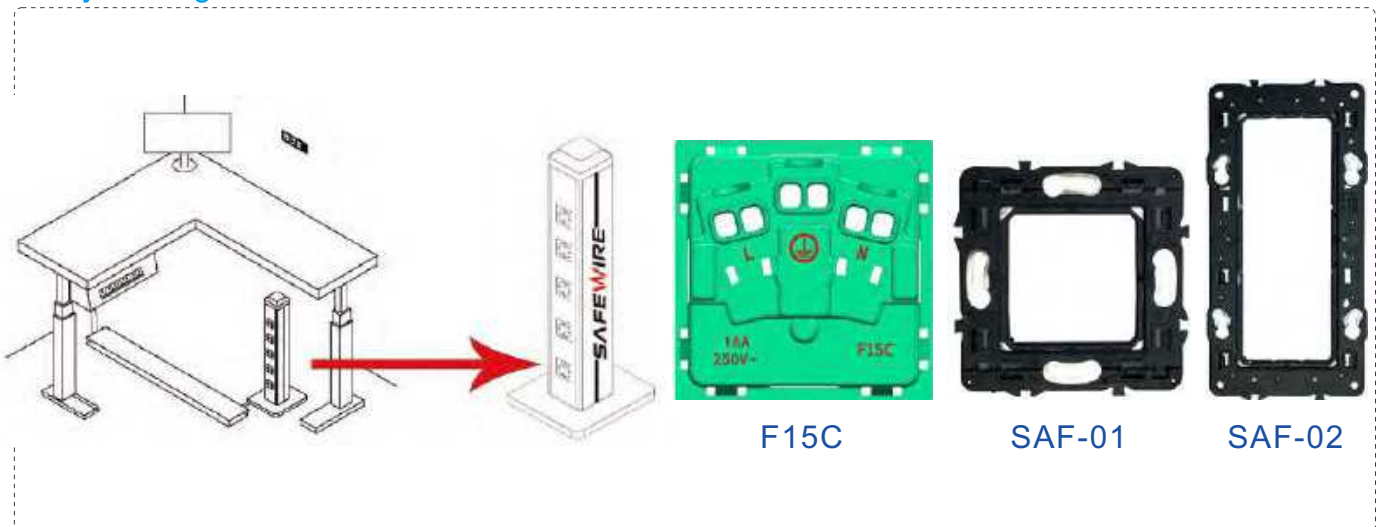

 Floor Socket and Desktop socket with optional 45*45mm modules

Floor Socket



F1



F11B



F22



F15B




F16



F81

Floor Socket

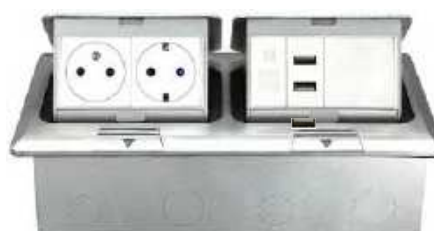

F20




F8



F16C



F15C



F21



F8D



F82

Wall socket



F16C



F15C



SAF-01



SAF-02


1.45*45mm Modules

Features

1.Applicable for wiring of Distribution box ,wall switch,floorbox and electrical socket etc.



2.More optional color.

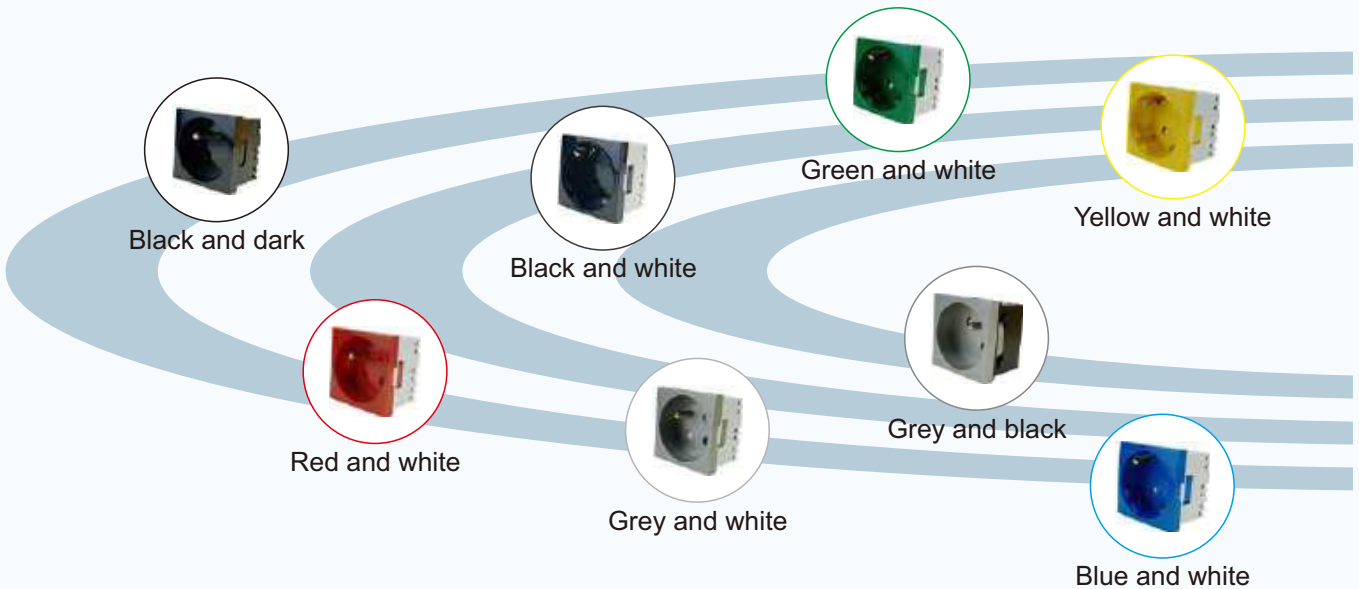


3.Easy wiring,toolless installation,save cost!




Advantage


1.Full range power socket + Switch+Data+USB charger+Multimedia modules etc.

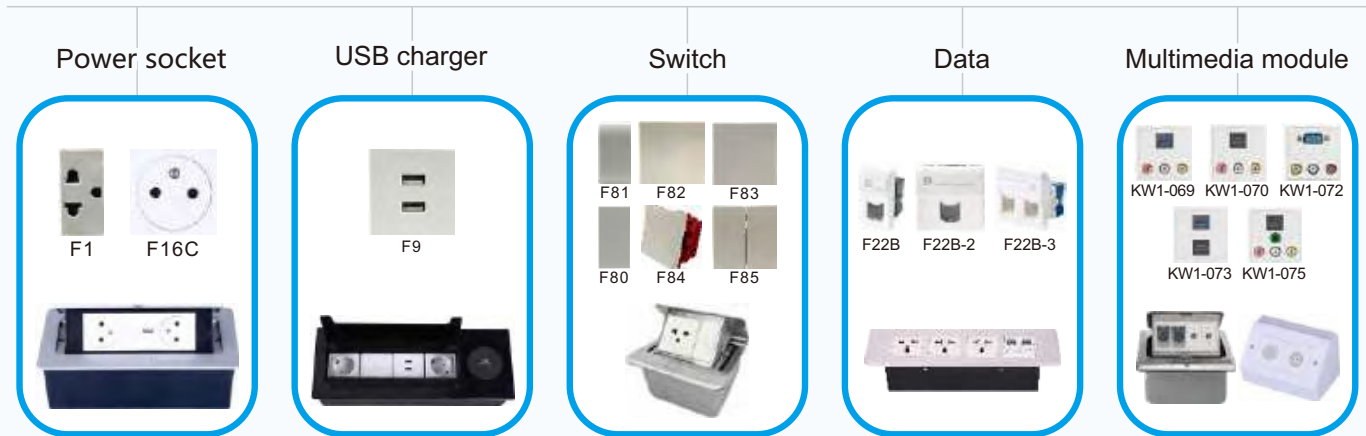

2.More color with affordable MOQ.

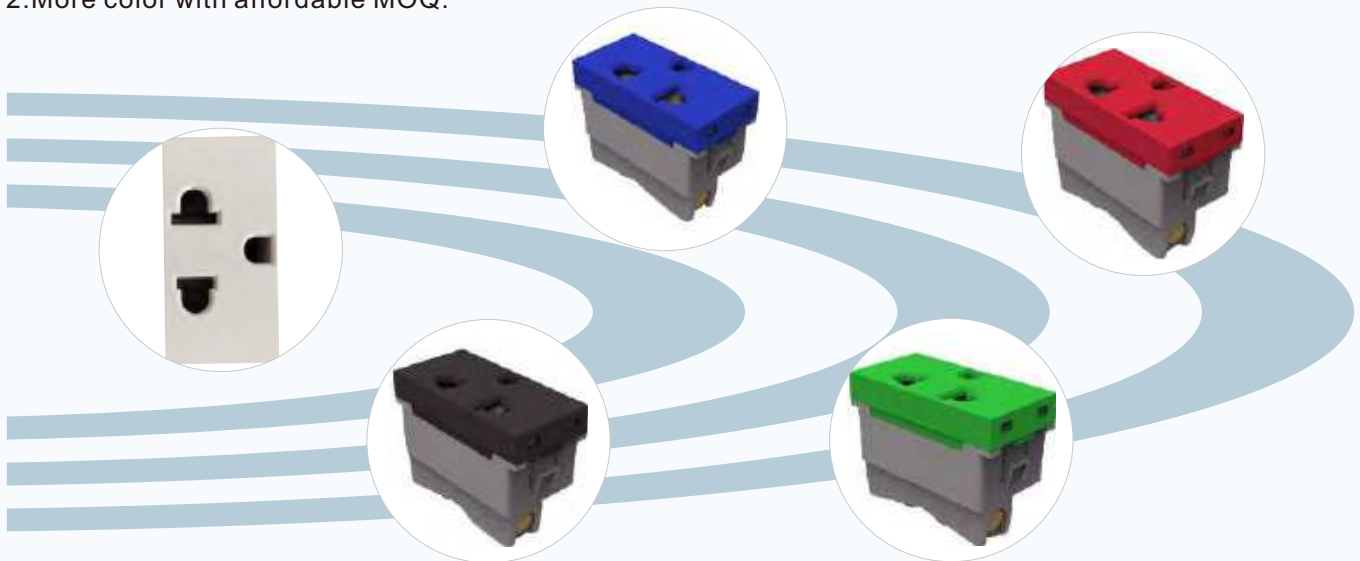


3.CE Certificated and supply with support,frame and coverplate accessories etc.

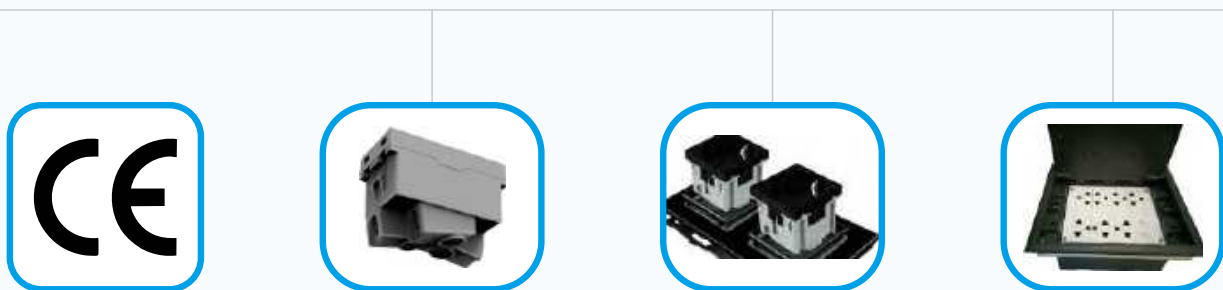


45×45mm Series Modules

Product mix


1 way

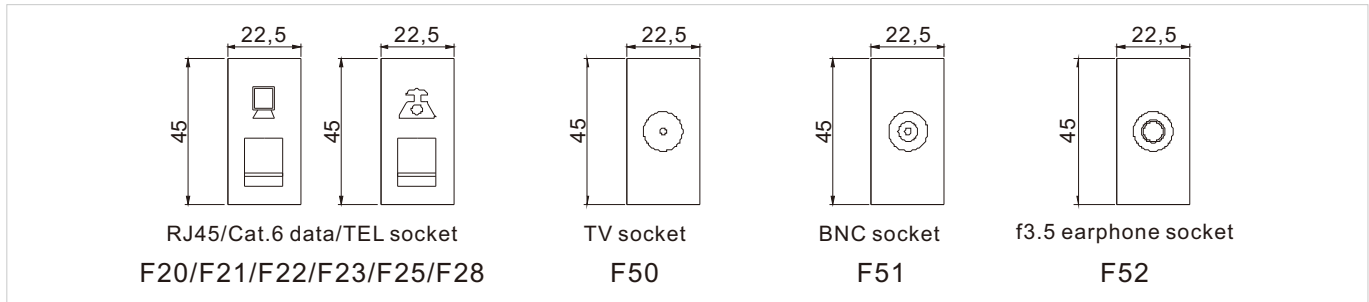


2 way

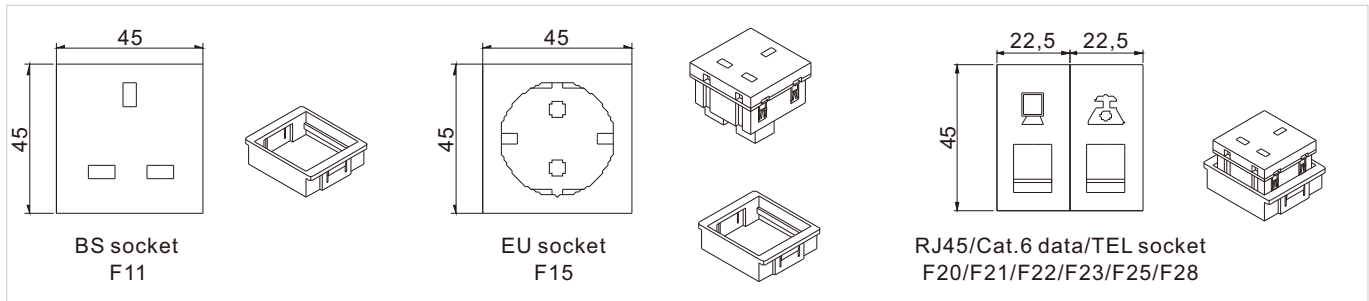


3 way

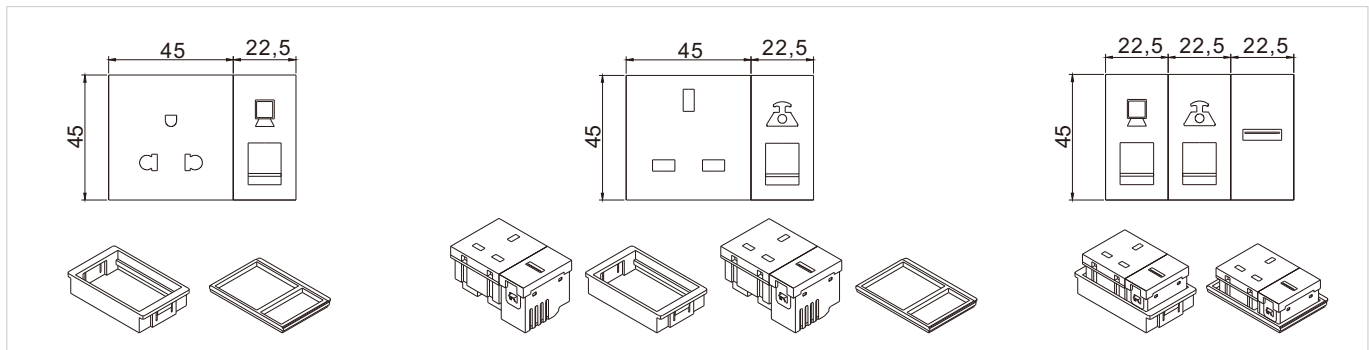

4 way

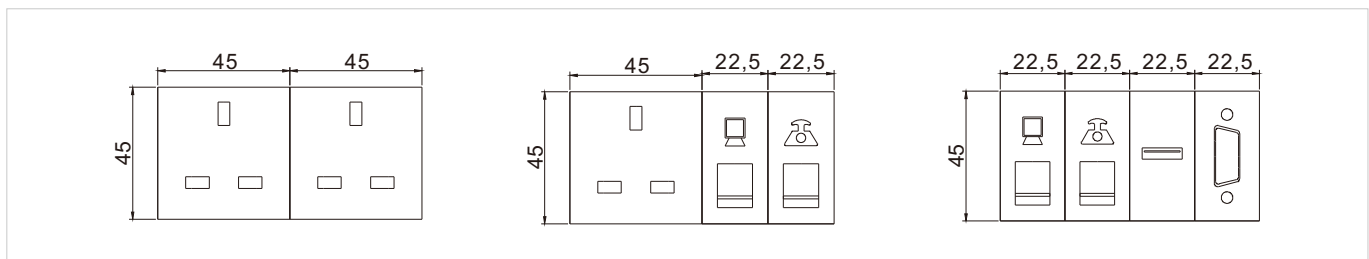

45*45mm Modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F1	22.5x45mm	Europeab-American socket, Brazil NEMA5-15R & CEE 7-16 Outlet 16A-250V & 15A-127V, 2P+E	white/black	 F2	22.5x45mm	2 pin socket, 10A, 250V; 2P	white/black
 F2B	45 × 22.5MM	US 16A multi-function socket	white/black	 F2C	45 × 22.5MM	US 15A socket	white/black
 F3A	45x45mm	3 pin 16A, 220V; Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V	white/black	 F3B	45x45mm	3 pin 10A, 220V; Australia & New Zealand AS/NZS 3112 Outlet 10Amp 250V	white/black
 F3C	45x45mm	3 pin 15A, 220V; Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V, with SAA certificate	white/black	 F3D	45x45mm	3 pin 10A, 220V; Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V, with SAA certificate	white/black
 F4	45x45mm	International Multi-configuration Outlet 13A~250V & 15A-127V of 90 degree angle, 10A, 250V; 2P+E	white/black	 F5	45x45mm	Switzerland SEV 1011 Type 13 Outlet, 10A, 250V; 2P+E	white/black
 F6	45x22.5mm	Italy & Chile CEI16/VII Outlet 16Amp 250V; 2P+E	white/black	 F7	45x45mm	Danish socket, 16A, 250V	white
 F10	45x45mm	Israel socket, 16A, 250V	white	 F11	45x45mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V, 90 degree; 2P+E	white/black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F11B	45x45mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V , 45 degree; 2P+E	white/ black	 F11C	45x67.5mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V , 45 degree; 2P+E	white/ black
 F15	45x45mm	European socket (Schuko), 16A, 250V , Angle 0 degree or 90 degree, 2P+E with shutter socket, screw terminals; 2P+E	white/ black	 F15B	45x45mm	European socket (Schuko), 16A, 250V , Angle 45 degree , 2P+E with shutter socket, screw terminals;	white/ black
 F15C	45x45mm	Pop up German socket, 16A, 250V , Angle 0 degree or 90 degree, 2P+E with shutter socket, screw terminals; 2P+E	white/ black	 F15H	45x45mm	Grounding German socket, 16A, 250V , Angle 0 degree or 90 degree, 2P+E with shutter socket, screw terminals; 2P+E	white/ black
 F16	45x45mm	French Socket, 16A, 250V; 2P+E;	white/ black	 F16B	45x45mm	French Socket, 16A, 250V, Angle 45 degree , screwless terminals; 2P+E	white/ black
 F16C	45x45mm	Ip44 French Socket, 16A, 250V, screwless terminals; 2P+E; With pop up mechanism protector shutter, 4 side snap-in clip into support.	white/ black	 F18	45x45mm	Brazil NEMA5-15R & CEE 7-16 Outlet 16A-250V & 15A-127V	white/ black
 F18B	45x45MM	US 16A multi-function socket	white/ black	 F19	45x45mm	S.Africa/Brazil NBR 14136-2002 Outlet 16Amp 250V (Also support S. Africa, India and UK BS546 5 Amp 250V male plug)	white/ black
 F19B	45x22.5mm	S.Africa/Brazil NBR 14136-2002 Outlet 16Amp 250V	white/ black	 F20	45x45MM	US 15A socket	white/ black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F1-2	22.5×45MM	Thailand 6 pin power socket	white/ black	 F8	22.5x45mm	USB charging, single port output 5VDC 2.1A, maximum charging current 1*2100mA, screw terminal.	white/ black
 F8C	22.5x45mm	USB Charger 1A	white/ black	 F8D	22.5x45mm	USB charging, dual port output 5VDC 2.1A shared, maximum charging current 1*2100mA, screw terminal, Support YD/T1591-2009, BC1.2, Apple and Samsung phone and IPAD.	white/ black
 F9	45x45mm	USB charging, dual port output 5VDC 2.1A, maximum charging current 1*2100mA, screw terminal.	white/ black	 F1031	45x45mm	USB charging, triple port output 5VDC 3.1A, maximum charging current 1*3100mA, type A+ type C USB charger; screw terminal.	white/ black
 F1042A/A	45x45mm	Dual port USB charger of 4.2A 5VDC; with Short time short- circuit protection& identifying chip; type A/A; Materials be RoHS directive	white/ black	 F1042A/C	45x45mm	Dual port USB charger of 4.2A 5VDC; with Short time short- circuit protection& identifying chip; type A/C;	white/ black
 F1042C/C	45x45mm	Dual port USB charger of 4.2A 5VDC; with Short time short- circuit protection& identifying chip; type C/C;	white/ black	 F1021A-A/A	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/A; with Short time short-circuit protection& identifying chip; with LED indicator.	white/ black
 F1021A-A/C	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/C; with Short time short-circuit protection& identifying chip; with LED indicator.	white/ black	 F1021AB-A/C	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/C; with Short time short-circuit protection& identifying chip; with LED indicator and protector shutter;	white/ black
 F1045	45x45mm	45W USB type C function key; 45W	white/ black	 F1036	45x45mm	36W USB-1A1C function key; 36W	white/ black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F1020	45x45mm	Input:100-240VAC 50/60Hz 0.5A Output:5VDC,3A、 9VDC,2.22A、 12VDC,1.67A Total output power:20W Max	white/ black	 F1030	45x45mm	Input: 100-240VAC 50/60 Hz 0.5A Output: 5VDC,3A、 9VDC,3A、 12VDC, 2.5A15VDC,2A、 20VDC,1.5A Total output power: 30W Max	white/ black
 F21	22.5x45mm	Cat 5e RJ45 socket with shutter;	white/ black	 F21B	22.5x45mm	Cat 6 RJ45 socket with shutter;	white/ black
 F23	22.5x45mm	Rj11 Telephone socket with shutter, regular with 4 contact pins. 2 contact pins and 6 contact pins should be customization production.;	white/ black	 F23B	22.5x45mm	2 gang RJ45 CAT6 +RJ11 Telephone socket without shutter	white/ black
 F23C	22.5x45mm	2 gang RJ45 CAT6 without shutter	white/ black	 F22	22.5 × 45MM	Rj45 UTP Cat5E toolless with shutter Shield / unshield	white/ black
 F22B	22.5 × 45MM	Rj45 UTP Cat6 toolless with shutter Shield / unshield	white/ black	 F22C	22.5 × 45MM	Rj45 STP Cat6A toolless with shutter Shield / unshield	white/ black
 F22-2	45 × 45MM	RJ45 UTP Cat5E toolless with shutter	white/ black	 F22B-2	45 × 45MM	RJ45 UTP Cat6 toolless with shutter	white/ black
 F22-3	45 × 45MM	Rj45 UTP Cat5E toolless 2 port with shutter	white/ black	 F22B-3	45 × 45MM	RJ45 UTP Cat6 toolless 2 port with shutter	white/ black
 F50	22.5x45mm	Single male TV socket;	white/ black	 F50B-F	22.5x45mm	Single Female TV socket;	white/ black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F50B-M	22.5x45mm	Single male TV socket;	white/ black	 F51	22.5x45mm	BNC socket	white/ black
 F52	22.5x45mm	Φ3.5 earphone for audio/video connector, screw terminals	white/ black	 F52A	22.5x45mm	Φ3.5 earphone for audio/video connector, screw terminals	white/ black
 F52B	22.5x45mm	Φ3.5 earphone for audio/video connector, Solderless	white/ black	 F52C	22.5x45mm	Φ3.5 earphone for audio/video connector, straight blade;	white/ black
 F52D	22.5x45mm	Φ3.5 earphone for audio/video connector, with cable	white/ black	 F53	22.5x45mm	DIN(eight pins)	white/ black
 F55	22.5x45mm	Audio socket provide the stereo audio connect for device such as DVD drive, camera etc.;	white/ black	 F56	22.5x45mm	Video socket provide the video connect for device such as DVD drive, camera etc.;	white/ black
 F57	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio	white/ black	 F57-A	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; Solder type;	white/ black
 F57-B	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; soldless/screw type;	white/ black	 F57-C	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; straight blade type;	white/ black
 F58	22.5x45mm	Sound socket provide the stereo audio connect for device such as DVD drive, camera etc.;	white/ black	 F59	22.5x45mm	USB for data 2.0, USB to USB, VBus, D+, Ground, shielded	white/ black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F60-A	22.5x45mm	Male Kalon socket for XLR plug, soldering connection,	white/black	 F60-B	22.5x45mm	Male Kalon socket for XLR plug, screwing connection,	white/black
 F61	22.5x45mm	Composite video, Left Audio and Right Audio, RJ45 to RCA.	white/black	 F62A	22.5x45mm	Speaker socket, soldering connection;	white/black
 F62B	22.5x45mm	Speaker socket, screwing connection;	white/black	 F63	22.5x45mm	Audio wiring socket; Dimension: 22.5 mm*45 mm	Black/White
 F65A	22.5x45mm	15 Pins VGA (male type), RS232 socket, soldering connection	white/black	 F65B	22.5x45mm	15 Pins VGA (male type), RS232 socket, screwing connection	white/black
 F66A	22.5x45mm	15 Pins VGA (female type); RS232 socket, soldering connection	white/black	 F66B	22.5x45mm	15 Pins VGA (female type); RS232 socket, soldering connection	white/black
 F67A	22.5x45mm	9 Pins VGA (male type), RS232 socket, soldering connection	white/black	 F67B	22.5x45mm	9 Pins VGA (male type), RS232 socket, screwing connection	white/black
 F68A	22.5x45mm	9 Pins VGA (female type); RS232 socket, soldering connection	white/black	 F68B	22.5x45mm	9 Pins VGA (female type); RS232 socket, screwing connection	white/black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F69A	22.5x45mm	HDMI, 180 degree, 2.0 Standard female/female HDMI socket with protective shutter	white/black	 F69B	22.5x45mm	HDMI, 90 degree, Male HDMI socket, need additional frame size: 45*45mm when installed in SNAP-in frame	white/black
 F69C	45x45mm	HDMI, 180 degree, Male HDMI socket, need additional frame size: 45*45mm when installed in SNAP-in frame	white/black	 F70	22.5x45mm	Empty plate; material: Polycarbonate; color: white	white/black
 F71	22.5x45mm	S terminal; soldering connection	white/black	 F80	45x22.5mm	1 way switch, 10A, 250V	white/black
 F81	45x22.5mm	1 way curve switch, 10A, 250V	white/black	 F82	45x45mm	2 way switch, 10A, 250V	white/black
 F83	45x45mm	2 way switch, 10A, 250V	white/black	 F84	45x45mm	2 gang/Double Pole Switch 16 Amp 250V, nylon 66, PC coverplate	white/black
 F85	45x45mm	Single switch, 16A, 250V, nylon 66, PC coverplate	white/black	 F100A	45x45mm	2 gang 45*45mm modules with optional 2*RJ45 for patch panel/floor box	white/black
 F100B	45x45mm	2 gang 45*45mm modules with optional 1*RJ45 + 1*RJ11 for patch panel/floor box	white/black	 F100C	45x45mm	2 gang 45*45mm modules with optional 2*RJ11 for patch panel/floor box	white/black
 F-QB53	45x45mm	Acousto-Optic Delay Switch	white/black				















Modules/Waterproof Box Electric Accessories








Picture	Item	Specification	Outline of product
	F15B-1	Color customization single European Schuko Socket without key, more optional color choice, 45 degree for plug easy	16A, 250V, 2P+E, screw terminals;
	F15B-2	Color customization double European Schuko Socket without key, more optional color choice, 45 degree for plug easy	16A, 250V, 2P+E, screw terminals;
	F15B-3	Color customization triple European Schuko Socket without key, more optional color choice, 45 degree for plug easy	16A, 250V, 2P+E, screw terminals;
	F16B-1	Color customization single French Socket without key, white color	16A, 250V, 2P+E, screw terminals;
	F16B-2	Color customization double French Socket without key, white color	16A, 250V, 2P+E, screw terminals;
	F16B-3	Color customization triple French Socket without key, white color	16A, 250V, 2P+E, screw terminals;
	SAQB-45-1	Color customization single French Socket with protector shutter key, red color; 2P+E Tamper proof insert	16A, 250V, 2P+E, screw terminals;
	SAQB-45-2	Color customization double French Socket with protector shutter key, red color; 2P+E Tamper proof insert	16A, 250V, 2P+E, screw terminals;
	SAQB-45-3	Color customization triple French Socket with protector shutter key, red color; 2P+E Tamper proof insert	16A, 250V, 2P+E, screw terminals;

RECEPTACLE	PLUG	RATING	PRODUCT PICTURES
 AR1-10R	 AR1-10P	10 Ampere 250 Volt Argentinian Receptacle and plug. Polarized. (IRAM 2073)	 F3A F3B F3D
 AU1-10R	 AU1-10P	10 Ampere 250 Volt Australian Receptacle and plug. Polarized. (AS / NZS 3112 2000)	 F3A F3B F3D
 AU2-15R	 AU2-15P	15 Ampere 250 Volt Australian Receptacle and plug. Polarized. (AS / NZS 3112 2000) NOTE: Receptacle also accepts AU1-10P (10 Ampere 250 Volt) plug.	 F3C
 CH1-10R	 CH1-10P	10 Ampere 250 Volt Chinese Receptacle and plug. Polarized. (GB 2009.1-1996, GB 1002-1996, GB 11918-89)	 F3A F3B F3D
 CH2-16R	 CH2-16P	16 Ampere 250 Volt Chinese Receptacle and plug. Polarized. (GB 2009.1-1996, GB 1002-1996, GB 11918-89)	 F3C
 DE1-13R	 DE1-13P	13 Ampere 250 Volt Danish (Formerly 10 Amp) Receptacle and plug. Polarized. (AFSNIT 107-2-D1)	 F7
 EU1-16R	 EU1-16P	16 Ampere 250 Volt European "SCHUKO" Receptacle and plug. Non-Polarized. 4.8 mm Pins. Receptacle CEE 7. Plug CEE 7-7.	 F15 F15B F15C F15H

Modules/Waterproof Box Electric Accessories


RECEPTACLE	PLUG	RATING	PRODUCT PICTURES
 FR1-16R	 EU1-16P	16 Ampere 250 Volt French Receptacle grounding pin polarizes CEE 7-7 plug. 4.8 mm Pins.	   F16 F16B F16C
 IS1-16R	 IS1-16P	16 Ampere 250 Volt Israeli Receptacle and plug. Polarized. (SI 32) NOTE: Receptacle also accepts Europlug with 4.0 mm diameter pins.	 F10
 IT1-10R	 IT1-10P	10 Ampere 250 Volt Italian Receptacle and plug. Non-Polarized. 4.0 mm Pins. (CEI 23-16 / VII 1971)	 F6
 IT2-16R	 IT2-16P	16 Ampere 250 Volt Italian Receptacle and plug. Non-Polarized. 5.0 mm Pins. (CEI 23-16 / VII 1971)	 F6
 JA1-15R	 JA1-15P	15 Ampere 125 Volt Japanese Receptacle and plug. Polarized. (JIS 8303)	 F20
 SW1-10R	 SW1-10P	10 Ampere 250 Volt Swiss Receptacle and plug. Polarized. 4.0 mm Pins. (SEV 1011. 1959)	 F5
 SW2-16R	 SW2-16P	16 Ampere 250 Volt Swiss Receptacle and plug. Polarized.	 F5

Modules/Waterproof Box Electric Accessories

RECEPTACLE	PLUG	RATING	PRODUCT PICTURES
 UK1-13R	 UK1-13P	13 Ampere 250 Volt United Kingdom Receptacle and fused plug. Polarized. (BS 1363A)	 F11 F11B
 UK2-15R	 UK2-15P	15 Ampere 250 Volt United Kingdom Receptacle and plug. Polarized. (BS 546A) NOTE: Interchangeable with South Africa receptacle and plug. Rated 16 Ampere 250 Volt.	 F19

F16C EMC, LVD, RoHS Certificates and Reports



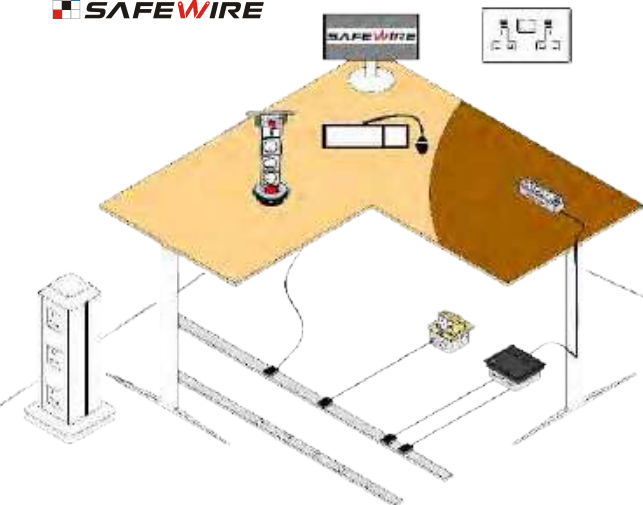

FLOOR BOX



MULTIMEDIA
INFORMATION BOX



GRAND STAGE
FLOOR SOCKET



1U/2U MOUNTING
CABINET PDU


2.Video & Audio modules

Feature

1.Full range LAN ,HDMI,Audio,Acoustics,XLR/Canon,Dimmer module etc.

LAN	HDMI	Audio	Acoustics	XLR/Canon
 CD-2-1	 CD-6-1B	 CD-7-1A	 CD-18-A	 CD-20-1A
 CD-3	 CD-6-1D	 CD-14-1A	 CD-18-B	 CD-20-2A
		 CD-14-1B	 CD-19-A	 CD-20-5
			 CD-19-B	

2.Package Shopping : modules/socket+adaptor/connector+cable/accessories.

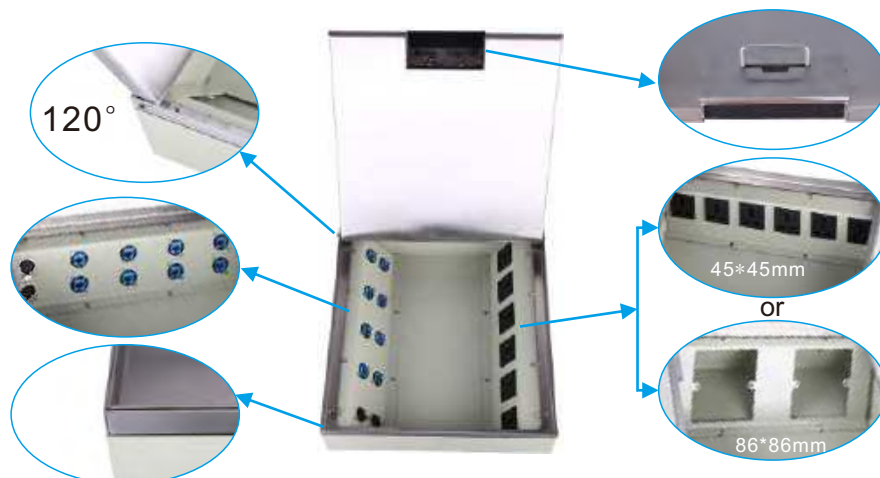

1. Video & Audio Modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 CD-7-1A	23*36mm	RCA(Audio/Video) Solderless	white/ black	 CD-8-1A	23*36mm	Audio solderless	white/ black
 CD-9-1A	23*36mm	Video solderless	white/ black	 CD-10-1A	23*36mm	Microphone solderless	white/ black
 CD-11-1A	23*36mm	3.5 earphone solderless & straight blade	white/ black	 CD-12	23*36mm	TV socket	white/ black
 CD-13	23*36mm	F socket	white/ black	 CD-14-1A	23*36mm	LC Optical fiber	white/ black
 CD-14-1B	23*36mm	SC Optical fiber	white/ black	 CD-14-1C	23*36mm	FC optical fiber	white/ black
 CD-15	23*36mm	DC outlet	white/ black	 CD-15	23*36mm	BNC Monitoring	white/ black
 CD-17-1A	23*36mm	8 Pin Female microphone	white/ black	 CD-17-2A	23*36mm	6 Pin Female microphone	white/ black

Modules/Waterproof Box Electric Accessories

Product Picture	Size	Description	Color
 CD-18-A	23*36mm	Acoustics male	white/ black
 CD-19-A	23*36mm	DVI Solder	white/ black
 CD-20-2A	23*36mm	DM Female XLR/Canon	white/ black


Product Picture	Size	Description	Color
 CD-18-B	23*36mm	Acoustics Female	white/ black




Product Picture	Size	Description	Color
 CD-20-1A	23*36mm	Male XLR/Canon solderless	white/ black

Product Picture	Size	Description	Color
 CD-20-5	23*36mm	Duale Female XLR/Canon /Dual microphone	white/ black

Product Picture	Size	Description	Color
 CD-20-2B	23*36mm	DM Female XLR/Canon	white/ black

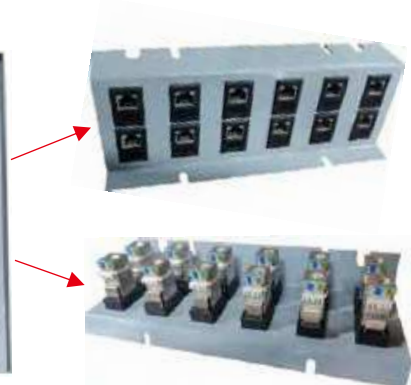


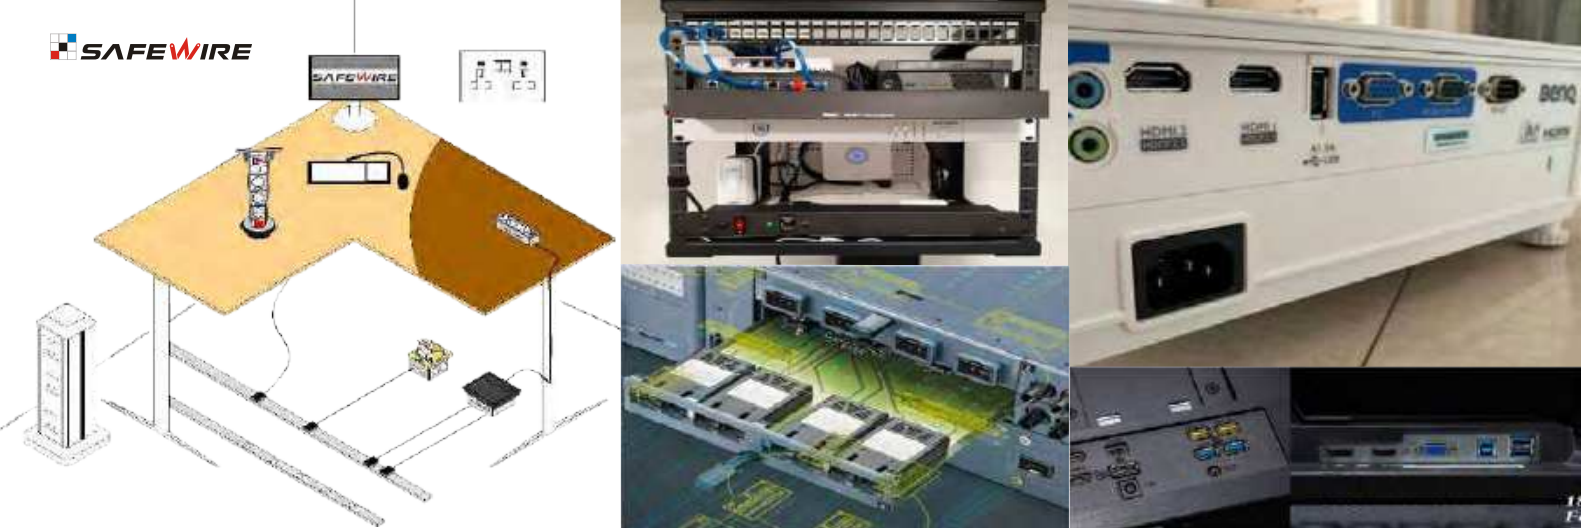


3.Multimedia Modules

Advantage

1.More applicable in Safewire's pop up desktop socket , PDU (power distribution box) etc. and power distribution box.

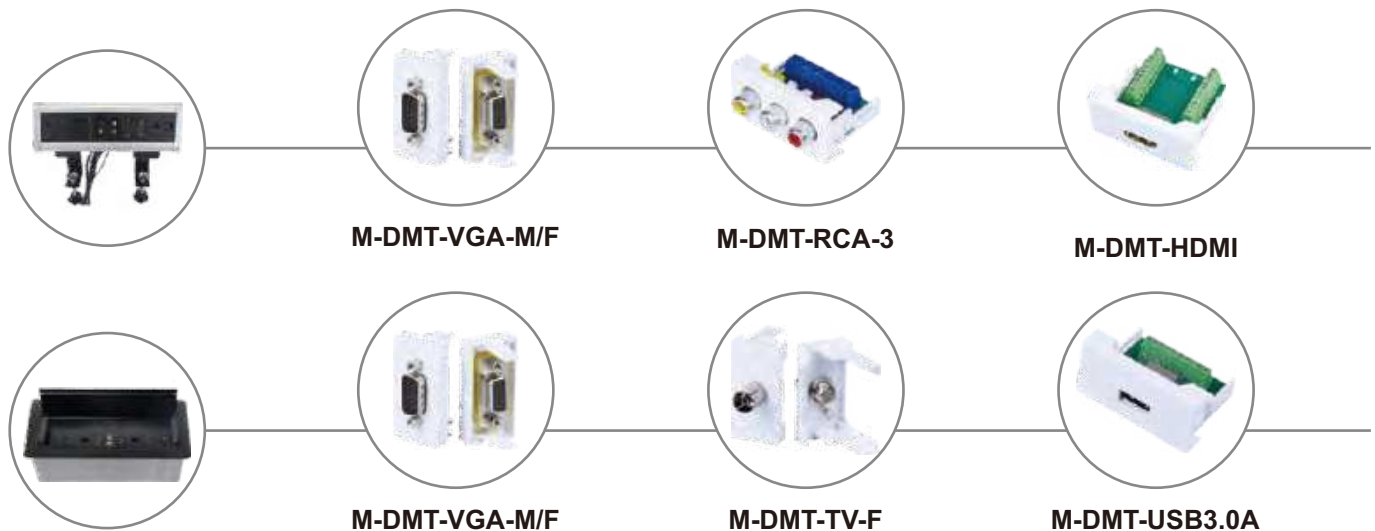

2.Catagories of Safewire's Multi media & keystone modules :

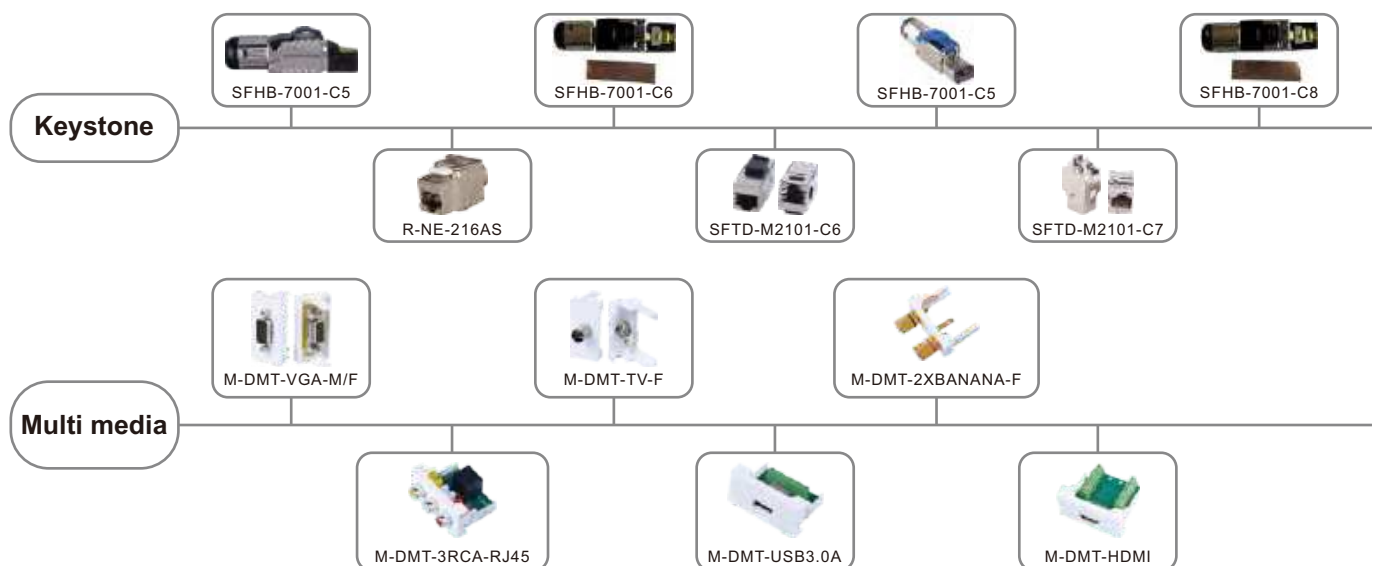

1. Multimedia Modules

Product Picture/Item	Specification	Color	Product Picture/Item	Specification	Color
 M-DMT-DB9-F/F	45*22.5mm with 9 pins, 180° degree of M/F or F/F VGA modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-VGA-M/F	45*22.5mm with 15 pins, 180° degree of M/F or F/F VGA modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-TV-M	45*22.5mm Male socket modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-TV-F	45*22.5mm Female socket modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-2XBANANA-F	45*22.5mm Solder type Dual female BANANA socket modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-BANANA-F	45*22.5mm Solder type Single female BANANA socket modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-3.5 Audio	45*22.5mm Solder type 3.5 Audio jack socket modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-BNC-F-F	45*22.5mm Solder type female BNC socket modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-RCA-2	45*22.5mm Solder type RCA Stereo audio in white and red color jack socket modules from High grade fireproof PC material panel;	Grey /Milk white	 M-DMT-RCA-1	45*22.5mm Solder type RCA red color Audio jack socket modules from High grade fireproof PC material panel; This RCA audio connector is pure copper with gold plating and anti-oxidation; Female F equipment Jacks to an RCA female connection	Grey /Milk white
 M-DMT-1RCA-RJ45	45*22.5mm Solder type RCA red color Audio with RJ45 Jack socket modules from High grade fireproof PC material panel;	Grey /Milk white	 M-DMT-RCA-3	45*22.5mm Solder type composite video (1 x RCA female yellow) and for stereo audio (2 x RCA female white and red) jack socket modules; from High grade fireproof PC material panel;	Grey /Milk white
 M-DMT-2RCA-RJ45	45*22.5mm Solder type RCA red color Audio with RJ45 Jack socket modules from High grade fireproof PC material panel;	Grey /Milk white	 M-DMT-3RCA-RJ45	45*22.5mm Solder type composite video (1 x RCA female yellow) and for stereo audio (2 x RCA female white and red) with RJ45 jack socket modules; from High grade fireproof PC material panel;	Grey /Milk white

Modules/Waterproof Box Electric Accessories


Product Picture/Item	Specification	Color	Product Picture/Item	Specification	Color
 M-DMT-USB2.0-AF	45*22.5mm Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel; Join two USB 2.0 Type-A Male connectors with this coupler connector.	Grey /Milk white	 M-DMT-USB2.0A	45*22.5mm Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel; USB 2.0A with terminal	Grey /Milk white
 M-DMT-USB2.0A-RJ45	45*22.5mm Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel; USB 2.0A with RJ45	Grey /Milk white	 M-DMT-USB3.0A	45*22.5mm Solder type USB 3.0 type A Female connector modules from High grade fireproof PC material panel; USB 3.0A with terminal	Grey /Milk white
 M-DMT-HDMI	45*22.5mm Solder type HDMI female connector modules from High grade fireproof PC material panel; HDMI with terminal	Grey /Milk white	 M-DMT-PHJ	45*22.5mm Solder type HDMI female connector modules from High grade fireproof PC material panel; HDMI with terminal	Grey /Milk white
 SCAT6A-WP-W/B	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	white/ black	 SUSB-3.0-WP-W/B	1)IP67 2)D type USB3.0 waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	white/ black
 SUSB2.0-WP-W/B	1)IP67 2)D type USB2.0 waterproof socket. 3)Materia of shield : PA6BG33 4)Docking type, universal USB interface, plug and play.	white/ black	 STYPEC-WP-W	1)IP67 2)D Type-C waterproof socket. 3)Materia of shield : PA6BG33 4)D Type butt Type, universal type-c interface, plug and play.	white/ black
 SLC-WP-W/B	1)IP67 2)D LC fiber optic waterproof socket. 3)Materia of shield : PA6BG33 4)Butt-on, plug and play.	white/ black	 SHDMI-WP-W/B	1)IP67 2)D type HDMI2.0 version waterproof socket. 3)Materia of shield : PA6BG33 4)Butt-on, universal HDMI interface, plug and play.	white/ black
 SA3FCA-WP	1)IP65 2)D type RJ45 six kinds of waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black	 SA3FCB-WP	1)IP67 2)D type USB3.0 waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black

Modules/Waterproof Box Electric Accessories

Product Picture/Item	Specification	Color	Product Picture/Item	Specification	Color
 SAC3MPA	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black	 ZAC3FCA	1)IP67 2)D type USB3.0 waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black
 ZAC3MPA	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black			
 ZAC3MPA-A	1)IP67 2)D type USB3.0 waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black			
 ZAC3MM	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black	 ZAC3MMB	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black
 ZAC3MMA	1)IP67 2)D type USB3.0 waterproof socket. 3)Materia of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	Black			

2. RJ45 Modules

Product Picture	Size	Description	Product Picture	Size	Description
	25*38mm	unshielded, Krone IDC, RJ45 module		25*38mm	unshielded, Dual IDC, RJ45 module
					
	25*50mm	unshielded, Krone IDC, RJ45 module			
					
	25*50mm	unshielded, Dual IDC, RJ45 module			
					
Product Picture	Material	Description	Product Picture	Material	Description
	PC,Zinc alloy	Phosphor bronze is plated with gold; clamp 22-26AWG conductor		PC,Zinc alloy	Phosphor bronze is plated with gold, clamp 22-26AWG conductor
					
	PC,Zinc alloy	Phosphor bronze is plated with gold; clamp 22-26AWG conductor		PC,Zinc alloy	Phosphor bronze is plated with gold, clamp 22-26AWG conductor
					

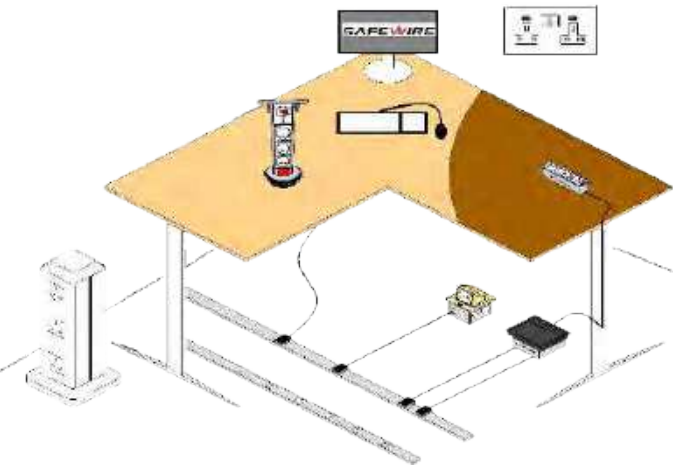

4.Connector With Cables

Feature

1.One-stop solution.



USB



LAN

HDMI



**FIBER
OPTIC**



2.Customized lengths.



3.IP67 waterproof LAN,USB,HDMI with cable.



IP67



Modules/Waterproof Box Electric Accessories

1. Connector With Cables

Product Picture/Item	Categories	Description	Color	Product Picture/Item	Categories	Description	Color
 CD-5-2C	22.5*45mm	20cm 15 Pin Female VGA with cable	white/black	 CD-17-1B	22.5*45mm	20cm 8 Pin Female microphone with cable	white/black
 CD-17-2B	22.5*45mm	20cm 6 Pin Female microphone	white/black	 CD-1-2D	22.5*45mm	2.1 USB 20cm change socket	white/black
 CD-1-3C	22.5*45mm	20cm USB 3.0 data socket with cable	white/black	 CD-6-1C	23*36mm	HDMI with cable	white/black
 H-USB-08-KSB	90 degree USB adaptor with USB socket and 0.8M cable	1). Type:USB 2.0A/USB 2.0A; 2).Materia of shield:ABS; 3). Material of cable: PVC; 4).Degree:90; 5).Nickel Brass Chrome Adapter; 6).0.8M length USB cable;	Black/White				
				 R-NE-68B-KSB	LAN Adaptor and 0.8 M LAN cable	1).Type:CAT5e,Unshielded ABS plastic RJ45 2).Materia of shield:ABS RAL9010; 3).Degree:180; 4).Plating 50U Contact ; 5).0.8M length LAN 24 AWG cable;	Black/White

Modules/Waterproof Box Electric Accessories

Product Picture/Item	Categories	Description	Product Picture/Item	Categories	Description
 H-HDMI-KSB	HDMI with 1.5 Meter length cable	1) Male/Female HDMI With 15cm Cable (Length no less than 15cm) 2) Supports HDMI 2.1 Data Rate up to 48Gbps, 8K60Hz, 4K120Hz 3) additional frame size: 45*45mm when installed in SNAP-in frame Black/ White	 H-RJ11-KSB	Rj11 telephone with cable	1) Type: RJ11 Tephone with 1.5m Cable 2) Material of shield: ABS RAL9010 3) Degree: 180 Black/ White
 SFS-TB1-WP	Waterproof LAN with Cable	1) IP67 2) Type: Cat5E, Unshielded ABS plastic RJ45 3) Material of shield : PA6BG33 4) Degree: 180 5) Locking device, screw fastening 6) 1M length LAN 24 AWG cable Black	 SFS-TB2-WP	Waterproof LAN with Cable	1) IP67 2) Type: Cat6, Unshielded ABS plastic RJ45 3) Material of shield : PA6BG33 4) Degree: 180 5) Locking device, screw fastening 6) 1M length LAN 24 AWG cable Black
 SHDMI-BJ1-WP	Waterproof HDMI with Cable	1) IP67 2) Type: HDMI 2.0 3) Material of shield : PA6BG33 4) Degree: 180 5) Locking device, screw fastening 6) 1M HDMI cable Black	 SUSB3-BJ2-WP	waterproof USB with Cable	1) IP67 2) Type: USB 3.0 3) Material of shield : PA6BG33 4) Degree: 180 5) Locking device, screw fastening 6) 1M USB cable Black
 SFS TB2-WP	Waterproof data connector	1) IP67 2) D type USB3.0 waterproof socket. 3) Material of shield : PA6BG33 4) This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SFS TB1-WP	Waterproof data connector	1) IP67 2) D type USB2.0 waterproof socket. 3) Material of shield : PA6BG33 4) Docking type, universal USB interface, plug and play.
 SUSB3-BJ2-WP	Waterproof data connector	1) IP67 2) D Type-C waterproof socket. 3) Material of shield : PA6BG33 4) D Type butt Type, universal type-c interface, plug and play.	 SUSB3-BJ1-WP	Waterproof data connector	1) IP67 2) D LC fiber optic waterproof socket. 3) Material of shield : PA6BG33 4) Butt-on, plug and play.
 STYPEC-BJ1-WP	Waterproof data connector	1) IP67 2) D type HDMI2.0 version waterproof socket. 3) Material of shield : PA6BG33 4) Butt-on, universal HDMI interface, plug and play.	 STYPEC-BJ2-WP	Waterproof data connector	1) IP67 2) D type RJ45 six kinds of waterproof socket. 3) Material of shield : PA6BG33 4) This type of socket: Shielded/ non-shielded optional, the default non-shielded.
 SHDMI-BJ1-WP	Waterproof data connector	1) IP67 2) D type USB3.0 waterproof socket. 3) Material of shield : PA6BG33 4) This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SHDMI-BJ2-WP	Waterproof data connector	1) IP67 2) D type RJ45 six kinds of waterproof socket. 3) Material of shield : PA6BG33 4) This type of socket: Shielded/ non-shielded optional, the default non-shielded.

Modules/Waterproof Box Electric Accessories

Product Picture/Item	Categories	Description	Product Picture/Item	Categories	Description
 SXHX-SP2X-M	Waterproof data connector	1)IP67 2)D type USB3.0 waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SHTX-XLR-M	Waterproof data connector	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.
 SHTX-XLR-WP-1M	Waterproof data connector	1)IP67 2)D type USB3.0 waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SWX-RJ45A-1M	Waterproof data connector	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.
 SWX-RJ45B-1M	Waterproof data connector	1)IP67 2)D type USB3.0 waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SXLRF-RJ45-1M	Waterproof data connector	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.
 SXLRM-RJ45-0.3M	Waterproof data connector	1)IP67 2)D type USB3.0 waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SHTX-309-1M	Waterproof data connector	1)IP67 2)D type USB2.0 waterproof socket. 3)Material of shield : PA6BG33 4)Docking type, universal USB interface, plug and play.
 SHTX-311-1M	Waterproof data connector	1)IP67 2)D Type-C waterproof socket. 3)Material of shield : PA6BG33 4)D Type butt Type, universal type-c interface, plug and play.	 SDYX-AC3-1M	Waterproof data connector	1)IP67 2)D LC fiber optic waterproof socket. 3)Material of shield : PA6BG33 4)Butt-on, plug and play.
 SDYX-AC3-WP-1M	Waterproof data connector	1)IP67 2)D type HDMI2.0 version waterproof socket. 3)Material of shield : PA6BG33 4)Butt-on, universal HDMI interface, plug and play.	 SDYX-AC3 FT-WP-1M	Waterproof data connector	1)IP65 2)D type RJ45 six kinds of waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.
 SYXX-405-1M	Waterproof data connector	1)IP67 2)D type USB3.0 waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.	 SYXX-402-1M	Waterproof data connector	1)IP67 2)D type RJ45 six kinds of waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.
 SYXX-403-1M	Waterproof data connector	1)IP67 2)D type USB3.0 waterproof socket. 3)Material of shield : PA6BG33 4)This type of socket: Shielded/ non-shielded optional, the default non-shielded.			


Waterproof Switch Socket



01 IP Protection

IP55 ~ 66

IP



Waterproof

Dustproof

02 More Switch socket



03 International

Similar Legrand Mosaic / Arteor series



45



86/146 type module socket

86



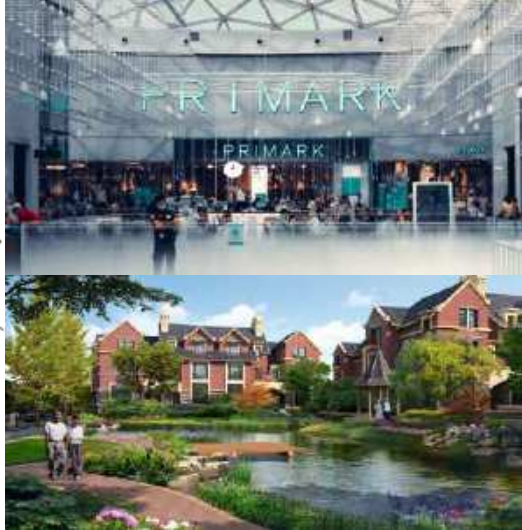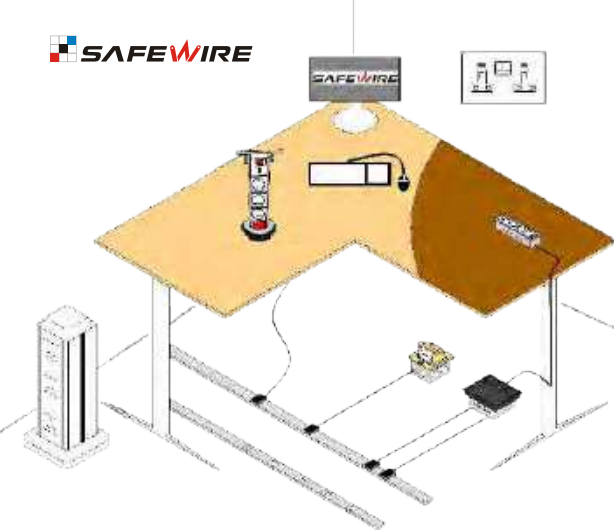

Feature


- ☒ Waterproof
- ☒ Dustproof
- ☒ UV-proof
- ☒ Strong Resistance



2. International & popular modules: 45×45mm modules or 86 type switch socket.


45 type module socket

45



86/146 type module socket

86



3. Empty box or 1/2/3/4 gang waterproof box with socket. It is up to you.



SA66-S



SA66-2S



SA66-SS



SA66-S2S



SA66-S3S

1. With BS1363-2, IEC60669-1:2017 IP66 Certificate.

@Q/ 141



IEC 60669-1




2. Ergonomic front cover/lid. Neck feature accommodates most plugs with bulky modulated strain relief.



3. RoHS Directive plastic quality materials.

RoHS

4. Safewire's Waterproof box Application in different system

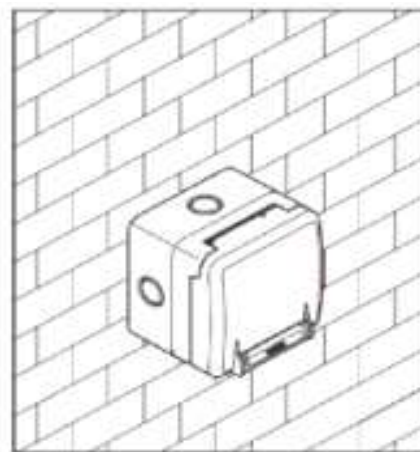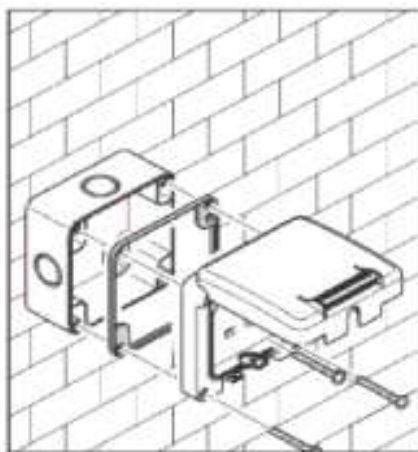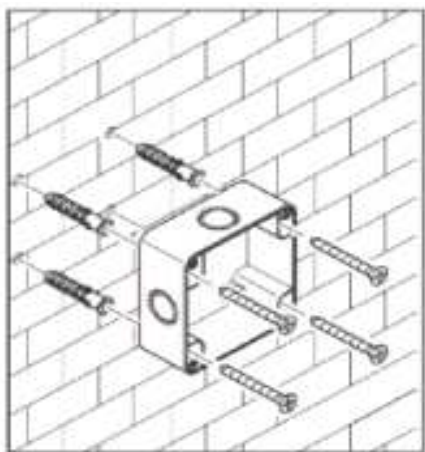

913SPF



923SPF



901ALF



SF-QB-202



SA66-S



SA66-S3S

1. Waterproof Sockets

1)A Verison



SF66-SR

Size	100*100*73
Specifications	one Eu socket



SF66-SRS

Size	100*200*73
Specifications	one Eu socket with switch



SF66-2SR

Size	200*100*73
Specifications	2 Eu socket



SF66-S2SR

Size	300*100*73
Specifications	2 Eu socket with switch

2)B Verison



SF66-S3SR

Size	400*100*73
Specifications	3 Eu socket with switch



SA66-S

Size	110*140*100
Specifications	one BS 13A socket



SA66-2S

Size	200*140*100
Specifications	2* BS 13A socket



SA66-SS

Size	100*240*100
Specifications	BS 13A socket with switch



SA66-S2S

Size	300*140*100
Specifications	2*BS 13A socket with switch



SA66-S3S

Size	400*140*100
Specifications	3*BS 13A socket with switch

2. IP55 Waterproof Box



SF-QB-200

Size	70*85*63
Specifications	1 way 22.5x45mm modules



SF-QB-200A

Size	70*84*68.5
Specifications	2 ways 22.5x45mm modules



SF-QB-201


Size	94*85*63
Specifications	3 ways 22.5x45mm modules



SF-QB-202

Size	118*85*63
Specifications	4 ways 22.5x45mm modules

Size	Ways	Matching product model	Size	Ways	Matching product model
45x22.5mm	1 ways	SF-QB-200	45x67.5mm	3 ways	SF-QB-201
45x45mm	2 ways	SF-QB-200A	45x90mm	4 ways	SF-QB-202

45x22.5mm	45x45mm									
										
F19B	F5	F6	F3A	F4	F10	F11	F15	F16	F18	F19



913SPF

Size	1 Gang 13A
Specifications	86x86 socket



923SPF

Size	2 Gang 13A
Specifications	86x146 socket



913SPF

Size	1 Gang 13A
Specifications	86x86 socket

IP66



923SPF

Size	2 Gang 13A
Specifications	86x146 socket



901ALF

Size	1 Gang switch
Specifications	waterproof box



902ALF

Size	2 gang switch
Specifications	Waterproof box



WP14

Size	20A*250V
Specifications	BS EN 60669-1 single pole



MP30

Size	20A D.P Switch
Specifications	Waterproof box

Isolating Switches




UKF Model


UKW Model

UKF Model

Cat.No.	Rating(Amps)	Designation	Wiring Diagram	IP Rating
UKF120	20A	Single Pole		IP66
UKF132	32A			
UKF145	45A			
UKF163	63A			
UKF220	20A	Double Pole		IP66
UKF232	32A			
UKF245	45A			
UKF263	63A			
UKF320	20A	Triple Pole		IP66
UKF332	32A			
UKF345	45A			
UKF363	63A			
UKF420	20A	Four Pole		IP66
UKF432	32A			
UKF445	45A			
UKF463	63A			

3. Single/Double/Twin switch socket for floor box

Product Picture/Item	Specification	Materials/Color	Product Picture/Item	Feature	Materials/Color
 HT-86SS	13A1 gang switched socket, single pole, 86x86mm dimension	PC White	 HT-146TS	13A 2g ang switched socket, single pole, 86x146mm dimension	PC White
 SCF-SSS	13A 2g ang switched socket, single pole for floor box	PC White	 SF-80-S-54	80*80mm Schuko/Euro socket	PC White
 SA-146WF	WIFI Duplex 2 gang switch socket	PC White	SCF-SSS product case 		
 SM-F21-2	Single gang bevelled faceplate with IP44 CE certificate pop up French socket	PC White	 SM-F21-1	Single gang flat faceplate with IP44 CE certificate pop up French socket	PC White
 SM-F22-1	Single gang flat faceplate with IP44 CE certificate pop up German socket	PC White	 SM-F22-2	Single gang bevelled faceplate with IP44 CE certificate pop up German socket	PC White

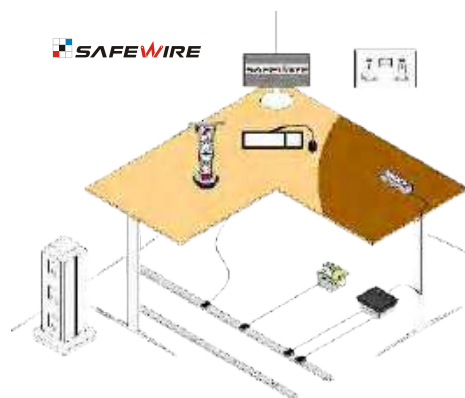

6.RCD Sockets

Feature

1.Full range BS1363 socket,SAA switch socket and GFCI outlets.

 BS1363 SOCKET					
					
 SAA SWITCH SOCKET					
GFCI outlets					

2.Plug with residual current operated circuit breaker, portable RCD adaptor,1/2 gangs socket-outlets,with/ without switches mechanical on/off indicator.

Socket-outlets



Plug with circuit breaker



Portable RCD adaptor



1. RCD Sockets

RCD0130FPW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS5733
Description	RCD Fuse spur unit PC clad

RCD0130PW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363 UKCA
Description	Single RCD plastic socket, unswitched

RCD0130SPW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363 UKCA
Description	Single RCD plastic socket, switch

RCD0230PW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363 UKCA
Description	Twin RCD plastic socket, unswitched

RCD0230SPW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363 UKCA
Description	Twin RCD plastic socket, unswitched

RCD0130SMG



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	with a metal box, with switch
Standard	CE BS7288 BS1363 UKCA
Description	Single RCD plastic socket, switch

RCD0130FMG



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	with a metal box
Standard	CE BS7288 BS1363
Description	RCD Fuse spur unit Metal clad

RCD0230SMG



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	with a metal box, with switch
Standard	CE BS7288 BS1363 UKCA
Description	Double RCD metal socket, switch

RCDZA30PW/B



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40ms
Material	PC
Standard	CE BS7288 BS1363 UKAS
Description	BS RCD Portable Adaptor (Passive/Active)

RCDZE30PW/B



Ratings	10A 240V
Rated trip current	30mA
Trip speed	less than 40ms
Material	PC
Standard	AS NZS3190&AS
Description	SAA RCD Portable Adaptor (Passive/Active)

RCD0230SPWA



Ratings	20A 240V
Rated trip current	30mA
Trip speed	less than 40ms
Material	PC
Standard	NZS3112&SAA
Description	Twin RCD Plastic socket with switch

RCDZA30PWA



Ratings	10A 240V
Rated trip current	30mA
Trip speed	less than 40ms
Material	PC
Standard	AS NZS3190&AS
Description	RCD Portable Adaptor (Active)

BG0106P-A



Ratings	15A 120V
Rated trip current	4~6mA
Trip speed	Less than 25ms
Material	PC
Standard	UI943 UL
Description	Portable Ground-Fault Circuit-Interrupters

L30PBA



Specifications	10A IN-LINE RCD
Connect	Single
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40ms
Material	PC

L30PBG




Specifications	16A IN-LINE RCD
Connect	Single
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40ms
Material	PC

BG0206S-A/B/C/D



Specifications	Ground-Fault Circuit -Interrupters(GFCI modules)
Connect	Double
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40ms
Material	PC

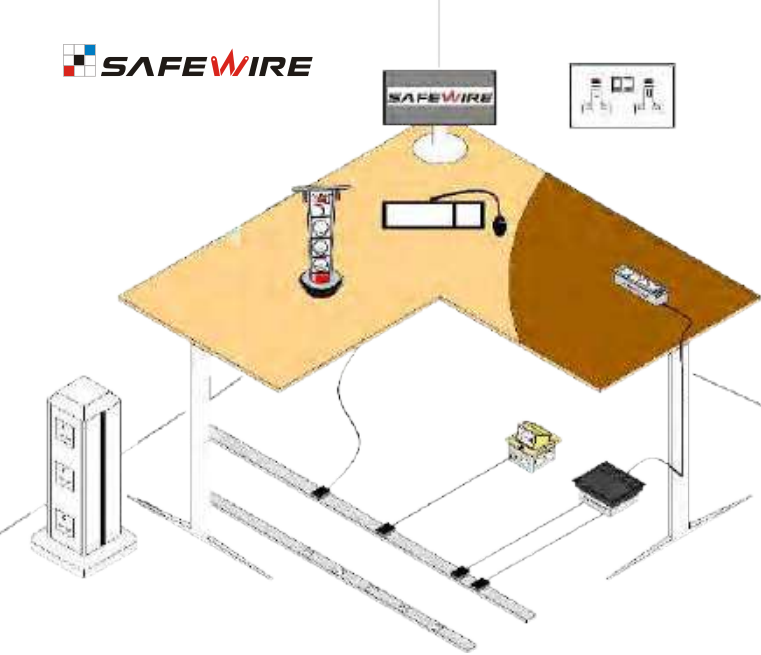


7.Splash Box

Feature

1.Applicable to popular 86,118 international type socket .



2.IP55 IP level and surface mounting with adhesive.

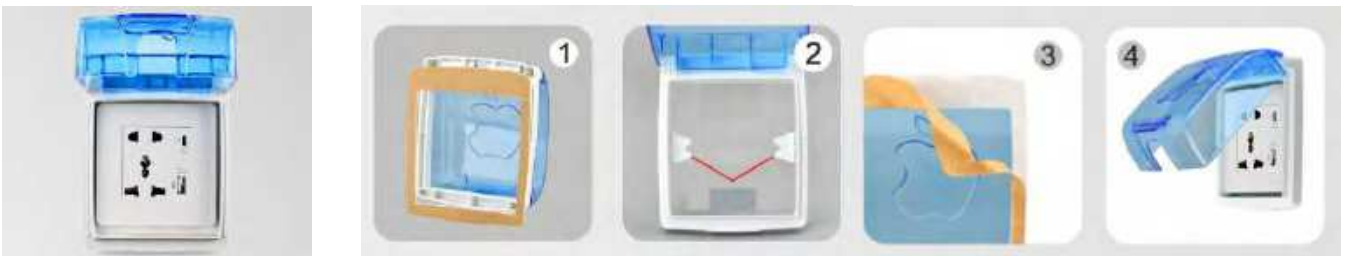

3.Design as automatically spring up & close up .



4.Compatiable with 6-point PVC conduit , easy installation.



1. Splash Box

GN-3



Material	ABS Plastic
Size	Triple size 86
Color	White

GN-22



Material	PS
Size	Double size 86
Color	Transparent

GN-32



Material	PS
Size	Triple size 86
Color	Transparent

SF-HM14-1



Material	ABS Plastic
Size	One size 86
Color	White

SF-HM14-5



Material	PS
Size	One size 86
Color	Black Transparent

ZT-21



Material	PS
Size	118 2way
Color	White Transparent



ZT-22



Material	PS
Size	118 2way
Color	Blue Transparent

ZT-32



Material	PS
Size	118 3way
Color	Blue Transparent



SF-HM09-MZ-ABS-W

Material	ABS Plastic
Size	One size 86
Color	White

SF-HM09-MZ-ABS-B

Material	PS
Size	One size 86
Color	Blue Transparent



SF-HM09-MZ-PS-W

Material	PS
Size	One size 86
Color	White Transparent



SF-HM09-MZ-ABS-Y

Material	PS
Size	One size 86
Color	Yellow Transparent



SF-HM02-F

Material	PVC
Size	One size 86
Color	White



SF-HM03-F

Material	PVC
Size	One size 86
Color	White



SF-HM04-F

Material	PVC
Size	One size 86
Color	White



SF-HM06-F

Material	PVC
Size	One size 86
Color	White



2. Cover plate C



SF-HM07-F

Material	PVC
Size	One size 86
Color	White



SF-HM17

Material	PP
Size	One size 86
Color	Brown



SF-HM19

Material	PS
Size	One size 86
Color	Transparent



SF-HM18-1

Material	ABS Plastic
Size	One size 86
Color	White



SF-HM18-2

Material	ABS Plastic
Size	One size 86
Color	Brown



SF-HM18-3

Material	ABS Plastic
Size	One size 86
Color	White



SF-HM18-4

Material	ABS Plastic
Size	One size 86
Color	Transparent



GN-2

Material	ABS Plastic
Size	Double size 86
Color	White

ZT-42



Material	PS
Size	118 4way
Color	blue

C-1-ABS



Material	ABS Plastic
Size	86*86mm
Color	White

C-2-ABS



Material	ABS Plastic
Size	86*86mm
Color	White

S1-W



Material	ABS
Size	Type 86 + Phone holder
Color	White



S1-G



Material	ABS
Size	Type 86 + Phone holder
Color	White

S1-B



Material	ABS
Size	Type 86 + Phone holder
Color	White

S2-W






Material	ABS
Size	Type 86 + 2Phone holder
Color	White

S2-G



Material	ABS
Size	Type 86 + 2Phone holder
Color	White

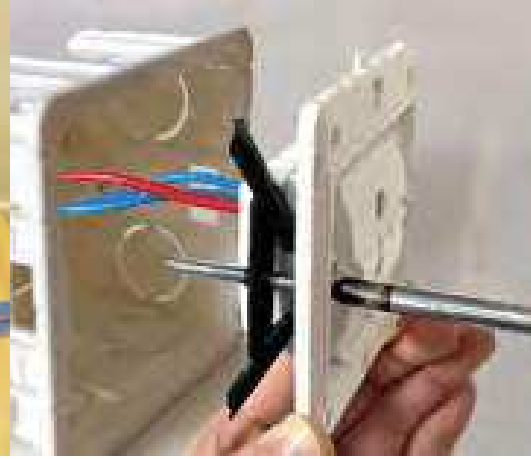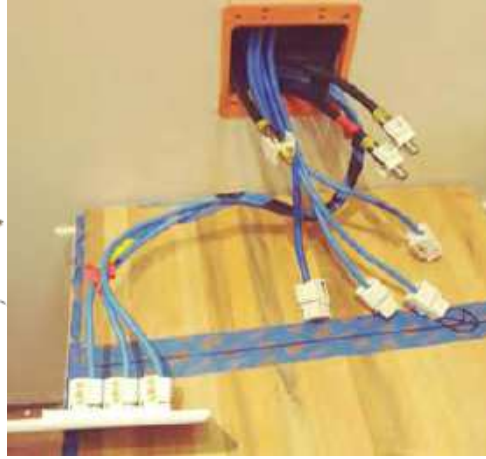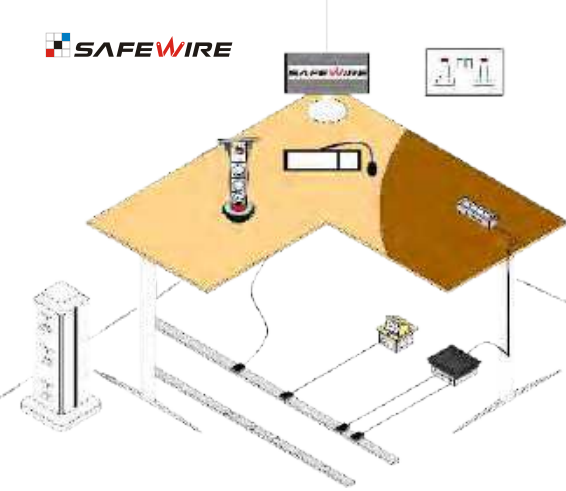

8.Frame,Box,Faceplate,Accessories

Feature

1.Supply with one-stop shopping of RJ45 network box & switch socket box .



J-NE-200

**LAN
BOX**



J-NE-54

**LAN
BOX**

BOX







B-8080101

BOX



B-8080073

2.Faceplate including 45X45 mm ,50X50 mm ,80X80 mm and 86X86 mm .

45x45mm	 F-8081106	 F-8075164	 F-8075163	 F-6117079	86x86mm	 F-8081028	 F-8081072
	 F-8081004	 F-8081003	 F-8081107			 F-8081028	 F-8081072
	 F-8081045	 F-8081044				 F-8081028	 F-8081072
50x50mm						 F-8081028	 F-8081072
80x80mm						 F-8081028	 F-8081072

1. Frame, Box, Faceplate, Accessories

Product Picture/Item	Description	Materials	Product Picture/Item	Description	Materials
 F-8081106	45*45mm Cable outlet mask	Polycarbonate	 F-8081035	45*45mm Cable outlet mask	Polycarbonate
 F-8075164	45*45mm faceplate for empty	Polycarbonate	 F-8075162	45*45mm faceplate for USB charger	Polycarbonate
 F-8075163	45*45mm faceplate for VGA	Polycarbonate	 F-6117080	Single gang bevelled faceplate for 45*45mm modules	Polycarbonate
 F-6117079	Single gang flat faceplate for 45*45mm modules	Polycarbonate	 F-8081036	50*50mm Single port Faceplate for HDMI	Polycarbonate
 F-8081002	50*50mm Dual port Faceplate for HDMI	Polycarbonate	 F-8081005	50*50mm Faceplate for HDMI and 1 RCA	Polycarbonate

2. Faceplate

Product Picture/Item	Description	Materials	Product Picture/Item	Description	Materials
 F-8081004	50*50mm Faceplate for HDMI and 2 RCA	Polycarbonate	 F-8081003	50*50mm Faceplate for HDMI and 3 RCA	Polycarbonate
 F-8081107	50*50mm Cable outlet mask	Polycarbonate	 F-8081044	80*80mm single gang bevelled Faceplate with frame	Polycarbonate
 F-8081045	80*80mm double gang flat Faceplate with frame	Polycarbonate	 F-8081204	80*80mm single gang flat Faceplate with frame	Polycarbonate
 F-8081028	86*86mm Single port for 25*50mm modules	Polycarbonate	 F-8081071	86*86mm flat single gang Single port for 50*50mm modules	Polycarbonate

Modules/Waterproof Box Electric Accessories

Product Picture/Item	Description	Materials	Product Picture/Item	Description	Materials
 F-8081072	86*146mm double gang Faceplate	Polycarbonate	 F-8081205	86*86mm flush-mounting bevelled plate with frame	Polycarbonate
 HB86M1-1/2	86*90mm Black/Gold/White color Single/Dual port Datafaceplate	Polycarbonate	 HB86M2	86*90mm Black/Gold/White color 1/2/3/4 port Datafaceplate	Polycarbonate

3. Plastic bottom box

Product Picture	Item	Catagories	Description	Color
	B-8080100	115*70*36mm box	Size:115*70*36mm bottom box, Height:36mm; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080101	115*70*47mm box	Size:115*70*36mm bottom box, Height:47mm; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080074	86*86mm box	Size:86*86*28mm indine 45 degree bottom box, Height:73mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/ white
	B-8080073	86*146mm box	Size:86*146*73mm indine 45 degree bottom box, Height:73mm; For 146 double gang type modules; Thickened bottom box: Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white

Modules/Waterproof Box Electric Accessories

4. Frame support

Product Picture	Item	Catagories	Description	Color
	SAF-01	75x75mm	2 ways 45x45mm modules frame	Black
	SAF-02	145x74mm	5 ways 45x45mm modules frame	Black
	SAF-1A	60x75mm	2 ways 45x45mm modules frame	Black

5. Accessory plates for compartment series floor junction box

S/N	Stainless steel box	Floorbox with stainless steel box for concrete floor	Specification
1	B-H622-C For HTD-622	 	Stainless steel bottom box for concrete floor, 140*180*128mm.
2	B-H624-C For HTD-624	 	Stainless steel bottom box for concrete floor, 220*252*128mm.
3	B-H628-C For HTD-628	 	Stainless steel bottom box for concrete floor: 316*218*108mm.

Modules/Waterproof Box Electric Accessories

S/N	Model	Product Pictures	Specification
1	SAP01		duplex switch socket of BS 13A (Dimension:250 X 77mm)
2	SAP02		4 ways Internet data such as telephone and computer(Dimension:250 X 77mm)
3	SAP03		Accessory plate for compartment plate without cutout(Dimension:250 X 77mm)
4	SAP024		4*Data/telecom plate (37*22mm cut-outs)
5	SAP025		6* Data/telecoms plate (37mm X 22mm cut-outs)
6	SAP026		Punched plate for 2*1 gang accessories (60-3mm fixing centres)
7	SAP027		4*Euro, 45*67.5MM module 45*67.5mm cut-outs
8	SAP028		Punched plate for 2 gang accessories (120-6mm fixing centres)
9	SAP030		Punched plate for 2*2 gang accessories 120-6mm+120-6mm fixing centres
10	SAP031		2*86 switch socket + 1*146 switch socket 2*86mm+1*146mm cut-outs
11	SAP032		4*86*86mm switch socket 86*86mm cut-outs

Modules/Waterproof Box Electric Accessories

S/N	Model	Product Pictures	Specification
12	SAP033		1* Circuit breaker, 86mm;
13	SAP040		4* Network module for 4 compartment, 58mm,
14	SAP041		Duplex switch socket of BS 13A, 4 compartment, 77mm;
15	SAP050		Duplex switch socket of BS 13A, 3 compartment horizontal installation, 86mm;
16	SAP051		Duplex switch socket of BS 13A, 3 compartment, Side mounting; 86mm
17	SAP070		3* Euro telephone/Data power socket 45*45mm cut-outs
18	SADF01		1* 86*86mm switch socket 86*86mm cut-outs
19	SAPJ01		6 way 45 modules

■ Frame & Faceplate & Bottom

1 Metal bottom box



HTD-120JH
120x120x60mm



B-H622-C
For HTD-622



HTD-200JH
100x200x55mm



SLB-86-03
86*86mm modules

6. Optional RCD

Aluminum alloy 86 wire drawing panel



S601




S602



S603



S604



S605



S606




S607



S608



S609



S610



SDVI-1



SDVI-2



S601-A



S602-A



S603-A



S604-A



S605-A



S606-A



S607-A



S608-A



S609-A



S610-A



SDVI-1A



SDVI-2A

Stainless steel 86 panel



S601-T



S602-T



S603-T




S604-T



SDC-145A



SDC-145B

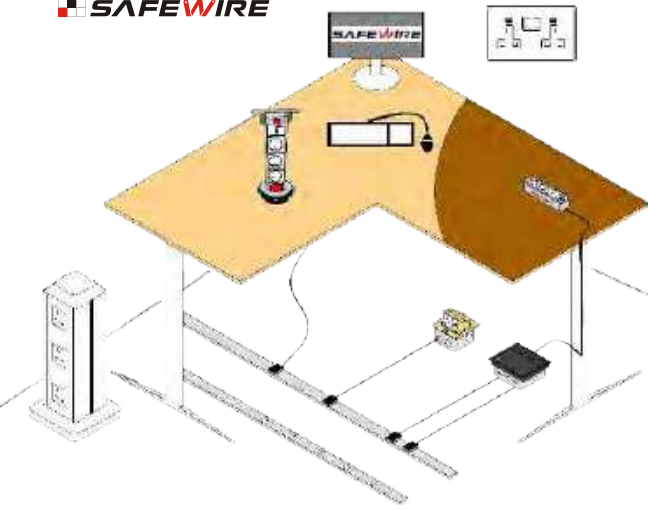

8. Remote control lights & random stickers

Feature

1.Voice control lamp cap close & open,
Just say :lights on!lights off!



2.Fast installation & compatible with multiple LED
bulbs.




1. Wireless remote control paste anywhere, through the wall controllable, respon.



2.Easy connection, safe material.



3.A variety of combination control: multi control one, one control more.

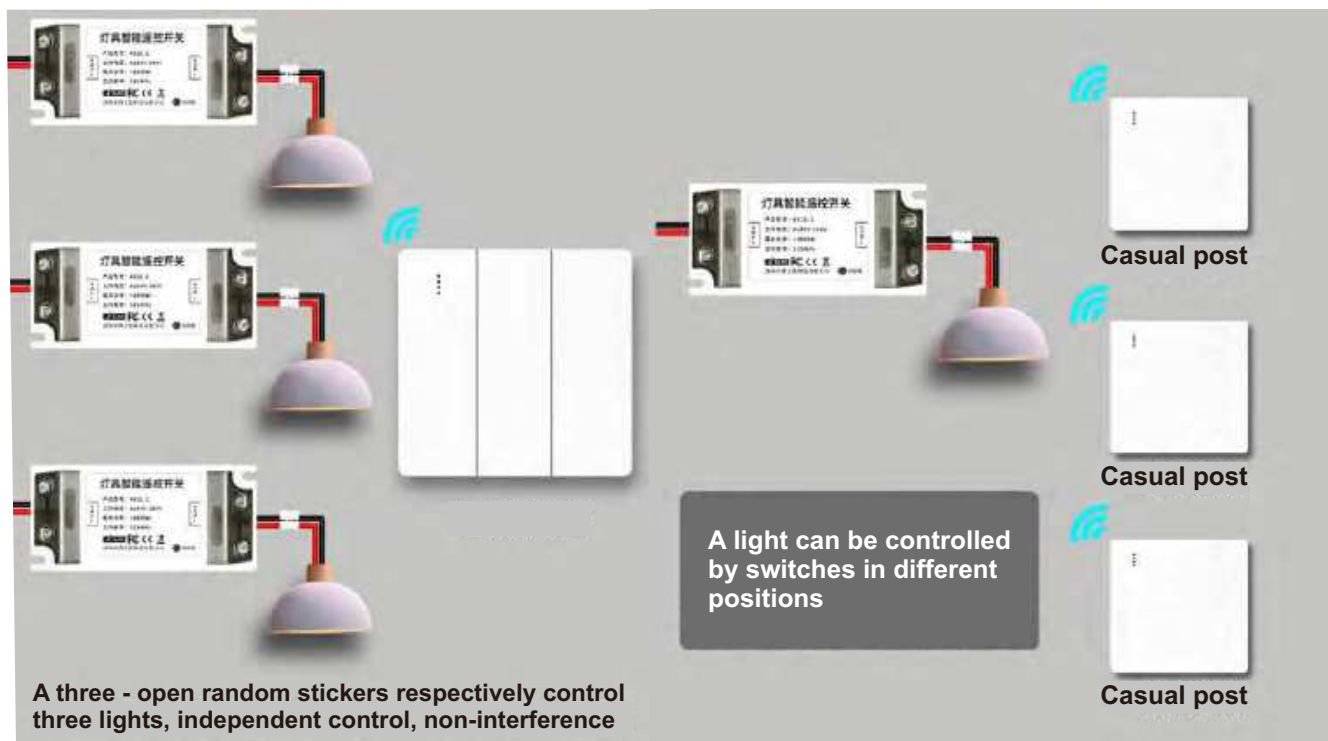

Specification

A)Product Dimension:



B)Receiver basic parameters and wiring:



