



Wenzhou Safewire Electric Co.,Ltd.
No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;
www.safewirele.com

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Desktop socket

PRODUCT No. : FZ-527



FZ-527

ADD: 152 xingguang industrial zone, yueqing city, zhejiang province
(TEL) :0086-577-62799688
(E-mail): info@safewirele.com
(WEB): <http://www.safewirele.com>



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com

Technical parameters & characteristic :

1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A

2) Characteristic:

1	Model	HTD-527	6	HS Code	8536690000
2	Brand Name	Safewire or OEM brand	7	Market standard	Customized
3	Type	floor socket	8	Place of origin	Zhejiang , Wenzhou, China
4	Color	Golden, silver	9	Frequency	50Hz~60Hz
5	Grounding	Standard grounding	10	Current Type	AC

3) Technical parameters :

Serial No.	Parameter	Description
1	Material	Aluminum 6063, PC zinc alloy
2	Panel Material	Stainless/Brass
3	Surface finish	Painted/Oxygenated
4	Panel Dimension(mm)	124
5	Cutout(mm)	φ102
6	Dimension of product(mm)	650
7	Capacity of modules /Interface size	6 ways 45*45mm modules
8	Configuration	Power outlet+Data outlet or USB charging : Customized as required
9	Cable length	1.5m, 2m,3m or required length
10	Available modules	45*45mm Type series




Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com

Application :

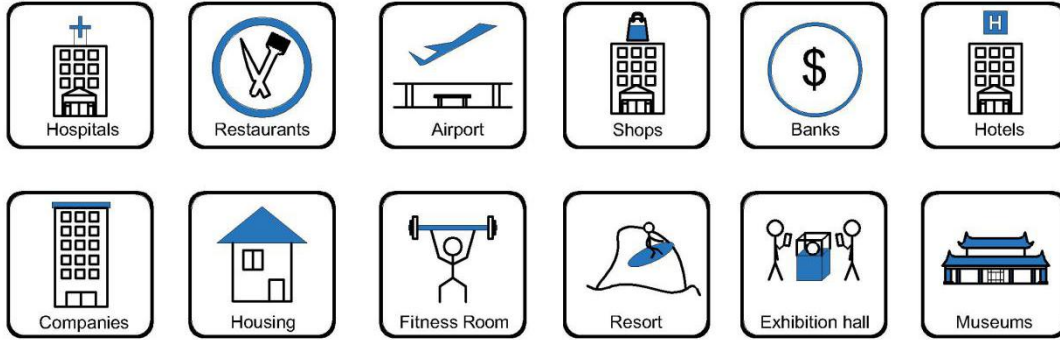

- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

Product Show:





Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
 Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com

Features:

- 1) Upside-down installation possible.Connection is simple and made on the pop up socket in upper position . The unit is then hidden under the desktop, enabling the modules to come out push& pull the opening.
- 2) The opening mode is pneumatic.
- 3) Enables the connection of 6 modules.
- 4) Suitably installed into 100mm grommet hole.
- 5) Casting made from aluminum and solid plastic.
- 6) Suitable for desk tops up to 50mm;
- 7) Coming with hardwired starter-or interlink cable. Also available with 2.5mm internal wiring.


available for 45*45mm type international sockets or modules types:

SAFEWIRE

45 Type Function Accessories

2 pin socket	3 pin 10A socket	3 pin multi function	BS socket	EU socket	French socket	USA socket				
F2	F3	F4	F11	F15	F16	F18				
RJ45/Cat.6 data/TEL socket	TV socket	BNC socket	3.5 earphone socket	DIN(eight pins)	Audio socket	Vedio socket	Stereo socket	USB		
F20/F21/F22/F23/F25/F28	F50	F51	F52	F53	F55	F56	F58	F59		
Cannon socket	Speaker socket	15 pins VGA (pin /hole type) / Spine VGA(pin / hole type)	HD TV socket	S-terminal						
F60	F62	F65/F66/F67/F68	F68	F71						

FZ-527 Outline drawing:


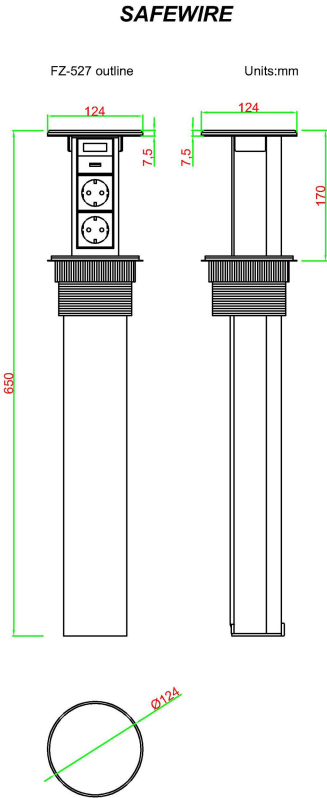


Package:8 Pcs inner box into a master carton.Poly bag with box packing

SafeWire

Package solution



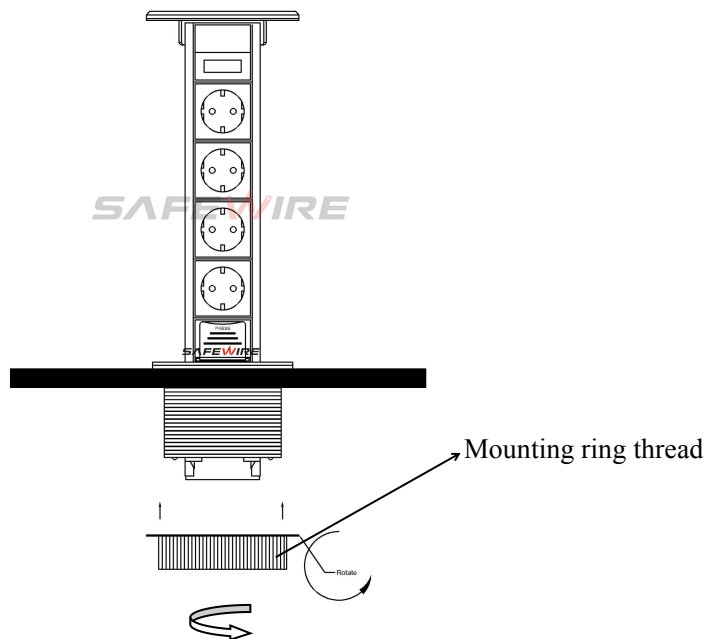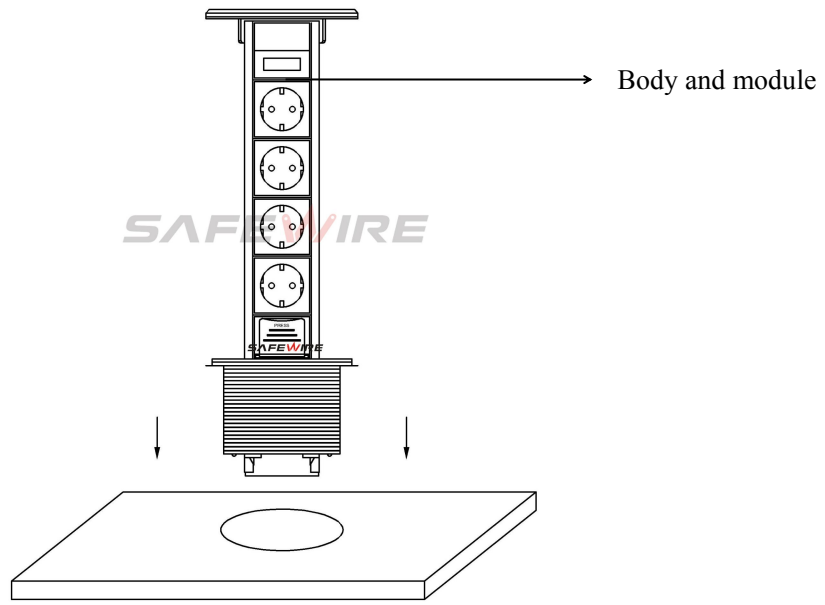



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com

Installation Process

1. Cut out ϕ 100mm.
2. Rotate the mounting ring thread first and remove it.
3. Put the product into the opened hole.
4. Rotate and tighten the mounting ring thread and secure the product to the table.

Attentions:

- 1.Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.
2. All dimension quoted are nominal only. Drawings , images and text are for illustrative perposes only and product details and dimension are subject to change without notice.

Safety Warning:

- 1)This is a class I product and must be earthed.
- 2)This product must be installed/wired by a qualified electrician.
- 3)before installation/maintnace ,ensure the mains supply is switched off and the circuit fuses are removed or circuit breakers switch off.
- 4)For indoor use only.