

2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com


Wenzhou Safewire Electric CO., Ltd.

SPECIFICATION SHEET

PRODUCT NAME: US 15A socket

PRODUCT No. : F2C





ADD: 2nd floor, Wealth Garden, Liushi Town, Yueqing city, Wenzhou, Zhejiang, China

(TEL):0086-577--61725369
(E-mail): info@safewirele.com
(WEB): http://www.safewirele.com



 $2^{nd}\ floor,\ Wealth\ Garden,\ Liushi\ Town,\ Yueqing\ city,\ Wenzhou,\ Zhejiang,\ China\\ Tel:0086-577-61725369;\ Email:info@safewirele.com;$

www.safewirele.com

Characteristic:

| Serial No. | Parameter | Description |
|------------|-------------------------|------------------------|
| 1 | Panel Material | PC 94-V0 |
| 2 | Inside material | Tin phosphorous bronze |
| 3 | Surface finish | Glossy |
| 4 | Input voltage | 250v/AC 50~60Hz |
| 5 | Rated current | 15A |
| 7 | 2 pin Withdrawal force | 2N-18N |
| 8 | Durability | ≥5000 |
| 9 | Color | customization |
| 10 | Number of terminals | 2 screw terminals |
| 11 | Outlet | US sockets |
| 12 | IK degree of protection | IK04 |
| 13 | IP degree of protection | IP21 |
| 14 | Dimension of product | 22.5*45mm |

Environmental requirements


| Serial No. | Parameter | Description |
|------------|------------------------|-----------------------|
| 1 | Operating temperature | -10°C~+40°C;Operating |
| 2 | humidity | 20%~90% RH |
| 3 | Storage temperature | -20°C~+85°C;storage |
| 4 | humidity | 10%~95% RH |
| 5 | Resistance to pressure | ≥3Kv/AC 1min |
| 6 | Isolation resistance | 500v DC/100MΩ |



Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China
Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com

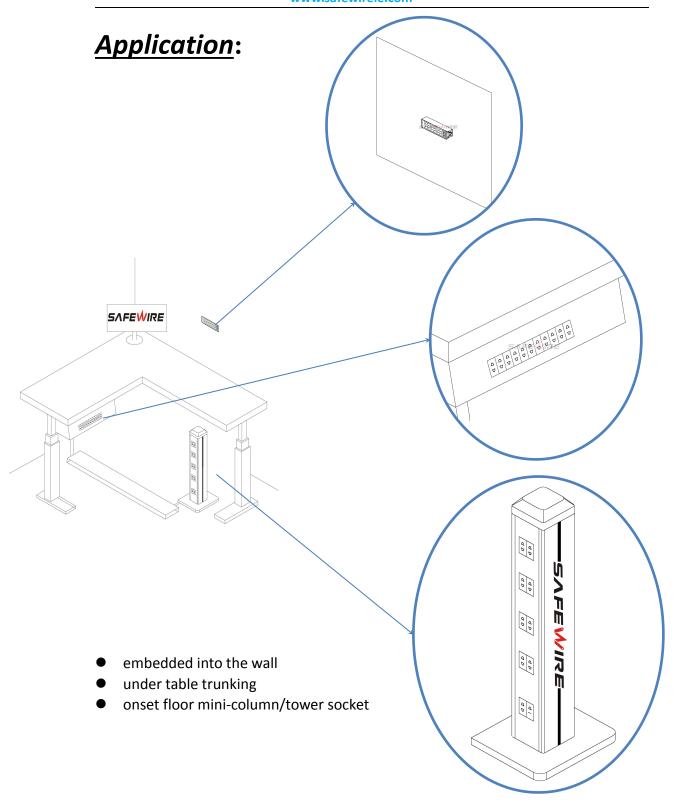




2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com

Feature:







- 1.5...2.5mm² for stranded cable (s)
- 1.5...2.5 mm^2 for flexible cable (s)
- 1.5...2.5mm² for rigid cable (s)







insulation resistance tester

dielectric strength tester

Current tester



2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com

- 1. toolless installation
- 2. Single, double, triple, multi-socket using the connection block
- 3. With optional safety key
- 4. With red ,green ,white finish for UPS ,health sector or specific power supply.

Package: 20 Pcs connector in poly bag separately with inner box. 10pcs inner boxes in one carton box







2nd floor, Wealth Garden, Liushi Town, Yueqing city,Wenzhou,Zhejiang,China Tel:0086-577-61725369; Email:info@safewirele.com;

www.safewirele.com

F2C Outline drawing:





Installation Process

- 1. Insert the connection block in the contacts of the socket
- 2. Easy to install: Pre-assembled system product need only a screwdriver to have their cables connected and to fit them on the boxes-just a few seconds work for an

incredible long-last installation.

4.Safety Warning:

- 1. For indoor use only.
- 2. This product must be installed/wired by a qualified electrician.

5.Attentions:

- 1. Protect children from touch skirt of socket.
- 2. Ensure current and voltage as rating current/voltage . Do not overload
- 3. Prevent from corrosive liquid, gas (strong acid, strong alkali, paint) and humidity.