

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Pop up floor socket

PRODUCT No. : FD-201



ADD: 152 xinguang industrial zone, yueqing city, zhejiang province

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



Technical parameters & characteristic :


1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A


2) Technical parameters :

Serial No.	Parameter	Description
1	Panel Material	Brass alloy/Alu alloy
2	Surface finish	Wire drawing/Polishing/Spray painting
3	Panel Dimension(mm)	118*120
4	Cutout(mm)	105x105
5	Capacity of modules	3 ways modules
6	Bracket material	Zinc Alloy & Alu Alloy
7	Sink box Material	Steel+Zinc plated
8	Sink box Thickness:	1.2mm
9	Available modules:	45*45/45*22.5(mm)
10	Damping device (DP):	Normal Pop-up & Soft Pop-up available

Application:

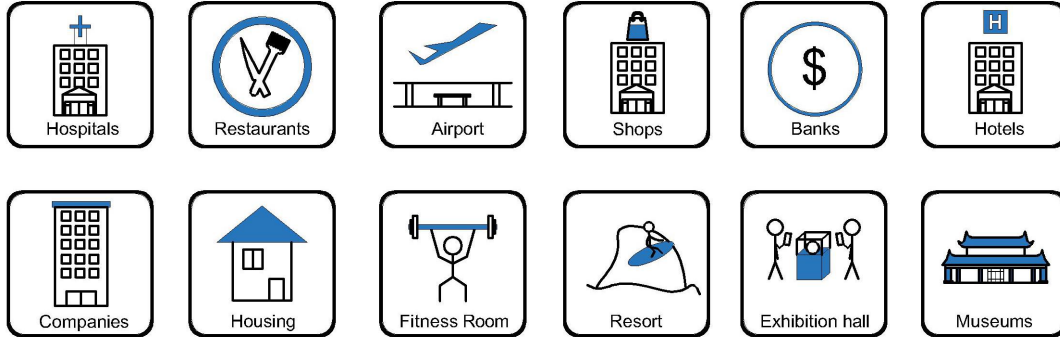

- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

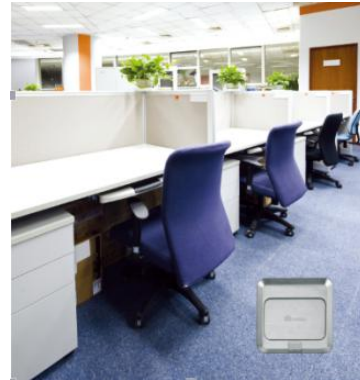

CE certificate by TUV,Germany



LVD test report

TEST REPORT	
Report No.:	50202399 001
Applicant's name:	Felifu Technology Co., Ltd.
Applicant's address:	No. 18, Chunhui Middle Road, Yongnan Industrial Zone, Xianju County, Taizhou City, Zhejiang Province, China
Sample description:	Empty Enclosure (Box for Electrical Accessories-Floor Box)
Model:	HTD-1, HTD-4L, HTD-101, HTD-101P, HTD-102, HTD-102P, HTD-103R2R, HTD-120K, HTD-120KP, HTD-140FK, HTD-140FKP, HTD-148K, HTD-148KP, HTD-16, HTD-16L, HTD-1602, HTD-1602L, HTD-17X, HTD-17XL, HTD-18, HTD-18L, HTD-180K, HTD-180KP, HTD-2, HTD-2P, HTD-210CK, HTD-210CKP, HTD-26, HTD-26L, HTD-28, HTD-28L, HTD-3, HTD-3P, HTD-36, HTD-40, HTD-71, HTD-71L, HTD-140YK, HTD-140YKP, FD221, FD666-TL/BI/H1, FD777-T/RF/H1
Date of receipt of test item:	Refer to cover page
Test location:	Room 02, The 2nd floor No.201, GRG Technological Building, 163 Ping Yun Rd, Tianhe District, Guangzhou, China
Test standard:	EN 60670-23:2008 in conjunction with EN 60670-1:2005
Test date(s):	Refer to cover page
Test result:	The test results are in compliance with the above mentioned standards.
Date of issue:	Refer to cover page
Other aspects:	/
N/A	
Abbreviations:	P = passed; F = failed; N/A = not applicable

Product Show:



Brass color



Silver color



Bottom box

Features:

1. Fast-wiring: more terminal block for 1~2.5m² rigid wire or 0.5~6m² prepared flexible wire.
2. Reliable push button: >5000 times.

Available for F type 45*45mm type or D type 22.5*45mm international sockets or modules types:

SAFEWIRE

45 Type Function Accessories

F2	F3	FA	F11	F12	F16	F18			
F24/F25/F26/F27/F28	F29	F30	F31	F32	F33	F36	F38	F39	
F40	F42	F43/F44/F45/F46	F48	F71					



SAFEWIRE



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

FD-201 Outline drawing:

FD-201 outline

Units:mm

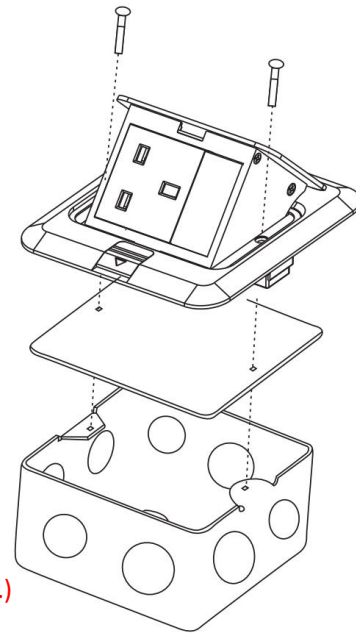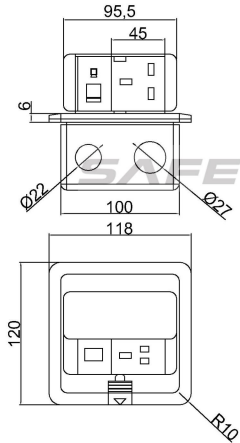

(Image is for reference only.)

Package:20 Pcs inner box into a master carton.Poly bag with box packing.

SafeWire


Package solution




www.safewirele.com

Installation Guide


1. Cut out size : 105*105mm.Install the bottom box with panel into the specified location.
2. Screw mounting frame and panel(for desktop only).
3. Fix the panel and bottom box with screws(This item is for ground installation only).
4. ADjust the tightness of all wiring lines (no influence on opening).




(1)

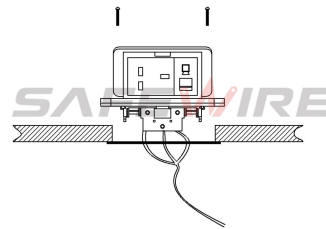

(2)

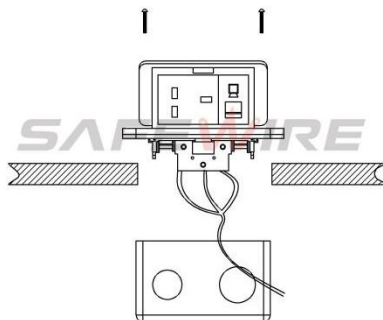

(3)

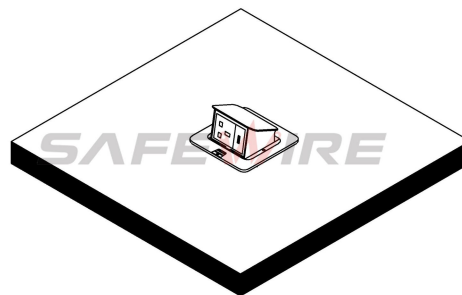

(4)

Attentions:

- 1.Dispose of trash in bottom box and prevent dirt and debris from entering inside.
- 2.Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.
- 3.When installing, pay attention to the opening direction,the length of the conductor to the bottom box shall not exceed 10cm,Set aside at least 200mm of cable.
4. All dimension quoted are nominal only. Drawings , images and text are for illustrative perposes only and product details and dimension are subject to change without notice.
- 5.Make sure that the sealing under plate will be jointed tightly with the earth's surface,avoiding seepage



SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

Safety Warning:

- 1.This is a class I product and must be earthed
- 2.This product must be installed/wired by a qualified electrician
- 3.For indoor use only.
- 4.For concrete floor.