

Wenzhou Safewire Electric CO., Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Cabinet PDU

PRODUCT No. : SFGLC-3



Tel:0086-577-61725369; Mob:0086-18612380398; ZIP:325604

(E-mail): info@safewirele.com

(WEB): <http://www.safewirele.com>



Wenzhou Safewire Electric Co.,Ltd.

2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou, China, 325604

Technical parameters & characteristic :

1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A

2) Characteristic:



1	Model	FZ-502	6	HS Code	8536690000
2	Brand Name	Safewire or OEM brand	7	Market standard	Customized
3	Type	Cabinet flush-mounting	8	Place of origin	Zhejiang , Wenzhou, China
4	Color	Silver/black/white	9	Frequency	50Hz~60Hz
5	Grounding	Standard grounding	10	Current Type	AC

3) Technical parameters :

Serial No.	Parameter	Description
1	Panel Material	Aluminum alloy
2	Outlet	3 * Power socket
3	Capacity of modules /Interface size	6 ways (45*45mm)modules
4	Configuration	3 Power socket/USB charger
5	Available modules	45mm modules

Application:

Wall Flush-mounting on cabinet of kitchen, power supply for home-appliance and lighting on/off switch.

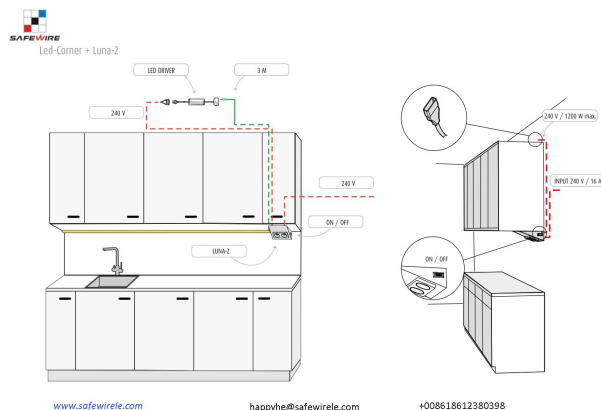


INPUT
240 V
Max 16 A

OUTPUT, 240 V
Max 5A

happyhe@safewirele.com +008618612380398

-----www.safewirele.com-----

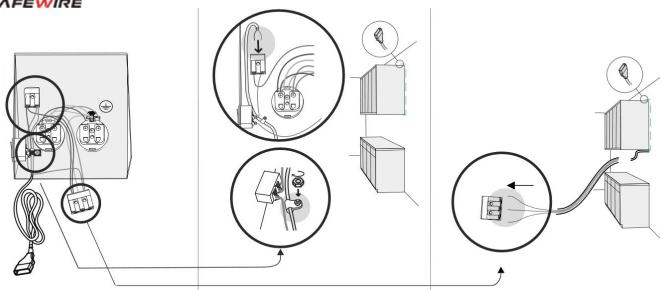

www.safewirele.com

happyhe@safewirele.com

+008618612380398

Product Show:



Front Review



Side Review



Features:






















Safewire's Wall Flush-mounting aluminum profile SFGLC-3 is application with electric on cabinet of kitchen, power supply for home-appliance and lighting on/off switch .Four power outlet sockets or 3 power socket with 1 USB charger modules.

- 1).Aluminum profile material surface finished .
- 2).Flush-mounting on cabinet and power supply for home-appliance and lighting control.
- 3).Length and configuration is customization.
- 4). Available for Safewire's 45*45mm international socket and network modules.

available for 45*45mm type international sockets or modules types:

SAFEWIRE


45 Type Function Accessories

						
F2	F3	F4	F11	F15	F16	F18
						
F20	F21	F22	F23	F24	F25	F26
						
F27	F28	F29	F30	F31	F32	F33

Package:2 Pcs inner box into a master carton.Poly bag with box packing.

SafeWire

Package solution

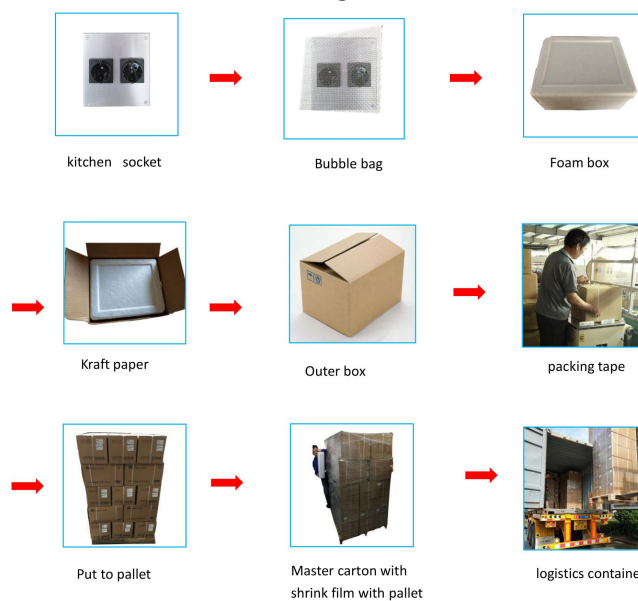

www.safewirele.com



Installation Process

1. screw and fix the bottom box.
2. Fixing socket modules. Assembly the socket or data Jack into the plastic frame and press frame ensure them combine tightly.
3. Keep socket modules connected by inner wire (it should be copper core 1.5mm²9~20 wire and length should be suitable). Then earthing and ensure inner wire tightly with modules.

Attentions:

1. Prevent from corrosive liquid, gas (strong acid, strong alkali, paint) and humidity.
2. All dimension quoted are nominal only. Drawings, images and text are for illustrative purposes only and product details and dimension are subject to change without notice.

Safety Warning:

- 1) This is a class I product and must be earthed
- 2) This product must be installed/wired by a qualified electrician
- 3) before installation/maintenance, ensure the mains supply is switched off and the circuit fuses are removed or circuit breakers switch off
- 4) For indoor use only

RoHS Certificate of Compliance: Conforms with the Directive 2002/95/EC (ROHS)