

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Desktop socket

PRODUCT No. : FZ-VL-001



Address:2nd floor, Wealth Garden, Liushi town, Yueqing, Wenzhou,China ,325604

Tel:0086-577-61725369

Mob:0086-18612380398

ZIP:325604

(E-mail): info@safewirele.com

(WEB): <http://www.safewirele.com>

Tel:0086-577-61725369;


Email:info@safewirele.com;

<http://www.safewirele.com>

Quick Details:

Serial No.	Parameter	Description
1	Safewire item	FZ-VL-001
2	Material	Aluminum 6063, PC zinc alloy
3	Surface finish	Painted/Oxygenated
4	Panel Dimension(mm)	φ136
5	Cutout(mm)	φ100
6	Dimension of product(mm)	457
7	Capacity of modules /Interface size	16 ways 45*45mm modules
8	Configuration	wireless charger & USB motorised pop up with USB/bluetooth/outlets
9	Cable length	1.5m, 2m, 3m or required length
10	Available modules	45*45mm Type series

Application:

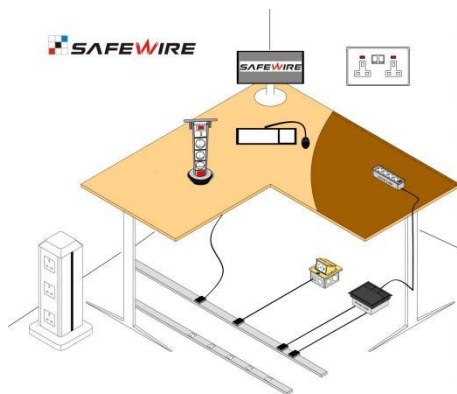

1.Feature of Safewire Cylindrical socket:

1.IP44 Level protector shutter socket



2.45 degree socket, more easy plug into unites.

Tel:0086-577-61725369;

Email:info@safewirele.com;

<http://www.safewirele.com>



3. Optional motorised pop up with bluetooth/USB and wireless charge etc.



FZ-VL-001



FZ-527E/W




FZ-527E/U

2. Advantage of Safewire Cylindrical socket :

1. Modular design for configuration of power supply and communication of 45x45mm modules.



2. More optional ϕ 80mm, ϕ 100, ϕ 124mm for grommet hole in furniture.

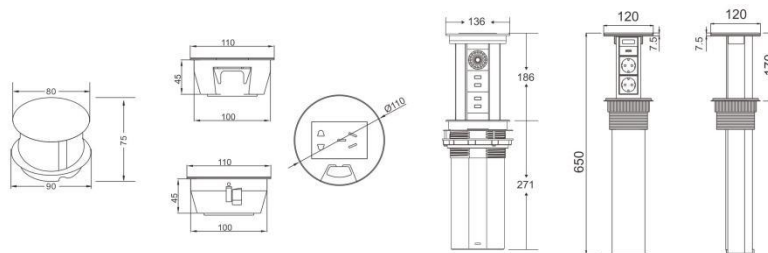

3. Anodised EV1 Aluminum Brushing wire drawing or black powder-coated housing.



FZ-VL-001



FZ-527E/U




FZ-527B

3.Specification of Safewire Cylindrical socket:

A)Product dimension:

FZ-VL-001 Units:mm



B)Available 45×45mm modules/socket/accessories:



C) Safewire Cylindrical socket application in different system:



FZ-VL-001



FZ-527E/W



FZ-526-8



FZ-502W



FZ-502B



SFGS811-WL

E)Safewire optional of economical package :



Access cylindrical socket



Cylindrical socket
with paper box



Boxes with kraft paper



Socket with kraft paper




Packing PP belt
product outer box



Put to pallet

Installation diagram

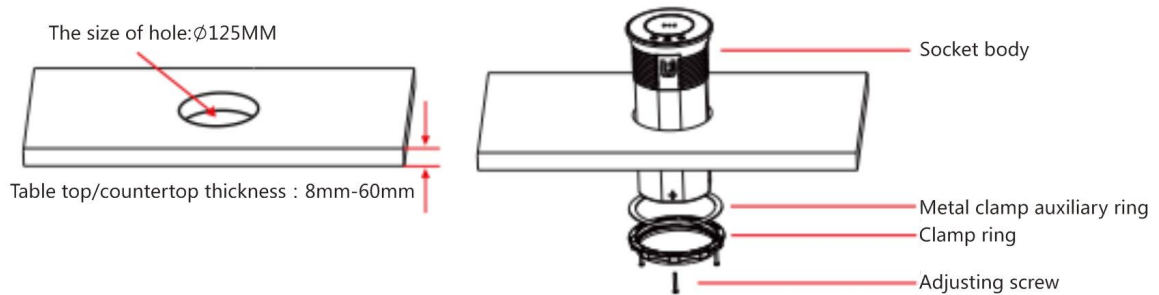

Installation steps description:

1. Open holes according to required dimensions
2. Load the socket body from above
3. Mount the metal compression auxiliary ring from the lower end
4. Mount the locking ring from the bottom
5. Adjust the length of three screws on the locking ring according to actual installation requirements

