




Accessories





01 More Categories





Modules




Panels



Frames



Bottom boxes



02 Customization



Material



Size



Parts



Colour



Configuration




Packing

Different solutions can be customized for smart home, network wiring and electrician customers;

03 International

Similar Legrand Mosaic / Arteur series

45



Similar Panasonic 128 type series

128



86/146 type module socket

86



5V 4.2A USB charger, HDMI, Cat6, RCA, and so on




45×45mm Module as Specification Legrand's Mosaic/Arteor Series



Floor Socket


Desktop Socket

"Snap-in" design:



Distribution Box

More optional color:



Waterproof Box

Easy-Wiring:



Accessories

Floor Socket

■ 45*45mm NEMA socket for ASEAN

45*45 & 45 *22.5mm NEMA socket



F18 (45*45mm) F1(45*22.5mm)

HTD- 14 with optional 45*45mm modules & 128 panasonics modules



HTD-13 HTD-13 HTD-13 HTD-13(128 type socket)

Pop up socket



FD-201L HTD-2602L HTD-2602B


Pull Out Box with hinge



HTD- 120K HTD-146K HTD-145CKP HTD-130LK


■ 45*45mm pop up French socket

French socket

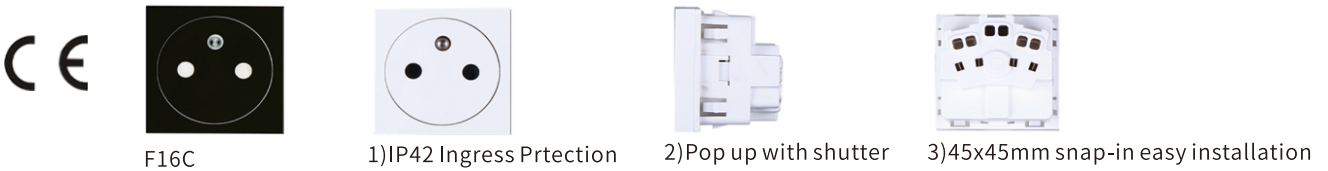

F16C 1)IP42 Ingress Prtection 2)Pop up with shutter 3)45x45mm snap-in easy installation

Application in wall-mounting switch

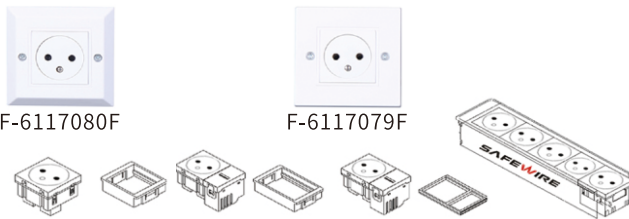

F-6117080F F-6117079F

Application in floor box



FD-201L HTD-102P HTD-120K

Application in desk socket



FZ-517S FZ-TB-W FZ-561 FZ-526-6





















FMD Series Desktop Socket

Distribution Box

Waterproof Box











Accessories

2. Accessories **2.1 Modules & socket & connector**
2.1.1 45*45mm Power Socket Match Legrand's ' Mosaic/Arteor Support

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F1	22.5x45mm	Europeab-American socket, Brazil NEMA5-15R & CEE 7-16 Outlet 16A-250V & 15A-127V, 2P+E	white/black	 F2	22.5x45mm	2 pin socket, 10A, 250V; 2P	white/black
 F2B	45 × 22.5MM	US 16A multi-function socket	white/black	 F2C	45 × 22.5MM	US 15A socket	white/black
 F3A	45x45mm	3 pin 16A,220V;Australia & New Zealand AS/NZS 3112Outlet 15Amp 250V	white/black	 F3B	45x45mm	3 pin 10A,220V;Australia & New Zealand AS/NZS 3112 Outlet 10Amp 250V	white/black
 F3C	45x45mm	3 pin 15A,220V;Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V,with SAA certificate	white/black	 F3D	45x45mm	3 pin 10A,220V;Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V,with SAA certificate	white/black
 F4	45x45mm	International Multi-configuration Outlet 13A~250V & 15A-127V of 90 degree angle, 10A, 250V;2P+E	white/black	 F5	45x22.5mm	Switzerland SEV 1011 Type 13 Outlet, 10A, 250V;2P+E	white/black
 F6	45x22.5mm	Italy & Chile CEI16/VII Outlet 10Amp 250V;2P+E	white/black	 F10	45x45mm	Israel socket, 16A, 250V	white
 F11	45x45mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V ,90 degree;2P+E	white/black	 F11B	45x45mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V , 45 degree;2P+E	white/black
 F15	45x45mm	European socket(Schuko), 16A, 250V , Angle 0 degree or 90 degree, 2P+E with shutter socket,screw terminals;2P+E	white/black	 F15B	45x45mm	European socket(Schuko), 16A, 250V , Angle 45 degree , 2P+E with shutter socket,screw terminals;	white/black
 F16	45x45mm	French Socket,16A,250V;2P+E;	white/black	 F16B	45x45mm	French Socket,16A,250V,Angle 45 degree , screwless terminals;2P+E	white/black
 F16C	45x45mm	Ip44 French Socket,16A,250V, screwless terminals;2P+E; With pop up mechanism protector shutter, 4 side snap-in clip into support.	white/black	 F18	45x45mm	Brazil NEMA5-15R & CEE 7-16 Outlet 16A-250V & 15A-127V	white/black

Floor Socket
 Desktop Socket
 Distribution Box
 Waterproof Box
 Accessories

2. Accessories 2.1 Modules & socket & connector
2.1.1 45*45mm Power Socket Match Legrand's ' Mosaic/Arteor Support

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F18B	45x45MM	US 16A multi-function socket	white/ black	 F19	45x45mm	S.Africa/Brazil NBR 14136-2002 Outlet 20Amp 250V (Also support S. Africa , India and UK BS546 5 Amp 250V male plug)	white/ black
 F19B	45x22.5mm	S.Africa/Brazil NBR 14136-2002 Outlet 10Amp 250V	white/ black	 F20	45x45MM	US 15A socket	white/ black
 F8	22.5x45mm	USB charging, single port output 5VDC 2.1A, maximum charging current 1*2100mA, screw terminal.	white/ black	 F8C	22.5x45mm	USB Charger 1A	white/ black
 F8D	22.5x45mm	USB charging, dual port output 5VDC 2.1A shared, maximum charging current 1*2100mA, screw terminal, Support YD/T1591-2009, BC1.2, Apple and Samsung phone and IPAD.	white/ black	 F9	45x45mm	USB charging, dual port output 5VDC 2.1A, maximum charging current 1*2100mA, screw terminal.	white/ black
 F1031	45x45mm	USB charging, triple port output 5VDC 3.1A, maximum charging current 1*3100mA, type A+ type C USB charger; screw terminal.	white/ black	 F1042A/A	45x45mm	Dual port USB charger of 4.2A 5VDC; with Short time short-circuit protection & identifying chip; type A/A; Materials be RoHS directive	white/ black
 F1042A/C	45x45mm	Dual port USB charger of 4.2A 5VDC; with Short time short-circuit protection & identifying chip; type A/C;	white/ black	 F1021A-A/A	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/A; with Short time short-circuit protection & identifying chip; with LED indicator.	white/ black
 F1021A-A/C	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/C; with Short time short-circuit protection & identifying chip; with LED indicator.	white/ black	 F1021AB-A/C	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/C; with Short time short-circuit protection & identifying chip; with LED indicator and protector shutter;	white/ black
 F1045	45x45mm	45W USB type C function key; Dimension: 45mm*45mm	white/ black	 F1036	45x45mm	36W USB-1A1C function key; Dimension: 45mm*45mm	white/ black
 F21	22.5x45mm	Cat 5e RJ45 socket with shutter;	white/ black	 F21B	22.5x45mm	Cat 6 RJ45 socket with shutter;	white/ black
 F23	22.5x45mm	Rj11 Telephone socket with shutter, regular with 4 contact pins. 2 contact pins and 6 contact pins should be customization production.;	white/ black	 F23B	22.5x45mm	2 gang RJ45 CAT6 +RJ11 Telephone socket without shutter	white/ black





















Floor Socket

FMD Series
Desktop Socket

Distribution Box

Waterproof Box

Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F23C	22.5x45mm	2 gang RJ45 CAT6 without shutter	white/black	 F22	22.5×45MM	RJ45 UTP Cat5E toolless with shutter	white/black
 F22B	22.5×45MM	RJ45 UTP Cat6 toolless with shutter	white/black	 F22-2	45×45MM	RJ45 UTP Cat5E toolless with shutter	white/black
 F22B-2	45×45MM	RJ45 UTP Cat6 toolless with shutter	white/black	 F22-3	45×45MM	RJ45 UTP Cat5E toolless 2 port with shutter	white/black
 F22B-3	45×45MM	RJ45 UTP Cat6 toolless 2 port with shutter	white/black	 F50	22.5x45mm	Single male TV socket;	white/black
 F50B-F	22.5x45mm	Single Female TV socket;	white/black	 F50B-M	22.5x45mm	Single male TV socket;	white/black
 F51	22.5x45mm	BNC socket	white/black	 F52	22.5x45mm	Φ3.5 earphone for audio/video connector, screw terminals	white/black
 F52A	22.5x45mm	Φ3.5 earphone for audio/video connector, screw terminals	white/black	 F52B	22.5x45mm	Φ3.5 earphone for audio/video connector, Solderless	white/black
 F52C	22.5x45mm	Φ3.5 earphone for audio/video connector, straight blade;	white/black	 F52D	22.5x45mm	Φ3.5 earphone for audio/video connector, with cable	white/black
 F53	22.5x45mm	DIN(eight pins)	white/black	 F55	22.5x45mm	Audio socket provide the stereo audio connect for device such as DVD drive, camera etc.;	white/black
 F56	22.5x45mm	Video socket provide the video connect for device such as DVD drive, camera etc.;	white/black	 F57	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio	white/black

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories





















Floor Socket















FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F57-A	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; Solder type;	white/black	 F57-B	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; soldless/screw type;	white/black
 F57-C	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; straight blade type;	white/black	 F58	22.5x45mm	Sound socket provide the stereo audio connect for device such as DVD drive, camera etc.;	white/black
 F59	22.5x45mm	USB for data 2.0, USB to USB, VBus, D+, Ground, shielded	white/black	 F60-A	22.5x45mm	Male Kalon socket for XLR plug, soldering connection,	white/black
 F60-B	22.5x45mm	Male Kalon socket for XLR plug, Screwing connection,	white/black	 F61	22.5x45mm	Composite video, Left Audio and Right Audio, RJ45 to RCA.	white/black
 F62A	22.5x45mm	Speaker socket, soldering connection;	white/black	 F62B	22.5x45mm	Speaker socket, Screwing connection;	white/black
 F63	22.5x45mm	Audio wiring socket; Dimension: 22.5 mm*45 mm	Black/White	 F65A	22.5x45mm	15 Pins VGA (male type), RS232 socket, soldering connection	white/black
 F65B	22.5x45mm	15 Pins VGA (male type), RS232 socket, Screwing connection	white/black	 F66A	22.5x45mm	15 Pins VGA (female type); RS232 socket, soldering connection	white/black
 F66B	22.5x45mm	15 Pins VGA (female type); RS232 socket, soldering connection	white/black	 F67A	22.5x45mm	9 Pins VGA (male type), RS232 socket, soldering connection	white/black
 F67B	22.5x45mm	9 Pins VGA (male type), RS232 socket, Screwing connection	white/black	 F68A	22.5x45mm	9 Pins VGA (female type); RS232 socket, soldering connection	white/black
 F68A	22.5x45mm	9 Pins VGA (female type); RS232 socket, screwing connection	white/black	 F69A	22.5x45mm	HDMI, 180 degree, 2.0 Standard female/female HDMI socket with protective shutter	white/black

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 F69B	22.5x45mm	HDMI,90 degree ,Male HDMI socket, need additional frame size: 45*45mm when installed in SNAP-in frame	white/black	 F69C	45x45mm	HDMI,180 degree ,Male HDMI socket,need additional frame size: 45*45mm when installed in SNAP-in frame	white/black
 F70	22.5x45mm	Empty plate;material: Polycarbonate; color:white	white/black	 F71	22.5x45mm	S terminal;soldering connection	white/black
 F80	45x22.5mm	1 way switch, 10A, 250V	white/black	 F81	45x22.5mm	2 way curve switch, 10A, 250V	white/black
 F82	45x45mm	1 way switch, 10A, 250V	white/black	 F83	45x45mm	2 way switch, 10A, 250V	white/black
 F84	45x45mm	2 gang/Double Pole Switch 16 Amp 250V,nylon 66, PC coverplate	white/black	 F85	45x45mm	Single switch, 16A, 250V, nylon 66, PC coverplate	white/black
 F100A	45x45mm	2 gang 45*45mm modules optional 2 *RJ45 with for patch panel/floor box	white/black	 F100B	45x45mm	2 gang 45*45mm modules optional 1* RJ45 +1* RJ11 with for patch panel/floor box	white/black
 F100C	45x45mm	2 gang 45*45mm modules optional 2* RJ11 with for patch panel/floor box	white/black	 F-QB53	45x45mm	Acousto-Optic Delay Switch	

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box





















Accessories

Safewire 45*45mm Fast USB Charger












2. Accessories 2.1 Modules & socket & connector
 2.1.2 23*36mm C series Match Panasonic support
 Clip-in 128type Panasonic type modules

Floor Socket
 FMD Series Desktop Socket
 Distribution Box
 Waterproof Box
 Accessories

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 CP1	23*36mm	Two pin power socket	white/black	 CP2-1	23*36mm	3 Pin Universal power socket	white/black
 CP2-2	23*36mm	Small 3 pin universal socket	white/black	 CP3-1	23*36mm	Two third 5 pin (China socket)	white/black
 CP3-2	34x36mm	A half 5 Pin(China Socket)	white/black	 CP3-3	69x36mm	Big 5 Pin(China socket)	white/black
 CP3-4	69x36mm	10 Pin socket(China socket)	white/black	 CP3-5	69x36mm	5 Pin socket(China socket) with USB charging	white/black
 CP3-6	23x72mm	5 Pin power socket with RJ data	white/black	 CP3-7	23x72mm	5 Pin power socket with telephone and computer	white/black
 CP3-8	23x72mm	5 Pin power socket with switch	white/black	 CP4-1	69x36mm	8 Pin Universal socket	white/black
 CP5-1	23x48mm	Thailand 3 Pin power socket	white/black	 CP5-2	23x72mm	Thailand 6 Pin Power socket	white/black
 CP6-1	23x48mm	NEMA5-15R 16A 3 Pin power socket	white/black	 CP6-2	23x72mm	NEMA5-15R 16A 6 Pin power socket	white/black
 CP7-1	23x48mm	NEMA5-20R 20A 3 Pin Power socket	white/black	 CP7-2	23x72mm	NEMA5-20R 20A 6 Pin Power socket	white/black
 CP8	23x48mm	13A BS power socket	white/black	 CP9	23x36mm	16A 2 pin Italy power socket	white/black

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 CD-1-1	23*36mm	2.1A USB	white/black	 CD-1-2A	23*36mm	2.0 USB data solderless /screw fixing	white/black
 CD-1-2B	23*36mm	2.0 USB data straight blade (F-F)	white/black	 CD-1-2C	23*36mm	2.0 USB data /soldering	white/black
 CD-1-2D	23*36mm	2.1A USB Charger with cable	white/black	 CD-1-3A	23*36mm	USB 3.0 Data solder	white/black
 CD-1-3B	23*36mm	USB 3.0 Data straight blade (F-F)	white/black	 CD-1-3C	23*36mm	USB 3.0 with cable	white/black
 CD-2-1	23*36mm	CAT6 RJ45 Computer model	white/black	 CD-2-2	23*36mm	RJ11 telephone models	white/black
 CD-2-3	23*36mm	AMP Bridge	white/black	 CD-2-4	23*36mm	Lucent stents	white/black
 CD-2-5	23*36mm	Double CAT6 bridge	white/black	 CD-3	23*36mm	Computer bridge	white/black
 CD-4	23*36mm	RJ11 Telephone bridge	white/black	 CD-5-1A	23*36mm	15 Pin Female VGA solderless	white/black
 CD-5-1B	23*36mm	15 Pin Female VGA solder	white/black	 CD-5-1C	23*36mm	15 Pin Female VGA solder	white/black
 CD-5-2A	23*36mm	15 Pin Female VGA straight blade	white/black	 CD-5-2B	23x36mm	15 Pin Female VGA 90 elbow	white/black

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

Floor Socket





















FMD Series
 Desktop Socket

Distribution Box






















Waterproof Box

Accessories

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 CD-5-2C	23*36mm	15 Pin Female VGA with cable	white/black	 CD-5-3A	23*36mm	15 Pin Male VGA soldering	white/black
 CD-5-3B	23*36mm	15 Pin Male VGA screw fixing	white/black	 CD-6-1A	23*36mm	HDMI 180 Degree	white/black
 CD-6-1B	23*36mm	HDMI solderless	white/black	 CD-6-1C	23*36mm	HDMI with cable	white/black
 CD-6-1D	23*36mm	Lucent HDMI	white/black	 CD-7-1A	23*36mm	RCA(Audio/Video) Solderless	white/black
 CD-7-1B	23*36mm	RCA(Audio/Video) Straight blade	white/black	 CD-7-2A	23*36mm	AV chromatism solder	white/black
 CP7-2B	23*36mm	AV Chromastism straight blade	white/black	 CD-8-1A	23*36mm	Audio solderless	white/black
 CD-8-1B	23*36mm	Audio straight blade	white/black	 CD-8-1C	23*36mm	Audio solder	white/black
 CD-9-1A	23*36mm	Video solderless	white/black	 CD-9-1B	23*36mm	Video solder	white/black
 CD-10-1A	23*36mm	Microphone solderless	white/black	 CD-10-1B	23*36mm	Microphone solder	white/black
 CD-11-1A	23*36mm	3.5 earphone solderless & straight blade	white/black	 CD-11-1B	23x36mm	3.5 earphone solder	white/black

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
 CD-12	23*36mm	TV socket	white/black	 CD-13	23*36mm	F socket	white/black
 CD-14-1A	23*36mm	LC Optical fiber	white/black	 CD-14-1B	23*36mm	SC Optical fiber	white/black
 CD-14-1C	23*36mm	FC optical fiber	white/black	 CD-15	23*36mm	DC outlet	white/black
 CD-15	23*36mm	BNC Monitoring	white/black	 CD-17-1A	23*36mm	8 Pin Female microphone	white/black
 CD-17-1B	23*36mm	8 Pin Female microphone with cable	white/black	 CD-17-2A	23*36mm	6 Pin Female microphone	white/black
 CD-17-2B	23*36mm	6 Pin Female microphone	white/black	 CD-18-A	23*36mm	Acoustics Female	white/black
 CD-18-B	23*36mm	Acoustics Female	white/black	 CD-19-A	23*36mm	DVI Solder	white/black
 CD-19-B	23*36mm	DVI Straight blade	white/black	 CD-20-1A	23*36mm	Male XLR/Canon solderless	white/black
 CD-20-1B	23*36mm	Male XLR/Canon solder	white/black	 CD-20-2A	23*36mm	DM Female XLR/Canon	white/black
 CD-20-2B	23*36mm	DM Female XLR/Canon	white/black	 CD-20-5	23x36mm	Duale Female XLR/Canon /Dual microphone	white/black
 CD-7D	23*36mm	Empty plate					

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

2.Accessories

2.1 Modules & socket & connector

2.1.3 45*45mm screwless single/double/triple 45 degree socket , with CE certificate



Floor Socket

FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

Picture	Item	Specification	Outline of product
	F15B-1	Color customization single European Schuko Socket without key,more optional color choice, 45 degree for plug easy	16A,250V,2P+E,screw terminals;
	F15B-2	Color customization double European Schuko Socket without key,more optional color choice, 45 degree for plug easy	16A,250V,2P+E,screw terminals;
	F15B-3	Color customization triple European Schuko Socket without key,more optional color choice, 45 degree for plug easy	16A,250V,2P+E,screw terminals;
	F16B-1	Color customization single French Socket without key, white color	16A,250V,2P+E,screw terminals;
	F16B-2	Color customization double French Socket without key, white color	16A,250V,2P+E,screw terminals;
	F16B-3	Color customization triple French Socket without key, white color	16A,250V,2P+E,screw terminals;
	SAQB-45-1	Color customization single French Socket with prtector shutter key,red color;2P+E Tamper proof insert	16A,250V,2P+E,screw terminals;
	SAQB-45-2	Color customization double French Socket with prtector shutter key,red color;2P+E Tamper proof insert	16A,250V,2P+E,screw terminals;
	SAQB-45-3	Color customization triple French Socket with prtector shutter key,red color;2P+E Tamper proof insert	16A,250V,2P+E,screw terminals;

2. Accessories			2.1 Modules & socket & connector		
2.1.5 Multi-Media					
Product Picture/Item	Specification	Color	Product Picture/Item	Specification	Color
 M-8081099	Module of 45 x 22.5 mm compatible with the modular plate system of 80 x 80 mm. It has 2 female RCA connectors for stereo audio and composite video. Module based on 2 female RCA connectors on the front. Shutter option	Grey /Milk white	 M-DMT-VGA-M/F	45*22.5mm with 15 pins, 180° degree of M/F or F/F VGA modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-DB9-F/F	45*22.5mm with 9 pins, 180° degree of M/F or F/F VGA modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-TV-F	45*22.5mm Female socket modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-TV-M	45*22.5mm Male socket modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-BANANA-F	45*22.5mm Solder type Single female BANANA socket modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-2XBANANA-F	45*22.5mm Solder type Dual female BANANA socket modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-BNC-F-F	45*22.5mm Solder type female BNC socket modules from High grade fireproof PC material panel	Grey /Milk white
 M-DMT-3.5 Audio	45*22.5mm Solder type 3.5 Audio jack socket modules from High grade fireproof PC material panel	Grey /Milk white	 M-DMT-RCA-1	45*22.5mm Solder type RCA red color Audio jack socket modules from High grade fireproof PC material panel; This RCA audio connector is pure copper with gold plating and anti-oxidation; Female F equipment Jacks to an RCA female connection	Grey /Milk white
 M-DMT-RCA-2	45*22.5mm Solder type RCA Stereo audio in white and red color jack socket modules from High grade fireproof PC material panel;	Grey /Milk white	 M-DMT-RCA-3	45*22.5mm Solder type composite video (1 x RCA female yellow) and for stereo audio (2 x RCA female white and red) jack socket modules; from High grade fireproof PC material panel;	Grey /Milk white
 M-DMT-1RCA-RJ45	45*22.5mm Solder type RCA red color Audio with RJ45 Jack socket modules from High grade fireproof PC material panel;	Grey /Milk white	 M-DMT-2RCA-RJ45	45*22.5mm Solder type RCA red color Audio with RJ45 Jack socket modules from High grade fireproof PC material panel;	Grey /Milk white
 M-DMT-3RCA-RJ45	45*22.5mm Solder type composite video (1 x RCA female yellow) and for stereo audio (2 x RCA female white and red) with RJ45 jack socket modules; from High grade fireproof PC material panel;	Grey /Milk white	 M-DMT-USB2.0-AF	45*22.5mm Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel; Join two USB 2.0 Type-A Male connectors with this coupler connector.	Grey /Milk white
 M-DMT-USB2.0 A	45*22.5mm Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel; USB 2.0A with terminal	Grey /Milk white	 M-DMT-USB2.0A-RJ45	45*22.5mm Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel; USB 2.0A with RJ45	Grey /Milk white
 M-DMT-USB3.0A	45*22.5mm Solder type USB 3.0 type A Female connector modules from High grade fireproof PC material panel; USB 3.0A with terminal	Grey /Milk white	 M-DMT-HDMI	45*22.5mm Solder type HDMI female connector modules from High grade fireproof PC material panel; HDMI with terminal	Grey /Milk white
 M-DMT-PHJ	45*22.5mm Solder type HDMI female connector modules from High grade fireproof PC material panel; HDMI with terminal	Grey /Milk white			

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

Floor Socket

FMD Series Desktop Socket

Distribution Box





Waterproof Box

Accessories

2. Accessories 2.1 Modules & socket & connector
 2.1.6 RJ45 Modules

Product Picture	Size	Description	Product Picture	Size	Description
	25*38mm	unshielded, Krone IDC, RJ45 module		25*38mm	unshielded, Dual IDC, RJ45 module
M-NE-182			M-NE-182A		
	25*50mm	unshielded, Krone IDC, RJ45 module		25*50mm	unshielded, Dual IDC, RJ45 module
M-NE-88B			M-NE-189A		

2. Accessories 2.1 Modules & socket & connector
 2.1.8 USB, LAN, HDMI and RJ11 with cable

		180 degree USB2.0A/USB 2.0B adaptor			180 degree USB 2.0A/USB 2.0A coupler/socket
H-USB-06			H-USB-08		
		90 degree USB2.0A/USB 2.0A Coupler/socket			180 degree USB3.0A/USB 3.0A Coupler/socket
H-USB-08C			H-USB-08D		
		90 degree USB3.0A/USB 3.0A Coupler/socket			180 degree RJ45/USB2.0A coupler/adaptor
H-USB-08E			H-USB-07		
		180 degree HDMI Female-Female adaptor			90 degree HDMI Female-Female adaptor
H-HDMI-20			H-HDMI-20B		

2.Accessories 2.1 Modules & socket & connector
 2.1.8 USB,L AN,HDMI and RJ11 with cable

Product Picture/Item	Catagories	Description	Color	Product Picture/Item	Catagories	Description	Color
 H-USB-08-KSB	90 degree USB adaptor with USB socket and 0.8M cable	1). Type:USB 2.0A/USB 2.0A; 2).Materia of shield:ABS; 3). Material of cable: PVC; 4).Degree:90; 5).Nickel Brass Chrome Adapter ; 6).0.8M length USB cable ;	Black/White	 R-NE-68B-KSB	LAN Adaptor and 0.8 M LAN cable	1).Type:CAT5e,Unshielded ABS plastic RJ45 2).Materia of shield:ABS RAL9010; 3).Degree:180; 4).Plating 50U Contact ; 5).0.8M length LAN 24 AWG cable ;	Black/White
 H-HDMI-KSB	HDMI with 1.5 Meter length cable	1) Male/Female HDMI With 15cm Cable (Length no less than 15cm) 2)Supports HDMI 2.1 Data Rate up to 48Gbps, 8K60Hz, 4K120Hz 3)additional frame size: 45*45mm when installed in SNAP-in frame	Black/White	 H-RJ11-KSB	Rj11telephone with cable	1)Type: RJ11 Tephone with 1.5m Cable 2)Material of shied: ABS RAL9010 3)Degree: 180	Black/White
 SFS-TB1-WP	Waterproof LAN with Cable	1)IP67 2)Type: Cat5E, Unshielded ABS plastic RJ45 3)Materia of shield : PA6BG33 4)Degree: 180 5)Locking device, screw fastening 6) 1M length LAN 24 AWG cable	Black	 SFS-TB2-WP	Waterproof LAN with Cable	1)IP67 2)Type: Cat6, Unshielded ABS plastic RJ45 3)Materia of shield : PA6BG33 4)Degree: 180 5) Locking device, screw fastening 6)1M length LAN 24 AWG cable	Black
 SHDMI-BJ1-WP	Waterproof HDMI with Cable	1)IP67 2)Type: HDMI 2.0 3)Materia of shield : PA6BG33 4)Degree: 180 5)Locking device, screw fastening 6) 1M HDMI cable	Black	 SUSB3-BJ2-WP	waterproof USB with Cable	1)IP67 2)Type: USB 3.0 3)Materia of shield : PA6BG33 4)Degree: 180 5)Locking device, screw fastening 6) 1M USB cable	Black

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

2.Accessories 2.1 Modules & socket & connector
 2.1.9 Keystone

Product Picture	Description	Material	Color	Product Picture	Description	Material	Color
 KNE-217	CAT6, unshielded 110 IDC data keystone	Polycarbonate	Black/White	 KNE-217S	CAT5e, 110 IDC Zinc alloy shielded	Polycarbonate	Black/White
 KNE-170	CAT6, Low Profile unshielded data keystone	Polycarbonate	Black/White	 KNE-176	CAT3, Low Profile unshielded telephone 6P6C keystone	Polycarbonate	Black/White

2. Accessories **2.1 Modules & socket & connector**
2.1.9 Keystone












Floor Socket

FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

Product Picture	Description	Material	Color	Product Picture	Description	Material	Color
 SFHB-4006-C3-6	CAT3, unshielded telephone keystone; 90 degree toolless wire bonding; Six core	Polycarbonate	Black/White	 SFHB-4006-C3-4	CAT3, unshielded telephone keystone; 90 degree toolless wire bonding; Four core	Polycarbonate	Black/White
 SFHB-8017-C5	Cat5e, shielded data keystone; 90 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray	 SFHB-8017-C6	Cat6, shielded data keystone; 90 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
 SFTD-M2101-C6A	Cat6A, shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray	 SFTD-M2101-C7	Cat7, shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
 SFTD-M2101-C5E	Cat5E, Pass-through shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray	 SFTD-M2101-C6	Cat6, Pass-through shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
 SFHB-8058-C3	Cat3, Pass-through unshielded telephone socket; 90 degree wiring	Polycarbonate	Black/White	 SFHB-8058-C5E	Cat5E, Pass-through unshielded data keystone; 90 degree wiring	Polycarbonate	Black/White
 SFHB-8058-C6	Cat6, Pass-through unshielded data keystone; 90 degree wiring	Polycarbonate	Black/White	 SFTD-8014-C5E	Cat5E, unshielded data keystone; 180 degree toolless wire bonding;	Polycarbonate	Black/White

2.Accessories 2.1 Modules & socket & connector
 2.1.10 RJ45 Jack&Coupler

Product Picture/Item	Description	Material	Color	Product Picture/Item	Description	Material	Color
 R-NE-68B	CAT5e, Unshielded ABS plastic RJ45 Jack/Jack; TIA/EIA:568A/B coded; Wiring: Toolless; Type: Unshielded; Angle: 180°; Wire Gauge Supported: 22-26AWG Cable;	Polycarbonate	Grey/ Milk white	 R-NE-68S	CAT5e, shielded Nickel plating RJ45 Jack/Jack; Shielded STP Cover: Designed for protection from external radiated noise; 50 micron Gold Plating: On the jack contacts for durability and a long life;	Polycarbonate	Nickel plating
 R-NE-216AS	CAT6, Zinc alloy, shielded 110 IDC RJ45 Jack/Jack; Toolless 568A/B coded	Zinc alloy	Silver	 R-NE-59S	CAT5e, shielded Chromeplate chroming RJ45 Jack/Jack	Zinc alloy	Chrome
 R-NE-172S	CAT5e, shielded Nickel plating RJ45 Jack/Jack	Polycarbonate	Nickel plating	 R-US-08T	CAT5e, unshielded double-side board RJ45 Jack/Jack	Polycarbonate	Grey/ Milk white
 R-US-08TS	CAT5e, shielded Nickel plating double-side board RJ45 Jack/Jack	Polycarbonate	Nickel plating	 R-US-08S	8P8CS, shielded Nickel plating RJ45 Jack/Jack	Polycarbonate	Nickel plating

Floor Socket



Desktop Socket

Distribution Box

Waterproof Box

Accessories

2.Accessories 2.1 Modules & socket & connector
 2.1.11 Junction box for Network

Product Picture/Item	Description	Material	Color	Product Picture/Item	Description	Material	Color
 J-NE-200A	CAT5e/6 66*36*25.7mm unshielded ABS junction box; Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.; Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Polycarbonate	Grey/ Milk white	 J-NE-200AS	CAT5e/6 66*36*25.7mm shielded chromelate chroming junction box; Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.; Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Zinc alloy	Chrome

2. Accessories

2.1 Modules & socket & connector
2.1.11 Junction box for Network

Product Picture	Description	Material	Color	Product Picture	Description	Material	Color
	CAT5e/6 84*37*23mm unshielded ABS junction box; Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.; Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Polycarbonate	Grey/ Milk white		CAT5e/6 84*37*23mm shielded chromelate chroming junction box; Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.; Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Zinc alloy	Chrome
J-NE-200				J-NE-200S			
	Single port unshielded surface RJ45 Jack; Single port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white		Single port shielded surface RJ45 Jack; Use the same tried and true 110 Style punch downs, which have phosphor bronze contacts; Single port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-NE-13				J-NE-53			
	Dual ports unshielded surface RJ45 Jack; Use the same tried and true 110 Style punch downs, which have phosphor bronze contacts; Two port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white		Dual ports shielded surface RJ45 Jack; Use the same tried and true 110 Style punch downs, which have phosphor bronze contacts; Two port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-NE-37				J-NE-54			
	Single port surface box; Single ports surface mount boxes allow for base or side entry of cable	Polycarbonate	Nickel plating		Dual port surface box; Dual ports surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-6117031				J-6117032			
	Four ports surface box; Four ports surface mount boxes allow for base or side entry of cable.	Polycarbonate	Nickel plating		Six ports surface box; Six ports surface mount boxes allow for base or side entry of cable.	Polycarbonate	Grey/ Milk white
J-NE-138				J-NE-140			
	Six ports surface box; Six ports surface mount boxes allow for base or side entry of cable.	Polycarbonate	Grey/ Milk white				
J-NE-139							

Floor Socket

FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories

**Switch Socket & USB charger
 RCD Switch Socket**

RCD0130FPW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS5733
Description	RCD Fuse spur unit PC clad

RCD0130PW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Single RCD plastic socket, unswitch

RCD0130SPW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Single RCD plastic socket, switch

RCD0230PW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Twin RCD plastic socket, unswitch

RCD0230SPW



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Twin RCD plastic socket, switch

RCD0130SMG



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	with a metal box, with switch
Standard	CE BS7288 BS1363
Description	Single RCD metal socket, switch

RCD0130FMG



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	with a metal box
Standard	CE BS7288 BS1363
Description	RCD Fuse spur unit Metal clad

RCD0230SMG



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	with a metal box, with switch
Standard	CE BS7288 BS1363
Description	Double RCD metal socket, switch

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories

**Switch Socket & USB charger
 RCD Switch Socket**

RCDZA30PW/B



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	BS RCD Portable Adaptor (Passive/Active)

RCDZE30PW/B



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS1363
Description	SAA RCD Portable Adaptor (Passive/Active)

RCD0230SPA



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	Twin RCD Plastic socket with switch

RCDZA30PWA



Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	RCD Portable Adaptor (Active)

BG0106P-A



Ratings	13A 240V
Rated trip current	4~6mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	Portable Ground-Fault Circuit-Interrupters

L30PBA



Specifications	10A IN-LINE RCD
Connect	Single
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40mS
Material	PC

L30PBG



Specifications	16A IN-LINE RCD
Connect	Single
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40mS
Material	PC

BG0206S-A/B/C/D



Specifications	Ground-Fault Circuit -Interrupters(GFCI)modules
Connect	Double
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40mS
Material	PC

Floor Socket

FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories

2.3 Waterproof cover plate& splash cover




IP55



SF-HM09-MZ-ABS-W

Material	ABS Plastic
Size	One size 86
Color	White

SF-HM09-MZ-ABS-B



Material	ABS Plastic
Size	One size 86
Color	Blue

SF-HM09-MZ-PS-W



Material	PS
Size	One size 86
Color	White

SF-HM09-MZ-ABS-Y



Material	ABS Plastic
Size	One size 86
Color	Yellow

SF-HM02-F



Material	PVC
Size	One size 86
Color	White

SF-HM03-F



Material	PVC
Size	One size 86
Color	White

SF-HM04-F



Material	PVC
Size	One size 86
Color	White

SF-HM06-F



Material	PVC
Size	One size 86
Color	White

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories

2.3 Waterproof cover plate& splash cover

Floor Socket



SF-HM07-F

Material	PVC
Size	One size 86
Color	White



SF-HM17

Material	PP
Size	One size 86
Color	Brown

FMD Series Desktop Socket



SF-HM19

Material	PP
Size	One size 86
Color	White



Distribution Box



SF-HM18-1

Material	ABS Plastic
Size	One size 86
Color	White

Waterproof Box



SF-HM18-2

Material	ABS Plastic
Size	One size 86
Color	Brown



SF-HM18-3

Material	ABS Plastic
Size	One size 86
Color	White

Accessories



SF-HM18-4

Material	ABS Plastic
Size	One size 86
Color	White



GN-2

Material	PVC
Size	Double size 86
Color	White

2. Accessories

2.3 Waterproof cover plate& splash cover

GN-3




Material	PVC
Size	Triple size 86
Color	White

GN-22



Material	PS
Size	Double size 86
Color	White

GN-32




Material	PS
Size	Triple size 86
Color	Brown

SF-HM14-1



Material	ABS Plastic
Size	
Color	White

SF-HM14-5



Material	PS
Size	
Color	Black

ZT-21



Material	PS
Size	118 2way
Color	White

ZT-22



Material	PS
Size	118 2way
Color	Blue

ZT-32



Material	PS
Size	118 3way
Color	Blue



Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories

2.3 Waterproof cover plate& splash cover

Floor Socket



ZT-42


Material	PS
Size	118 4way
Color	blue

C-1-ABS



Material	ABS Plastic
Size	86*86mm
Color	White

FMD Series Desktop Socket



C-2-ABS

Material	ABS Plastic
Size	86*86mm
Color	White



Distribution Box



S1-W

Material	PC
Size	Type 86 + Phone holder
Color	White

Waterproof Box



S1-G

Material	PC
Size	Type 86 + Phone holder
Color	White



S1-B

Material	PC
Size	Type 86 + Phone holder
Color	White

Accessories



S2-W

Material	PC
Size	Type 86 + Phone holder
Color	White



S2-G

Material	PC
Size	Type 86 + Phone holder
Color	White

2. Accessories

2.1 Modules & socket & connector
2.2.2 Clad Metal Switch Socket

Product Picture/Item	Feature	Specification	Product Picture	Feature	Specification
 E42613SR	1). Single Pole; 2). Meet BS1363 standard; Intertek test conformity report#19061168HKG-001; 3). Clad Metal switch socket;	1). 13A Single switch socket; 2). All switch & sockets are fixed with wiring box.	 E42613SDR	1). Single Pole; 2). Meet BS1363 standard; Intertek test conformity report#19061167HKG-001; 3). Clad Metal switch socket;	1). 13A Double switch socket; 2). All switch & sockets are fixed with wiring box.
 SF-8336SR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 13A Single switch socket; 2). All switch & sockets are fixed with wiring box.	 SF-8336SLR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 13A Single switch socket with light; 2). All switch & sockets are fixed with wiring box.
 SF-8336SDR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 13A Double switch socket; 2). All switch & sockets are fixed with wiring box.	 SF-8336SLDR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 13A Double switch socket with light; 2). All switch & sockets are fixed with wiring box.
 SF-UK811R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 1 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	 SF-UK812R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 1 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
 SF-UK821R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 2 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	 SF-UK822R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 2 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
 SF-UK831R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 3 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	 SF-UK832R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 3 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
 SF-UK841R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 4 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	 SF-UK842R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 4 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.

Floor Socket
 Desktop Socket
 Distribution Box
 Waterproof Box
 Accessories

2. Accessories **2.1 Modules & socket & connector**
2.2.2 Clad Metal Switch Socket

Floor Socket

FMD Series Desktop Socket

Distribution Box





Waterproof Box

Accessories

Product Picture/Item	Feature	Specification	Product Picture/Item	Feature	Specification
 SF-UK861R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 6 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	 SF-UK862R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 6 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
 SF-UK820LR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 20A DP Switch with light; 2). All switch & sockets are fixed with wiring box.	 SF-UK845LR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 45A DP Switch with light; 2). All switch & sockets are fixed with wiring box.
 SF-8315SR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 15A Single switch socket; 2). All switch & sockets are fixed with wiring box.	 SF-8315SLR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). 15A Single switch socket with light; 2). All switch & sockets are fixed with wiring box.
 SF-81UTR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Telephone socket; 2). All switch & sockets are fixed with wiring box.	 SF-UK81VR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Single Television Socket; 2). All switch & sockets are fixed with wiring box.
 SF-UK82VR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Double Television Socket; 2). All switch & sockets are fixed with wiring box.	 SF-E328R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Single Fan Dimmer; 2). All switch & sockets are fixed with wiring box.
 SF-E318TR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Twin light Dimmer; 2). All switch & sockets are fixed with wiring box.	 SF-E318R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Single Light Dimmer; 2). All switch & sockets are fixed with wiring box.
 SF-E818R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Single Light Dimmer; 2). All switch & sockets are fixed with wiring box.	 SF-E818TR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Twin Light Dimmer; 2). All switch & sockets are fixed with wiring box.

2.Accessories

2.1 Modules & socket & connector
2.2.2 Clad Metal Switch Socket



Product Picture/Item	Feature	Specification	Product Picture/Item	Feature	Specification
 SF-E828R	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Single Fan Dimmer; 2). All switch & sockets are fixed with wiring box.	 SF-E828TR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Twin Fan Dimmer; 2). All switch & sockets are fixed with wiring box.
 SF-81VR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Single TV Socket; 2). All switch & sockets are fixed with wiring box.	 SF-82VR	1). Single Pole; 2). With CB certificate and report; 3). Clad Metal switch socket;	1). Double TV Socket; 2). All switch & sockets are fixed with wiring box.

Floor Socket

Desktop Socket

2.Accessories

2.1 Modules & socket & connector
2.2.3.1 86*86 wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
 SF-86-USB-18B	1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded Schuko outlet; 3). MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024,IEC61000 for EMC; 4). All materials be RoHS directive tested	1). Main material: PC; 2). Color: White 3). With 2/dual USB ports; 4). USB Output: 5V 2.1A in total 5). Input: 100~240V~50/60Hz,0.4A 6). Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8). Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9). Provision for earthing: With earthing contact; 10). Degree of protection against electric shock: With increased protection; 11). Automatic distribution current, over charge protection, short circuit protection 12). Type of terminals: Screw-type; 13). Existence of shutter: With; 14). Number of poles: 2P+E; 15). Package: Blister or plastic into master carton;
 SF-86-USB-19B	1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. 2). AC wall socket module with single grounded French outlet; 3). MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1). Main material: PC; 2). Color: White 3). With 2/dual USB ports; 4). USB Output: 5V 2.1A in total 5). Input: 100~240V~50/60Hz,0.4A 6). Rated Current: 16A; 7). Receptacle: French socket; 8). Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9). Provision for earthing: With earthing contact; 10). Degree of protection against electric shock: With increased protection; 11). Automatic distribution current, over charge protection, short circuit protection 12). Type of terminals: Screw-type; 13). Existence of shutter: With; 14). Number of poles: 2P+E; 15). Package: Blister or plastic into master carton;

Distribution Box

Waterproof Box

Accessories

2. Accessories **2.1 Modules & socket & connector**
2.2.3.1 86*86 wall Flush-mounting USB charger

Floor Socket

FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

Product Picture/Item	Feature	Specification
 SF-86-USB-28B	1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. 2). AC wall socket module with single grounded BS 13A outlet; 3). MAX 5V dual 2.1A USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1). Main material: PC; 2). Color: White 3). With 2/dual USB ports; 4). USB Output: 5V 2.1A in total 5). Input: 100~240V~50/60Hz, 0.4A 6). Rated Current: 13A; 7). Receptacle: BS socket; 8). Dimension L*W*D: 86mm x 86mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) 9). Provision for earthing: With earthing contact; 10). Degree of protection against electric shock: With increased protection; 11). Automatic distribution current, over charge protection, short circuit protection 12). Type of terminals: Screw-type; 13). Existence of shutter: With; 14). Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
 SF-86-USB-23B	1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. 2). AC wall socket module with single grounded universal outlet; 3). MAX 5V dual 2.1A USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1). Main material: PC; 2). Color: White 3). With 2/dual USB ports; 4). USB Output: 5V 2.1A in total 5). Input: 100~240V~50/60Hz, 0.4A 6). Rated Current: 10A; 7). Receptacle: Universal socket; 8). Dimension L*W*D: 86mm x 86mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) 9). Provision for earthing: With earthing contact; 10). Degree of protection against electric shock: With increased protection; 11). Automatic distribution current, over charge protection, short circuit protection 12). Type of terminals: Screw-type; 13). Existence of shutter: With; 14). Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
 SF-86-USB-27	1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. 2). MAX 5V dual 2.1A USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1). Main material: PC; 2). Color: White 3). With 2/dual USB ports; 4). USB Output: 5V 2.1A in total 6). Input: 100~240V~50/60Hz, 0.4A 7). Dimension L*W*D: 86mm x 86mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) 8). Provision for earthing: With earthing contact; 9). Degree of protection against electric shock: With increased protection; 10). Automatic distribution current, over charge protection, short circuit protection 11). Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
 SFX-86-USB-59	1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. 2). MAX 5V dual 4.2A USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1). Main material: PC; 2). Color: White 3). With 2/dual USB ports; type A/type C; 4). USB Output: 5V 4.2A in total 6). Input: 100~240V~50/60Hz, 0.4A 7). Dimension L*W*D: 86mm x 86mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) 8). Provision for earthing: With earthing contact; 9). Degree of protection against electric shock: With increased protection; 10). Automatic distribution current, over charge protection, short circuit protection 11). Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;

2. Accessories **2.1 Modules & socket & connector**
2.2.3.1 86*86 wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
 <p>SF-USB-59J-I-QC3.0</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>3). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). QC3.0 3A/5V,2A/9V USB output power;</p> <p>4). USB Output: 5V 4.2A in total</p> <p>6). Input: 100~240V~50/60Hz,0.4A</p> <p>7). Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>8). Provision for earthing: With earthing contact;</p> <p>9). Degree of protection against electric shock: With increased protection;</p> <p>10). Automatic distribution current, over charge protection, short circuit protection</p> <p>11). Type of terminals: Screw-type;</p> <p>12). Package: Blister or plastic into master carton;</p>
 <p>SF-USB-59J-I-PD</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>3). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). QC3.0 3A/5V,2A/9V USB output power ,for I PAD;</p> <p>4). USB Output: 5V 4.2A in total</p> <p>6). Input: 100~240V~50/60Hz,0.4A</p> <p>7). Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>8). Provision for earthing: With earthing contact;</p> <p>9). Degree of protection against electric shock: With increased protection;</p> <p>10). Automatic distribution current, over charge protection, short circuit protection</p> <p>11). Type of terminals: Screw-type;</p> <p>12). Package: Blister or plastic into master carton;</p>
 <p>SF-USB-43E</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). AC wall socket module with duplex grounded Schuko outlet;</p> <p>3). MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>4). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). duplex Schuko socket with 2* dual port USB charger;</p> <p>4). USB Output: 5V 2.4A in total</p> <p>5). Input: 100~240V~50/60Hz,0.4A</p> <p>6). Rated Current: 16A;</p> <p>7). Receptacle: Schuko(European socket);</p> <p>8). Dimension L*W*D: 146mm x 75mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>9). Provision for earthing: With earthing contact;</p> <p>10). Degree of protection against electric shock: With increased protection;</p> <p>11). Automatic distribution current, over charge protection, short circuit protection</p> <p>12). Type of terminals: Screw-type;</p> <p>13). Existence of shutter: With;</p> <p>14). Number of poles: 2P + E;</p> <p>15). Package: Blister or plastic into master carton;</p>
 <p>SF-USB-46E</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). AC wall socket module with duplex grounded French outlet;</p> <p>3). MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>4). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). duplex French socket with 2* dual port USB charger;</p> <p>4). USB Output: 5V 2.4A in total</p> <p>5). Input: 100~240V~50/60Hz,0.4A</p> <p>6). Rated Current: 16A;</p> <p>7). Receptacle: French socket;</p> <p>8). Dimension L*W*D: 146mm x 75mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>9). Provision for earthing: With earthing contact;</p> <p>10). Degree of protection against electric shock: With increased protection;</p> <p>11). Automatic distribution current, over charge protection, short circuit protection</p> <p>12). Type of terminals: Screw-type;</p> <p>13). Existence of shutter: With;</p> <p>14). Number of poles: 2P + E;</p> <p>15). Package: Blister or plastic into master carton;</p>

Floor Socket
 Desktop Socket
 Distribution Box
 Waterproof Box
 Accessories

2. Accessories **2.1 Modules & socket & connector**
2.2.3.2 80*80mm wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
 <p>SF-80-USB-43B</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). AC wall socket module with single grounded Schuko outlet;</p> <p>3). MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>4). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). With 2/dual USB ports;</p> <p>4). USB Output: 5V 2.1A in total</p> <p>5). Input: 100~240V~50/60Hz,0.4A</p> <p>6). Rated Current: 16A;</p> <p>7). Receptacle: Schuko(European socket);</p> <p>8). Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>9). Provision for earthing: With earthing contact;</p> <p>10). Degree of protection against electric shock: With increased protection;</p> <p>11). Automatic distribution current, over charge protection, short circuit protection</p> <p>12). Type of terminals: Screw-type;</p> <p>13). Existence of shutter: With;</p> <p>14). Number of poles: 2P + E;</p> <p>15). Package: Blister or plastic into master carton;</p>
 <p>SF-80-USB-46B</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). AC wall socket module with single grounded French outlet;</p> <p>3). MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>4). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). With 2/dual USB ports;</p> <p>4). USB Output: 5V 2.1A in total</p> <p>5). Input: 100~240V~50/60Hz,0.4A</p> <p>6). Rated Current: 16A;</p> <p>7). Receptacle: French;</p> <p>8). Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>9). Provision for earthing: With earthing contact;</p> <p>10). Degree of protection against electric shock: With increased protection;</p> <p>11). Automatic distribution current, over charge protection, short circuit protection</p> <p>12). Type of terminals: Screw-type;</p> <p>13). Existence of shutter: With;</p> <p>14). Number of poles: 2P + E;</p> <p>15). Package: Blister or plastic into master carton;</p>
 <p>SF-80-USB-17B-C</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>3). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). With 2/dual USB ports;</p> <p>4). USB Output: 5V 2.1A in total</p> <p>6). Input: 100~240V~50/60Hz,0.4A</p> <p>7). Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>8). Provision for earthing: With earthing contact;</p> <p>9). Degree of protection against electric shock: With increased protection;</p> <p>10). Automatic distribution current, over charge protection, short circuit protection</p> <p>11). Type of terminals: Screw-type;</p> <p>12). Package: Blister or plastic into master carton;</p>
 <p>SF-80-USB-17E</p>	<p>1). Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of vaious types of global apple, Android and other devices.</p> <p>2). MAX 5V dual 4.2A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>3). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). With 2/dual USB ports;type A/type C;</p> <p>4). USB Output: 5V 4.2A in total</p> <p>6). Input: 100~240V~50/60Hz,0.4A</p> <p>7). Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>8). Provision for earthing: With earthing contact;</p> <p>9). Degree of protection against electric shock: With increased protection;</p> <p>10). Automatic distribution current, over charge protection, short circuit protection</p> <p>11). Type of terminals: Screw-type;</p> <p>12). Package: Blister or plastic into master carton;</p>

Floor Socket

FMD Series Desktop Socket



Distribution Box

Waterproof Box

Accessories

2. Accessories

2.1 Modules & socket & connector
2.2.3.2 80*80mm wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
 SF-USB-17J-C-QC3.0	<ol style="list-style-type: none"> Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; All materials be RoHS directive tested 	<ol style="list-style-type: none"> Main material: PC; Color: White QC3.0 3A/5V,2A/9V USB output power; USB Output: 5V 4.2A in total Input: 100~240V~50/60Hz, 0.4A Dimension L*W*D: 80mm x 80mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) Provision for earthing: With earthing contact; Degree of protection against electric shock: With increased protection; Automatic distribution current, over charge protection, short circuit protection Type of terminals: Screw-type; Package: Blister or plastic into master carton;
 SF-USB-17I-PD	<ol style="list-style-type: none"> Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; All materials be RoHS directive tested 	<ol style="list-style-type: none"> Main material: PC; Color: White QC3.0 3A/5V,2A/9V USB output power, for IPAD; USB Output: 5V 4.2A in total Input: 100~240V~50/60Hz, 0.4A Dimension L*W*D: 80mm x 80mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) Provision for earthing: With earthing contact; Degree of protection against electric shock: With increased protection; Automatic distribution current, over charge protection, short circuit protection Type of terminals: Screw-type; Package: Blister or plastic into master carton;
 SF-80-USB-53	<ol style="list-style-type: none"> Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. 1*2.1A+1*4.2A USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; All materials be RoHS directive tested 	<ol style="list-style-type: none"> Main material: PC; Color: White With 2/dual USB ports; 1*2.1A+1*4.2A; USB Output: 5V 4.2A in total Input: 100~240V~50/60Hz, 0.4A Dimension L*W*D: 80mm x 80mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) Provision for earthing: With earthing contact; Degree of protection against electric shock: With increased protection; Automatic distribution current, over charge protection, short circuit protection Type of terminals: Screw-type; Package: Blister or plastic into master carton;
 SF-80-USB-54	<ol style="list-style-type: none"> Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices. AC wall socket module with single grounded Schuko outlet; MAX 5V dual 2.4A USB output power, really output be certificated by CE, IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; All materials be RoHS directive tested 	<ol style="list-style-type: none"> Main material: PC; Color: White With 2/dual USB ports; USB Output: 5V 2.4A in total Input: 100~240V~50/60Hz, 0.4A Rated Current: 16A; Receptacle: Schuko (European socket); Dimension L*W*D: 80mm x 80mm x 46.5mm; (Minimum Mounting Box Depth: 45mm) Provision for earthing: With earthing contact; Degree of protection against electric shock: With increased protection; Automatic distribution current, over charge protection, short circuit protection Type of terminals: Screw-type; Existence of shutter: With; Number of poles: 2P + E; Package: Blister or plastic into master carton;

Floor Socket



Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories **2.1 Modules & socket & connector**
2.2.3.2 80*80mm wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
 <p>SF-80-USB-54B</p>	<p>1). Single charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices.</p> <p>2). AC wall socket module with single grounded Schuko outlet;</p> <p>3). MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>4). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). With single USB ports;</p> <p>4). USB Output: 5V 2.4A in total</p> <p>5). Input: 100~240V~50/60Hz,0.4A</p> <p>6). Rated Current: 16A;</p> <p>7). Receptacle: Schuko(European socket);</p> <p>8). Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>9). Provision for earthing: With earthing contact;</p> <p>10). Degree of protection against electric shock: With increased protection;</p> <p>11). Automatic distribution current, over charge protection, short circuit protection</p> <p>12). Type of terminals: Screw-type;</p> <p>13). Existence of shutter: With;</p> <p>14). Number of poles: 2P + E;</p> <p>15). Package: Blister or plastic into master carton;</p>
 <p>SF-80-USB-54C</p>	<p>1). Single charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supplies stable and can be use of various types of global apple, Android and other devices.</p> <p>2). AC wall socket module with single grounded Schuko outlet;</p> <p>3). MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC;</p> <p>4). All materials be RoHS directive tested</p>	<p>1). Main material: PC;</p> <p>2). Color: White</p> <p>3). With single USB ports;</p> <p>4). USB Output: 5V 2.4A in total</p> <p>5). Input: 100~240V~50/60Hz,0.4A</p> <p>6). Rated Current: 16A;</p> <p>7). Receptacle: Schuko(European socket);</p> <p>8). Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm)</p> <p>9). Provision for earthing: With earthing contact;</p> <p>10). Degree of protection against electric shock: With increased protection;</p> <p>11). Automatic distribution current, over charge protection, short circuit protection</p> <p>12). Type of terminals: Screw-type;</p> <p>13). Existence of shutter: With;</p> <p>14). Number of poles: 2P + E;</p> <p>15). Package: Blister or plastic into master carton;</p>

Wall flush-mounting 80*80 mm series only 2.0A USB charger with individual indicator

Floor Socket

FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories **2.2.4 Switch socket**
2.2.4 Single/Double/Twin switch socket for floor box

Product Picture/Item	Specification	Materials/Color	Product Picture/Item	Feature	Materials/Color
 HT-86SS	13A1 gang switched socket, single pole	PC White	 HT-146TS	13A 2 ang switched socket, single pole	PC White
 SCF-SSS	13A 2 ang switched socket, single pole for floor box	PC White	 SA-146WF	WiFi Duplex 2 gang switch socket	PC White
 SM-F21-1	Single gang flat faceplate with IP44 CE certificate pop up French socket	PC White	 SM-F21-2	Single gang bevelled faceplate with P44 CE certificate pop up French socket	PC White
 SF-80-S-54	80*80mm Schuko/Euro socket	PC White	 SF-80-S-65	80*80mm 65W Type C USB Charger	PC White

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

2.5 Frame & Faceplate & Bottom

2.5.1 Frame and Bridges/Calipers for modules

Floor Socket



SAP024



SAP025



SAP026



SAP027




SAP028




SAP030

FMD Series Desktop Socket



SAP031



SAP032




SAP01



SAP02



SAP03



SADF01

Distribution Box

2.5.2 Metal bottom box



HTD-120JH
120x 120x60mm




B-H622-C
For HTD-622




HTD-200JH
100x200x55mm


Waterproof Box



B-H622-C
For HTD-622











B-H624-C
For HTD-624



B-H628-C
For HTD-628

Accessories

2.Accessories **Keystone & Shutter & Data & Jack**
2.5.2 Shutter

Product Picture/Item	Specification	Panel Materials	Product Picture/Item	Specification	Panel Materials
 SNE-87	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:22.5*45mm /0.89" /1.78" 3). Lable paper is option;	fire-retardant plastic	 SNE-210	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:45*45mm /1.78" /1.78" ; 3). Lable paper is option;	fire-retardant plastic
 SNE-41	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:25*50mm /0.98" /1.96" 3). Lable paper is option;	fire-retardant plastic	 SNE-89	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:25*50mm /0.98" /1.96" 3). Lable paper is option;	fire-retardant plastic
 SNE-47	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:50*50mm /1.96" /1.96" 3). Lable paper is option;	fire-retardant plastic	 SNE-295	1).Single port; 2).Plate Dimension:80*80mm /1.96" /1.96" ; 3). with ID-station label;	fire-retardant plastic
 SNE-296	1).Dual ports; 2).Plate Dimension:80*80mm /1.96" /1.96" ; 3). with ID-station label;	fire-retardant plastic	 SNE-297	1).Triple ports; 2).Plate Dimension:80*80mm /1.96" /1.96" ; 3). with ID-station label;	fire-retardant plastic

2.Accessories **Keystone & Shutter & Data & Jack**
2.5.3 Faceplate

Product Picture/Item	Description	Materials	Product Picture/Item	Description	Materials
 F-8081106	45*45mm Cable outlet mask	Polycarbonate	 F-8081035	45*45mm Cable outlet mask	Polycarbonate
 F-8075164	45*45mm faceplate for empty	Polycarbonate	 F-8075162	45*45mm faceplate for USB charger	Polycarbonate
 F-8075163	45*45mm faceplate for VGA	Polycarbonate	 F-6117080	Single gang bevelled faceplate for 45*45mm modules	Polycarbonate
 F-6117079	Single gang flat faceplate for 45*45mm modules	Polycarbonate	 F-8081036	50*50mm Single port Faceplate for HDMI	Polycarbonate
 F-8081002	50*50mm Dual port Faceplate for HDMI	Polycarbonate	 F-8081005	50*50mm Faceplate for HDMI and 1 RCA	Polycarbonate

Floor Socket













Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories Keystone & Shutter & Data & Jack 2.5.3 Faceplate

Product Picture/Item	Description	Materials	Product Picture/Item	Description	Materials
 F-8081004	50*50mm Faceplate for HDMI and 2 RCA	Polycarbonate	 F-8081003	50*50mm Faceplate for HDMI and 3 RCA	Polycarbonate
 F-8081107	50*50mm Cable outlet mask	Polycarbonate	 F-8081044	80*80mm single gang bevelled Faceplate with frame	Polycarbonate
 F-8081045	80*80mm double gang flat Faceplate with frame	Polycarbonate	 F-8081204	80*80mm single gang flat Faceplate with frame	Polycarbonate
 F-8081028	86*86mm Single port for 25*50mm modules	Polycarbonate	 F-8081071	86*86mm flat single gang Single port for 50*50mm modules	Polycarbonate
 F-8081072	86*146mm double gang Faceplate	Polycarbonate	 F-8081205	86*86mm flush-mounting bevelled plate with frame	Polycarbonate
 HB86M1-1/2	86*90mm Black/Gold/White color Single/Dual port Datafaceplate	Polycarbonate	 HB86M2	86*90mm Black/Gold/White color 1/2/3/4 port Datafaceplate	Polycarbonate

Floor Socket

FMD Series
Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories Bottom box
 2.5.4 Plastic bottom box

Product Picture	Item	Catagories	Description	Color
	B-8080072	80*80mm box	Size:80*80*40mm bottom box, Height:40mm; For 80 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080075	80*80mm box	Size:80*80*36mm Low profile bottom box, Height:36mm; For 80 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080062	86*86mm box	Size:86*86*35mm bottom box, Height:35mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080052	86*86mm box	Size:86*86*28mm Low profile bottom box, Height:28mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080063	86*146mm box	Size:86*146*35mm bottom box, Height:35mm; For 86 single gang type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080100	115*70*36mm box	Size:115*70*36mm bottom box, Height:36mm; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080101	115*70*47mm box	Size:115*70*36mm bottom box, Height:47mm; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white

Floor Socket
 Desktop Socket
 Distribution Box
 Waterproof Box
 Accessories

2.Accessories		Bottom box		
		2.5.4 Plastic bottom box		
Product Picture	Item	Catagories	Description	Color
	B-8080074	86*86mm box	Size:86*86*28mm scline 45 degree bottom box, Height:73mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	red/black/ white
	B-8080073	86*146mm box	Size:86*146*73mm bottom box, Height:73mm; For 146 double gang type modules; Thickened bottom box: Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	SFD86-5-38	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screws; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*38mm ;height :38mm	Red/black/ white
	SFD86-5-45	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screws; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*45mm ;height :45mm	Red/black/ white
	SFD86-5-50	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screws; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*50mm ;height :50mm	Red/black/ white
	SFD86-7-38S	86*86mm box	86 fireproof box(2.5) four direction connecting height:38mm	Red/black/ white
	SFD86-7-38D	86*86mm box	86 fireproof box(2.5) four direction connecting height:38mm	Red/black/ white

Floor Socket





FMD Series Desktop Socket

Distribution Box

Waterproof Box

Accessories

2. Accessories Bottom box
 2.5.4 Plastic bottom box

Product Picture	Item	Catagories	Description	Color
	SFD86-7-45S	86*86mm box	86 fireproof box(2.5) four direction connecting height:45mm	Red/black/ white
	SFD86-7-45D	86*86mm box	Sealess 86 type plastic box; Feature: 1). Sealess gap between boxes; 2).Stainless galvanized fixing screws; 3). 12 slots for fixing technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*38mm ;height :45mm	Red/black/ white
	SFD86-7-50S	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screws; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*45mm ;height :50mm	Red/black/ white
	SFD86-7- 50D	86*86mm box	86 fireproof box(2.5) four direction connecting height: 50mm	Red/black/ white

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories

A series

Floor Socket



SF-A1-87-2
 Champagne gold color;
 warm light; Aluminum
 wire drawing induction
 footlight;



SF-A1-87-5
 deep silver color;
 warm light; Aluminum
 wire drawing induction
 footlight;



SF-A1-87-6
 black color; warm light;
 Aluminum wire drawing
 induction footlight;



SF-A1-87-7
 glass white color; warm light;
 Aluminum wire drawing
 induction footlight;

FMD Series
 Desktop Socket

B series (Legrand type)

Distribution Box



SF-B1-87-1
 white color; warm light;
 induction footlight;



SF-B1-87-2
 champagne gold color;
 warm light; induction
 footlight;



SF-B1-87-5
 deep silver color; warm light;
 induction footlight;

Waterproof Box



SF-B1-87-6
 black color; warm light;
 induction footlight;



SF-B1-89-1
 white color; white light;
 induction footlight;



SF-B1-89-2
 champagne gold color;
 warm light; footlight;

Accessories



SF-B1-89-6
 black color; warm light;
 footlight;



SF-B1-89-5
 silver color; warm light;
 footlight;



SF-B1-89
 white color; warm light;
 induction footlight;

C series



SF-C-87-1

white color; white light;
 bend footlight;



SF-C-87-2

black color; white light;
 bend footlight;



SF-C-87-3

Gray color; warm light;
 bend footlight;




SF-C-87-4

champagne gold color;
 warm light; bend footlight;



SF-C-87-5

gold color; white light;
 bend induction footlight;



SF-C1-88-1

champagne gold color;
 warm light; plane footlight



SF-C1-88-2

white color; white light;
 plane footlight



SF-C2-89

champagne gold color;
 white light; bend footlight;



SF-C2-89-1

black color; white light;
 bend footlight;

Floor Socket

Desktop Socket

Distribution Box

Waterproof Box

Accessories