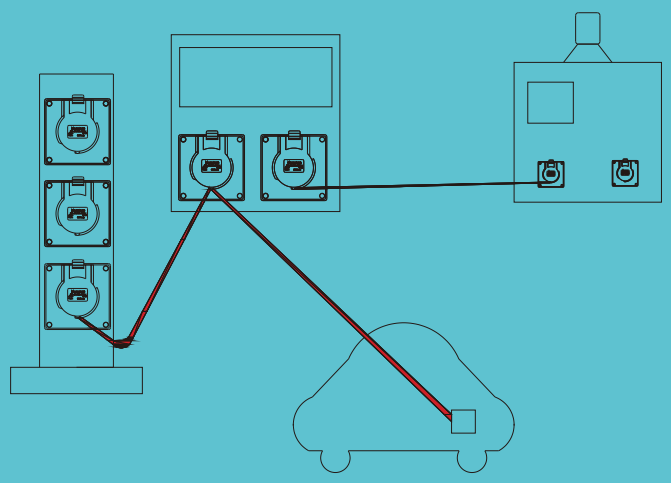

WENZHOU SAFEWIRE ELECTRIC CO.,LTD.

Address:Liushi town, Yueqing, Wenzhou , Zhejiang,China,325604

Tel:0086-577-61725370

Mail:info@safewirele.com

Wechat:happyhe7806

Skype:happy.he7806

Whatsapp:008618612380398

QQ:1119145917

Web:**WWW.SAFEWIRELE.COM**

SAFEWIRE, Safe Wiring System

Since 1998;20 years OEM factory for global brand

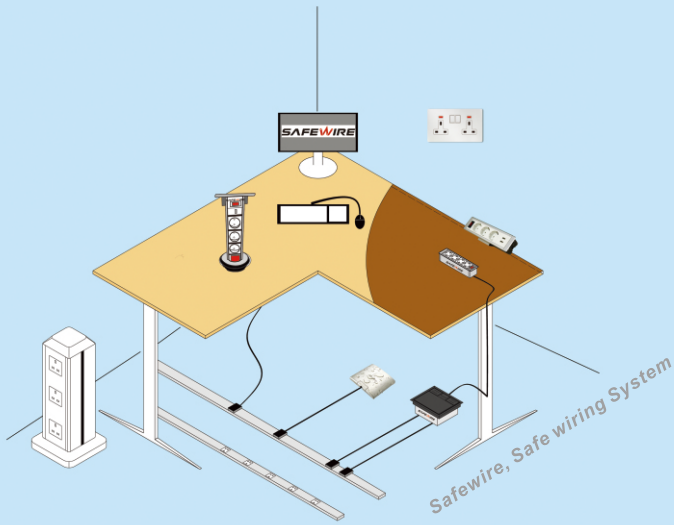

Cable Management / Power Distribution Electric & Accessories

OUR STANDARD YOUR GUARANTEE

ISO 9001 Quality

ISO 14001 Environment

OHSAS 18001

TÜV Rheinland®

20 years OEM factory for almost world-wide brand of floor sockets

Safewire 2022/2023 Catalogue

For more details,
please visit:
www.safewirele.com
or scan this QR code.

SAFEWIRE

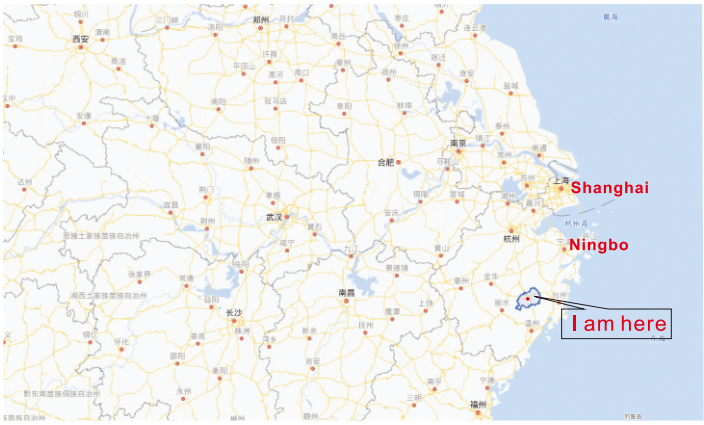

About Us

The Safewire behind the flagship brand Feilifu ,Feilifu Technology Co., Ltd was established on 1998. Since then, we embarked on the relentless pursuit of being the biggest supplier with over 30,000 square meters building areas in China as we choose only the best and safest electrical products with their consumers in mind.

We provided OEM and ODM service for most worldwide brands. And exported products& service to over 56 countries in Europe, Australia, Middle East and Southeast etc. When our clients purchase our products, they know they are getting value for their money, with performance, reliability and quality. Every product carries our personal guarantee and service commitment. Our team stands behind every product we sell-even years after it is installed. We now offer reliable years warranty on all Safewire products, covering parts and labor. We have built our reputation on this.

Of course we also have a huge range of shapes, sizes, boxes with IP Ratings and your choice of a metal finish or inlay, all readily available from your local electrical wholesaler. If none of our options are suitable for your application, please contact us about customization solution for you.

The world will keep changing. This is what keeps Safewire ahead. Listening to, and acting on, customer feedback sets our products apart from others. Safewire, On the way!

Our Lab

Our object is to deliver professional connected wiring solutions that are based on new business models and offer new services for all kind of applications.

Today, Safewire is an active member of important associations and consortiums in electric industry-both worldwide and on a regional level.

A) Associations/ Alliances IEC; CQC;
B) Certification bodies ISO, CE, RoHS, EN/EC,

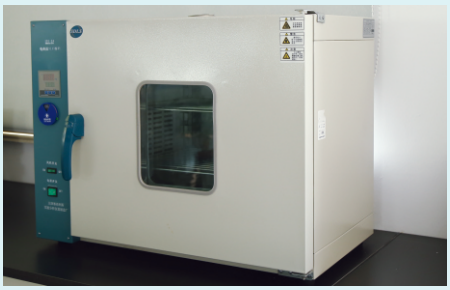



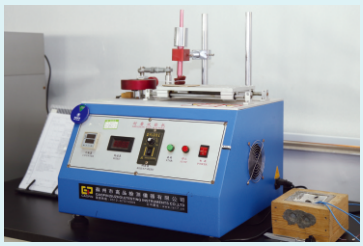

ISO 9001 Quality
ISO 14001 Environment
OHSAS 18001

TÜV Rheinland

UK CA **BS1363** **EC-RED** CB FC

ISO 9001,ISO14001 OHSAS System

3rd Party Test Certificate

Although not a mandatory requirement the company supports as a policy that all functional products should undergo a third party test certification process. Please noted that our products fulfill type testing to the National Standards GB/T23307 and International standards IEC60884 can demonstrate compliance and product reliability.

QUALITY MANAGEMENT SYSTEM CERTIFICATE
Certificate No. 00117Q311737R1M3300
We hereby certify that
Feilifu Technology Co.,Ltd.
Quality Management System
GB/T 19001-2016 / ISO 9001:2015
CHINA QUALITY CERTIFICATION CENTRE

ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATE
Certificate No. 00118E30020R1M3300
We hereby certify that
Feilifu Technology Co.,Ltd.
Environmental Management System
GB/T 24001-2016 / ISO 14001:2015
CHINA QUALITY CERTIFICATION CENTRE

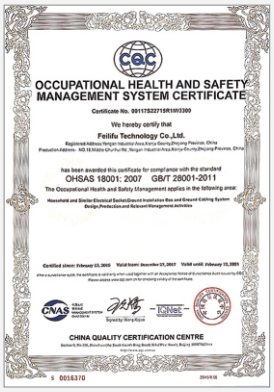
OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT SYSTEM CERTIFICATE
Certificate No. 00119S2315R1M3300
We hereby certify that
Feilifu Technology Co.,Ltd.
OHSAS 18001: 2007 GB/T 28001-2011
CHINA QUALITY CERTIFICATION CENTRE

Socket CE Certificated by TUV,Germany

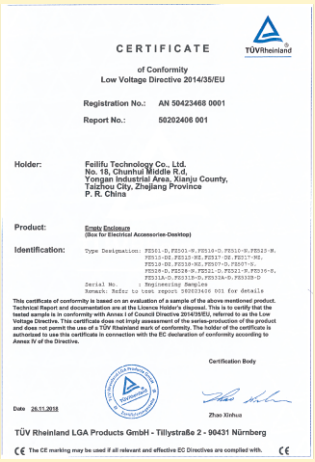
CERTIFICATE
of Conformity
Low Voltage Directive 2014/35/EU
Registration No.: AN 50423468 0001
Report No.: 50202406 001
Holder: Feilifu Technology Co., Ltd. No. 18, Chunhui Middle R.d, Yongan Industrial Area, Xianju County, Taizhou City, Zhejiang Province P. R. China
Product: Empty Enclosure (Box for Electrical Accessories-Desktop)
Identification: Type Designation: PS501-D,PS501-M,PS510-D,PS510-M,PS520-M, PS510-DE,PS510-ME,PS517-DE,PS517-ME, PS518-DE,PS518-ME,PS507-D,PS507-M, PS518-D,PS518-M,PS521-D,PS521-M,PS519-D, PS519A-D,PS519B-D,PS533A-D,PS533B-D
Serial No. : Engineering Samples
Remark: Refer to test report 50202406 001 for details
This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive 2014/35/EU, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorised to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.
Certification Body
Date 26.11.2018
Zhao Xinhua
TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
The CE marking may be used if all relevant and effective EC Directives are complied with.

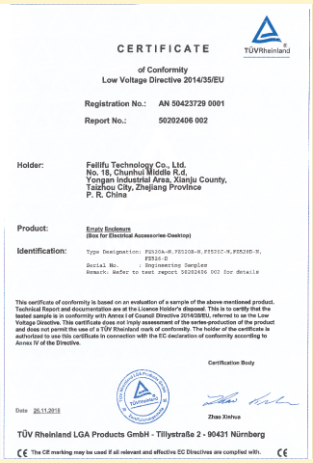
CERTIFICATE
of Conformity
Low Voltage Directive 2014/35/EU
Registration No.: AN 50423729 0001
Report No.: 50202406 002
Holder: Feilifu Technology Co., Ltd. No. 18, Chunhui Middle R.d, Yongan Industrial Area, Xianju County, Taizhou City, Zhejiang Province P. R. China
Product: Empty Enclosure (Box for Electrical Accessories-Desktop)
Identification: Type Designation: PS520A-M,PS518-M,PS520C-M,PS528S-M, PS526-S
Serial No. : Engineering Samples
Remark: Refer to test report 50202406 002 for details
This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive 2014/35/EU, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorised to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.
Certification Body
Date 26.11.2018
Zhao Xinhua
TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
The CE marking may be used if all relevant and effective EC Directives are complied with.

CERTIFICATE
of Conformity
Low Voltage Directive 2014/35/EU
Registration No.: AN 50423434 0001
Report No.: 50202399 001
Holder: Feilifu Technology Co., Ltd. No. 18, Chunhui Middle R.d, Yongan Industrial Area, Xianju County, Taizhou City, Zhejiang Province P. R. China
Product: Empty Enclosure (Box for Electrical Accessories-Floor Box)
Identification: Type Designation: PS221,PS666-T/LE/BL,PS979-T/F/BL,HTD-1, HTD-1L,HTD-101,HTD-101P,HTD-181, HTD-102P,HTD-182AGB,HTD-102E,HTD-121EP, HTD-140PE,HTD-140PEP,HTD-140E,HTD-31, HTD-146EP,HTD-14E,HTD-141,HTD-146G, HTD-146GL,HTD-17E,HTD-178L,HTD-18, (continue on page 0002)
This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive 2014/35/EU, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorised to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.
Certification Body
Date 26.11.2018
Zhao Xinhua
TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
The CE marking may be used if all relevant and effective EC Directives are complied with.

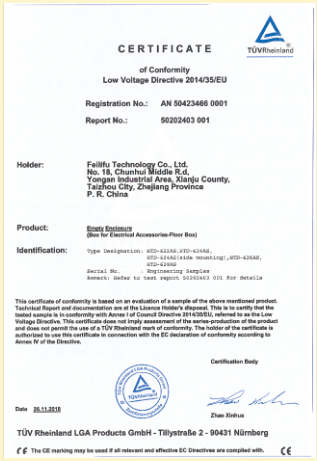
CERTIFICATE
of Conformity
Low Voltage Directive 2014/35/EU
Registration No.: AN 50423466 0001
Report No.: 50202403 001
Holder: Feilifu Technology Co., Ltd. No. 18, Chunhui Middle R.d, Yongan Industrial Area, Xianju County, Taizhou City, Zhejiang Province P. R. China
Product: Empty Enclosure (Box for Electrical Accessories-Floor Box)
Identification: Type Designation: HTD-626AB,HTD-626AE, HTD-626AG(side mounting),HTD-626AH, HTD-626BE
Serial No. : Engineering Samples
Remark: Refer to test report 50202403 001 for details
This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive 2014/35/EU, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorised to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.
Certification Body
Date 26.11.2018
Zhao Xinhua
TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
The CE marking may be used if all relevant and effective EC Directives are complied with.

Socket CE Certificated by TUV,Germany

CERTIFICATE
of Conformity
Low Voltage Directive 2014/35/EU
Registration No.: AN 50423434 0002
Report No.: 50202399 001
Holder: Feilifu Technology Co., Ltd. No. 18, Chunhui Middle R.d, Yongan Industrial Area, Xianju County, Taizhou City, Zhejiang Province P. R. China
Product: Empty Enclosure (Box for Electrical Accessories-Floor Box)
Identification: (continue from page 0001)
Type Designation: HTD-181, HTD-1,HTD-1P, HTD-10,HTD-140E, HTD-180EP,HTD-810CE,HTD-116CEP,HTD-26, HTD-26L,HTD-26E,HTD-3,HTD-39, HTD-71,HTD-71L,HTD-140TE,HTD-140TEP
Serial No. : Engineering Samples
Remark: Refer to test report 50202399 001 for details
This certificate of conformity is based on an evaluation of a sample of the above mentioned product. Technical Report and documentation are at the Licence Holder's disposal. This is to certify that the tested sample is in conformity with Annex I of Council Directive 2014/35/EU, referred to as the Low Voltage Directive. This certificate does not imply assessment of the series-production of the product and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorised to use this certificate in connection with the EC declaration of conformity according to Annex IV of the Directive.
Certification Body
Date 26.11.2018
Zhao Xinhua
TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg
The CE marking may be used if all relevant and effective EC Directives are complied with.

CERTIFICATE OF CONFORMITY
No.: 212CT5072001SPC
Applicant : Wenzhou Silwawer Electricion Co.,Ltd.
Address : 2nd floor,Wealth Garden,Liuokhown,Yueqing, Wenzhou,China
Manufacturer : Wenzhou Silwawer Electricion Co.,Ltd.
Address : 2nd floor,Wealth Garden,Liuokhown,Yueqing, Wenzhou,China
Product : French sockets
Trademark : Safewire
Model : F16C
The submitted sample of the above equipment has been tested and found to comply with the following European Directive:
Low Voltage Directive - 2014/35/EU
The standard(s) used for showing compliance with the essential requirements

Applicable Standard(s)	Test Report(s) Number
IEC/EN 60884-1:2002+A1:2006+A2:2013	212CT5072001SP

This certificate is part of the full test report(s) and should be read in conjunction with it. This certificate is based on an evaluation of one sample of above mentioned product. It does not imply assessment of the production of the product (without the written approval of Shenzhen ZCT Technology Co., Ltd. this certificate is not permitted to be reproduced, except in full. It is not permitted to use the test lab's logo. The CE marking may only be used if all relevant and effective European Directives are applicable.
Shenzhen ZCT Technology Co., Ltd.

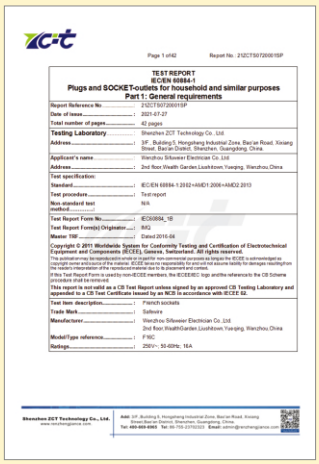
Page 1 of 62 Report No.: 212CT5072001SP
TEST REPORT
IEC/EN 60884-1
Plugs and SOCKET-outlets for household and similar purposes
Part 1: General requirements
Report Reference No.: 212CT5072001SP
Date of issue: 2021-07-27
Total number of pages: 62 pages
Testing Laboratory: Shenzhen ZCT Technology Co., Ltd
Address: 3F., Building 5, Hongsheng Industrial Zone, Baoan Road, Xixiang Street, Baoan District, Shenzhen, Guangdong, China
Applicant's name: Wenzhou Silwawer Electricion Co. Ltd
Address: 2nd floor,Wealth Garden,Liuokhown,Yueqing, Wenzhou,China
Test specification:
Standard: IEC/EN 60884-1:2002+A1:2006+A2:2006+A2:2013
Test procedure: Test report
Non-standard test method: N/A
Test Report Form No.: IEC60884_1B
Test Report Form(s) Originator: BAQ
Master TRF: Dated 2016-04
Copyright © 2011 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.
This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.
Test Item description: French sockets
Trade Mark: Safewire
Manufacturer: Wenzhou Silwawer Electricion Co. Ltd
2nd floor,WealthGarden,Liuokhown,Yueqing, Wenzhou,China
Model/Type reference: F16C
Ratings: 250V~, 50-60Hz, 16A
Shenzhen ZCT Technology Co., Ltd.

Certificat d'évaluation de la Conformité (CdC)
Certificate of Conformity
00295552

CMIM Certificate of Morocco

IP55 Waterproof testing certificate & report

EMTEK

Test Report

Applicant	: Wenzhou Safewire Electric Co., Ltd.
Address	: No.152 Xingguo Road, Xingguo industry zone, Liushi town, Yueqing, Wenzhou, China, 325604
Manufacture	: Wenzhou Safewire Electric Co., Ltd.
Address	: No.152 Xingguo Road, Xingguo industry zone, Liushi town, Yueqing, Wenzhou, China, 325604
Factory	: Wenzhou Safewire Electric Co., Ltd.
Address	: No.152 Xingguo Road, Xingguo industry zone, Liushi town, Yueqing, Wenzhou, China, 325604
Product Name	: Waterproof floor socket
Model/Type	: FD-777
Received Date	: April 02, 2019
Testing Period	: April 02, 2019- April 03, 2019

Test Summary

No.	Test Item	Test Standard	Test Conclusion
1	IP55 Test	IEC 60529: 2013	Pass

Note:
Pass: Meet the requirements.
Fail: Do not meet the requirements.
N/A: Do not evaluate or provide only test results.

Tested by: Sup Zha — Sup Zhu, Tested engineer

Reviewed by: Eddie Yang, Reviewed engineer

Report No.: ED190401067L01 Page 1 of 5 Ver.1.0

RoHS Certificate &Testing report

Report No.: 21ZCTC0720002RIR Page:1/ 19 Rev:00

RoHS Test Report

Applicant	: Wenzhou Safewire Electrician Co.,Ltd
Address	: 2nd floor,Wealth Garden,Liushitown,Yueqing, Wenzhou,China
Manufacturer	: Wenzhou Safewire Electrician Co.,Ltd
Address	: 2nd floor,Wealth Garden,Liushitown,Yueqing, Wenzhou,China

The following sample(s) was were submitted and identified on behalf of the clients as :

Sample Name	: French sockets
Trade Mark	: Safewire
Model Number	: F16C
Sample Received Date	: Jul 15, 2021
Testing Period	: Jul 15, 2021,Jul 20, 2021
Test Requested	: Selected test (s) in the selected parts as requested by client with the RoHS Directive 2011/65/EU and its subsequent amendments EU No. 2015/863.
Test Method	: Please refer to next page(s).
Test Result	: Please refer to next page(s).

Prepared by: Eddie Yang

Approved & Authorized Signer: Jack Yang / Manager

Shenzhen ZCT Technology Co., Ltd.

Verification of Conformity

Certificate No.: 21ZCTC0720002RIC

Applicant	: Wenzhou Safewire Electrician Co.,Ltd
Address	: 2nd floor,Wealth Garden,Liushitown,Yueqing, Wenzhou,China
Manufacturer	: Wenzhou Safewire Electrician Co.,Ltd
Address	: 2nd floor,Wealth Garden,Liushitown,Yueqing, Wenzhou,China
Product	: French sockets
Brand Name	: Safewire
Model No.	: F16C

Requirement	Applied Standards	Document Evidence	Result
RoHS Directive	2011/65/EU 2015/863	Test Report No.: 21ZCTC0720002RIR	Conform
RoHS Standards	IEC 62321:2013		

RoHS

Remark: The Certificate of compliance is based on a test procedure or an evaluation of the above-mentioned product. This is to certify that the above-mentioned product is in compliance with the RoHS Directive 2011/65/EU and its subsequent amendments EU No. 2015/863 of the European parliament on the Restriction of the use of certain Hazardous Substances [Lead (Pb), Mercury (Hg), cadmium (Cd), Hexavalent chromium (Cr), polybrominated biphenyls (PBBs) and polybrominated diphenyl ethers (PBDEs), Hexabromocyclododecane (HBCDD), Bis-(2-ethylhexyl) Phthalate (DEHP), Benzylbutyl Phthalate (BBP), Dibutyl Phthalate (DBP)] in Electrical and Electronic equipment. This certificate can be checked for validity at www.mrcheckyourprice.com.

Shenzhen ZCT Technology Co., Ltd.

Switch CB/GCC Certificate

Vkan Certification &Testing Co., Ltd.

Gulf-Type Examination Certificate

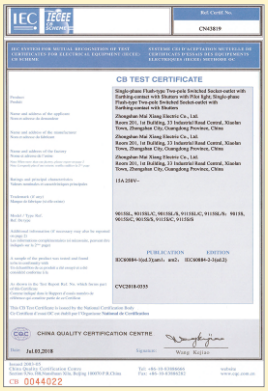

CB TEST CERTIFICATE

CHINA QUALITY CERTIFICATION CENTRE

CB 0044022

CB TEST CERTIFICATE

CHINA QUALITY CERTIFICATION CENTRE

CB 0044550

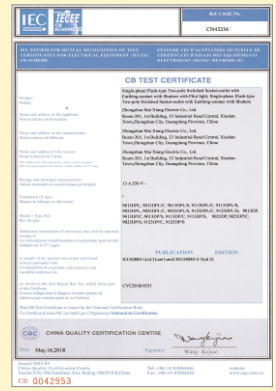

CB TEST CERTIFICATE

CHINA QUALITY CERTIFICATION CENTRE

CB 0042953

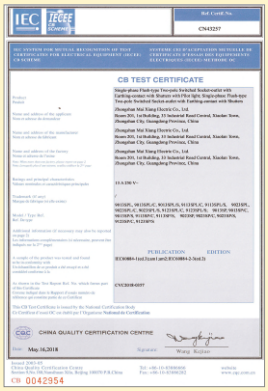

CB TEST CERTIFICATE

CHINA QUALITY CERTIFICATION CENTRE

CB 0042954

Patent

实用新型专利证书

实用新型专利证书

实用新型专利证书

实用新型专利证书

实用新型专利证书

外观设计专利证书

SAFEWIRE

Equipment

We produce high quality electric products and export all over the world.

Safewire Cable Management , Power Distribution Electric & Electrician products etc.

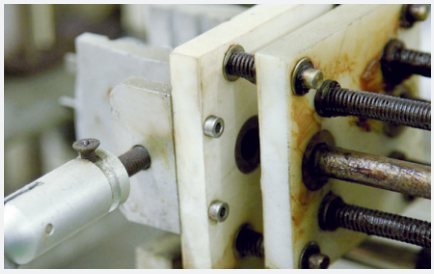

Our production facilities include:

- Factory: 30,000 square meters building areas;
- R&D department:3D design and engineers with vast experience and knowledge.
- Tools department: We have brand new CNC center with erosion machines, trilling machines and saw machines.
- Press department: Equipped with several new press machines for up to 100 t and 10 lathe machines metal cutting and bending machines. etc.
- Galvanization department: Newly refurbished automatic galvanizing line. We can make Ag,Zn, Ni and Tn plating on our metal and copper parts.
- Own independent electrical laboratory--Full routine testing for our own products, 300 sqm of advanced technology lab.

Bulk order of raw material

ALUMINIUM ANGOT A70

Weight: 20/25kg Al (Min): 99% -99.9% Appearance: silvery white
Aluminum ingot for re-melting is produced by molten salt electrolysis method using alumina and cryolite, Products meet the national standard.
GB/T1196-2002.The surface of ingot is clean and smoot.

Chemical Composition %										
Grade	AL≥	impurities≤								
		Si	Fe	Cu	Ga	Mg	Zn	Mn	others	Sum
A199.9	99.9	0.5	0.07	0.01	0.02	0.01	0.03	-	0.01	0.1
A199.85	99.9	0.8	0.12	0.01	0.03	0.02	0.03	-	0.02	0.15
A199.7	99.7	0.1	0.2	0.01	0.03	0.02	0.03	-	0.03	0.3
A199.6	99.6	0.16	0.25	0.01	0.03	0.03	0.03	-	0.03	0.4
A199.5	99.5	0.22	0.3	0.02	0.03	0.05	0.05	-	0.03	0.5
A199.00	99	0.42	0.5	0.02	0.03	0.05	0.05	-	0.05	1

COPPER“SCRAP”

All from electrical cables and wires cables.

High purity: Cu up to 99. 99%
MinWire diameter : 0. 30mm, 0. 25mm and 0. 20mm
Weight/spool : 3kg,5kg,7kg,15kg and 20kg
Tensile strengths : 1000 N/mm ^{2}, 900 N/mm ^{2},
450 N/mm ^{2} and 500 N/ mm ^{2}

Applications:
Copper scrap can be used on low speed wire cutting machines like Agie-charmilles, Sodick, Mitsubishi and Makino.

IRON
STEEL "PLATES”

Steel plates is widely used in Building Construction ,Bridge, Architecture, Vehicles Components, hipping, Boiler, high pressure container ,Large Structure steel, etc.

Type	Hot rolled steel plate/mild plate steel plate /black steel plate/carbon steel plate /sheet plate
Standard	ASTM A20/A20M, ASTM A36, JIS G3115, DIN 17100, EN 10028
Grade	Q195, Q235, Q235A, Q235B, Q345B, SPHC, SPHD, SS400, ASTM A36, S235JR, S275JR, S345JR, S355JOH, S355J2H, ASTM A283, ST37, ST52, ASTM A252 Gr. 2(3), ASTM A572 Gr. 500, ASTM A500 Gr. A(B, C, D) and so on
Length	1000~12000mm(normal size 6000mm, 12000mm)
Width	600~3000mm (normal size 1250mm, 1500mm, 1800mm, 2200mm, 2400mm, 2500mm)
Thickness	1.0~100mm

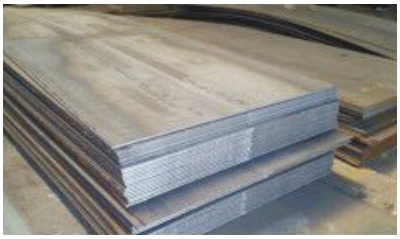

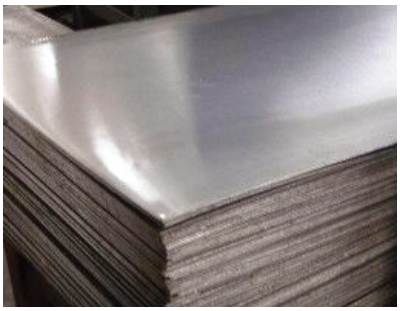

ZINC

Product Description: .
Purity: 99.995% pure zinc ingot other purity is available.

Chemical Composition %									
Code No.	Zn≥	impurity content≤							
		Cd	Fe	Cu	Sn	Al	As	Sb	total
Zn99.995	99.9	0.002	0.001	0.001	0.001	-	-	-	0.005
Zn99.99	99.9	0.003	0.003	0.002	0.001	-	-	-	0.01
Zn99.95	99.7	0.02	0.01	0.002	0.001	-	-	-	0.02
Zn99.5	99.6	0.07	0.04	0.002	0.002	0.01	0.005	0.01	0.5
Zn98.7	99.5	0.2	0.05	0.005	0.002	0.01	0.01	0.02	1.3
Zn99.995	99	Cd	Fe	Cu	Sn	Al	As	Sb	total

SAFEWIRE | Since 1998;20 years OEM factory for global brand

Delivery to global market

1	法国 France		14	印度 India		27	新加坡 Singapore	
2	德国 Germany		15	斯里兰卡 Sri Lanka		28	印度尼西亚 Indonesia	
3	西班牙 Spain		16	巴基斯坦 Pakistan		29	越南 Vietnam	
4	波兰 Poland		17	阿联酋 United Arab Emirates		30	南非 South Africa	
5	俄罗斯 Russia		18	卡塔尔 Qatar		31	尼日利亚 Nigeria	
6	澳大利亚 Australian		19	伊拉克 Iraq		32	摩洛哥 Morocco	
7	韩国 Korea		20	伊朗 Iran		33	莫桑比克 Mozambique	
8	加拿大 Canada		21	以色列 Israel		34	喀麦隆 Cameroon	
9	巴拉圭 Paraguay		22	哈萨克斯坦 Kazakhstan		35	柬埔寨 Camdobia	
10	阿根廷 Argentina		23	乌兹别克斯坦 Uzbekistan		36	约旦 Jordan	
11	厄瓜多尔 Ecuador		24	香港 Hong Kong		37	塞浦路斯 Cyprus	
12	秘鲁 Peru		25	马来西亚 Malaysia		38	沙特 Saudi Arabia	
13	智利 Chile		26	泰国 Thailand			... ...	

Safewire products cover IEC standard, BS standard and others etc.

——— **Your are the next**

On/Off Line Logistic

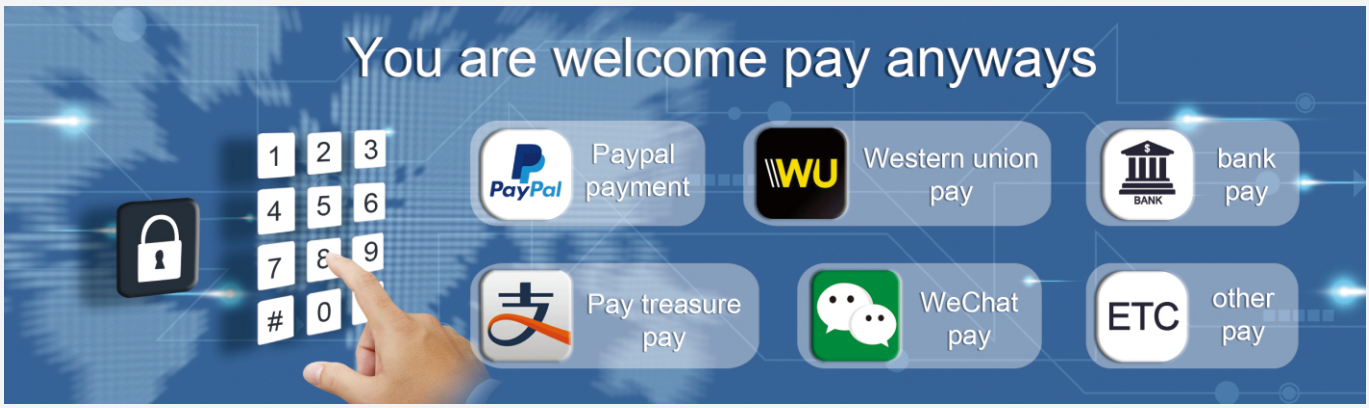

Design & Innovation

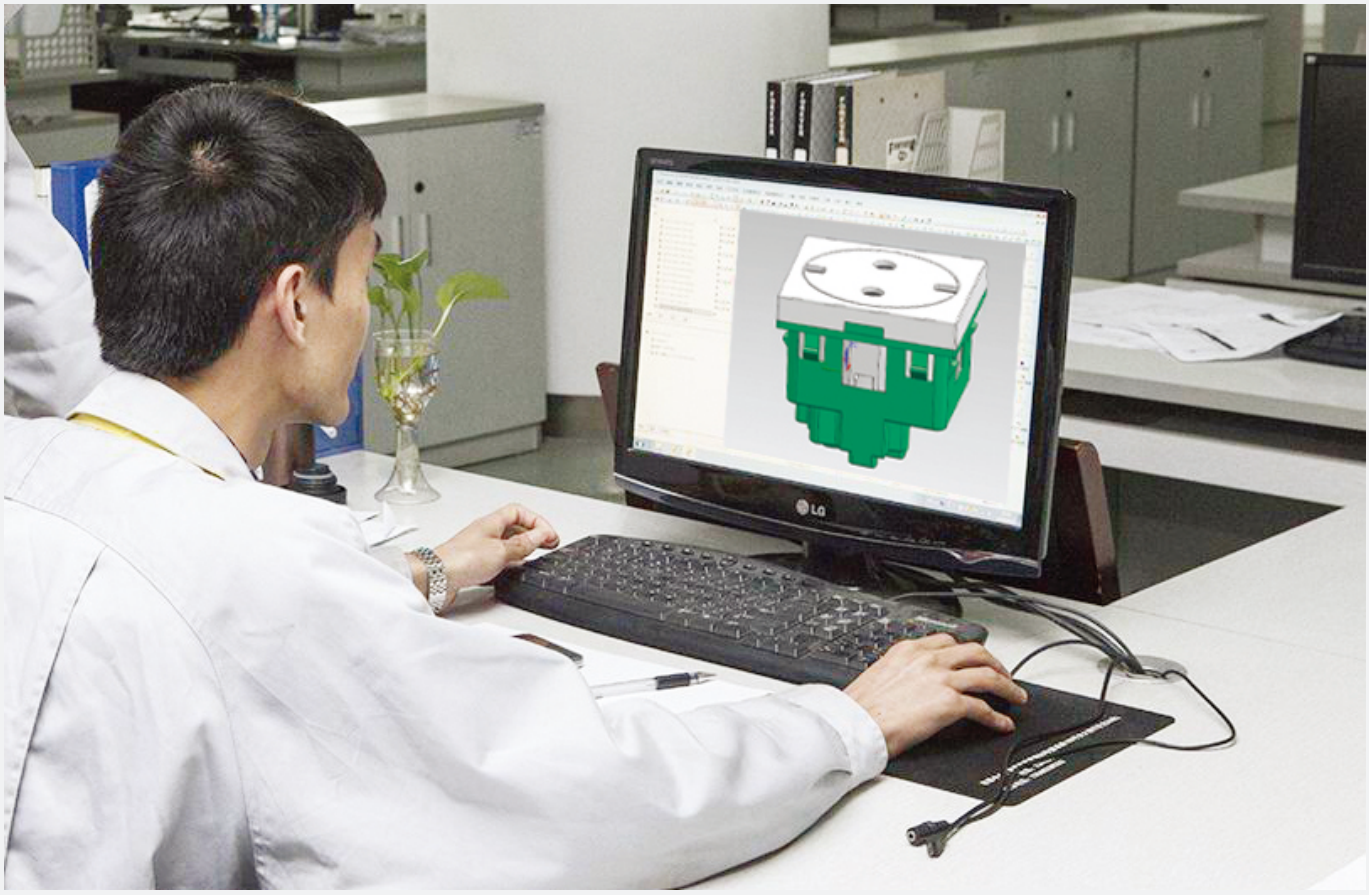

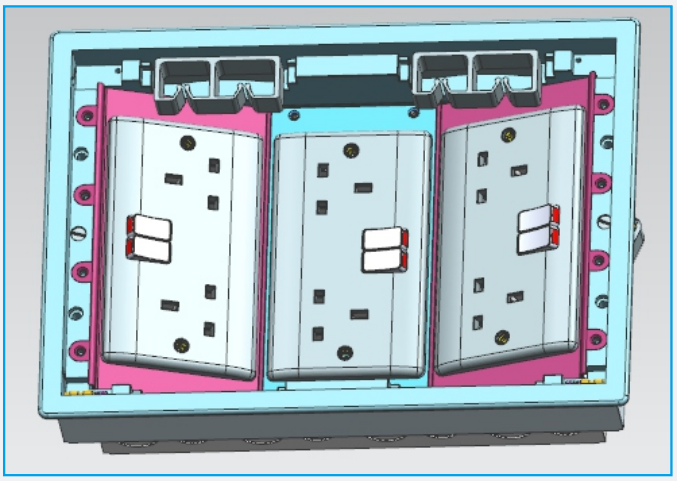

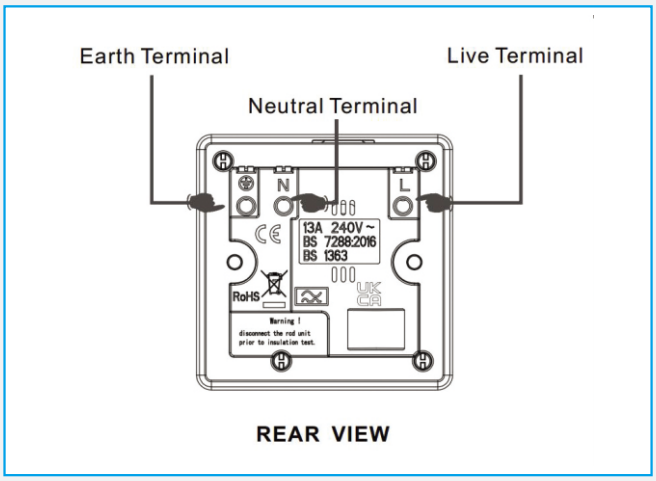

Exhibition

Local & Overseas Project Application

Shanghai World Expo China Pavilion

Shanghai World Expo China Shipbuilding Pavilion

Zhuhai Shibang Home Furnishing World

Nanjing Pearl River Building

China Customs

Nanjing Civil Defense Building

Nanjing HSBC Building

Kunming Hongcheng Scitech Shopping Center

Beijing Huaxia Bank Head Office

Henan Science Technology Museum

Beijing Tianyin Building

Qingdao Laixi Power Supply Bureau

Beijing Oriental Plaza

Shanghai Branch of the Political College of Nanjing Military Command

Shanghai Tianci Service Apartment

Yueqing Civic Activity Center

Yueqing City Administration Center

Ericsson Chongqing Economic Development Zone Plant

Dalian Airport

Nanjing Pearl River Building

1. Dubai Airport

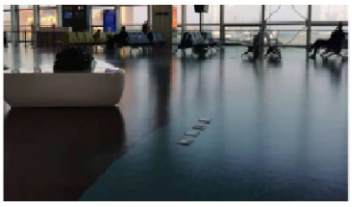

Product picture

2. Paraguay Flooring in bank

3.National University of Singapore

4.Bank in Africa office furniture

5.Malaysia Kuala Lumpur TRX Shopping Plaza & Roof Garden



6.Kazakhstan factory flooring



This is not including Non-Disclose Agreement Project

GUARANTEE OF AFTER-SALE SERVICE

Safewire Electric Co.,Ltd assure that our products are strictly in accordance with the ISO management system ,now we guarantee our products after-sale service as this following :

1 Our company guarantees that the products will be strictly inspected before shipped from factory and the QA rate of products will 100%.
2 Our company guarantees that within 1 year from date of receipt and finish installation if some problems occure, our company is responsible for replace free of charge.If beyond warranty period, we will provide you with corresponding paid services within a reasonable range.
3 Our electrical accessories is guaranteed to give satisfactory performance for life provided the following conditions exist.
a.The accessory has been properly installed by a competent person.
b.The accessory has been installed in accordance with the wiring regulations and amendments in force at the time of installation, and that it has not been tampered with or subjected to improper or abnormal use.
4.This following statituation will be paid service:.
* exceeding the warranty period;
* failure to provide purchase evidence/documents;
* damage caused by failure to use or repair the product as required in the product manual (pay special attention to water inspur into, damage by drop or other not right way by people);
* if the customer repairs or disassemblesby himself or by other person who not authorizated by our company;
* damage caused by wiring with bad quality level communication cables;
*failureor damage of products caused by major force such as flood,fire,lightning, eather-quake etc.

When problems occur during the use of the product, our technical engineer will actively respond.Any problem of product quality ,our company will guarantee a clear reply or solution within reasonable time.

Remark: Safewire Electric Co.,Ltd reserves the right to modify, at any moment, in the consumer's best interests, the features and components of its products without prior notice.

Safewire Electric Co.,Ltd

Electrical Socket

Floor Socket

SCF Series

POP Series

MCS Series

SOB Series

FUS Series

Desktop Socket

WCD Series

VLD Series

PUD Series

FUD Series

SAFEWIRE

Collection

Distribution Box

Waterproof Box

Accessories

45/128 Series Modules

Switch Series

Others Accessories

Underfloor Box
Raised Floor Box

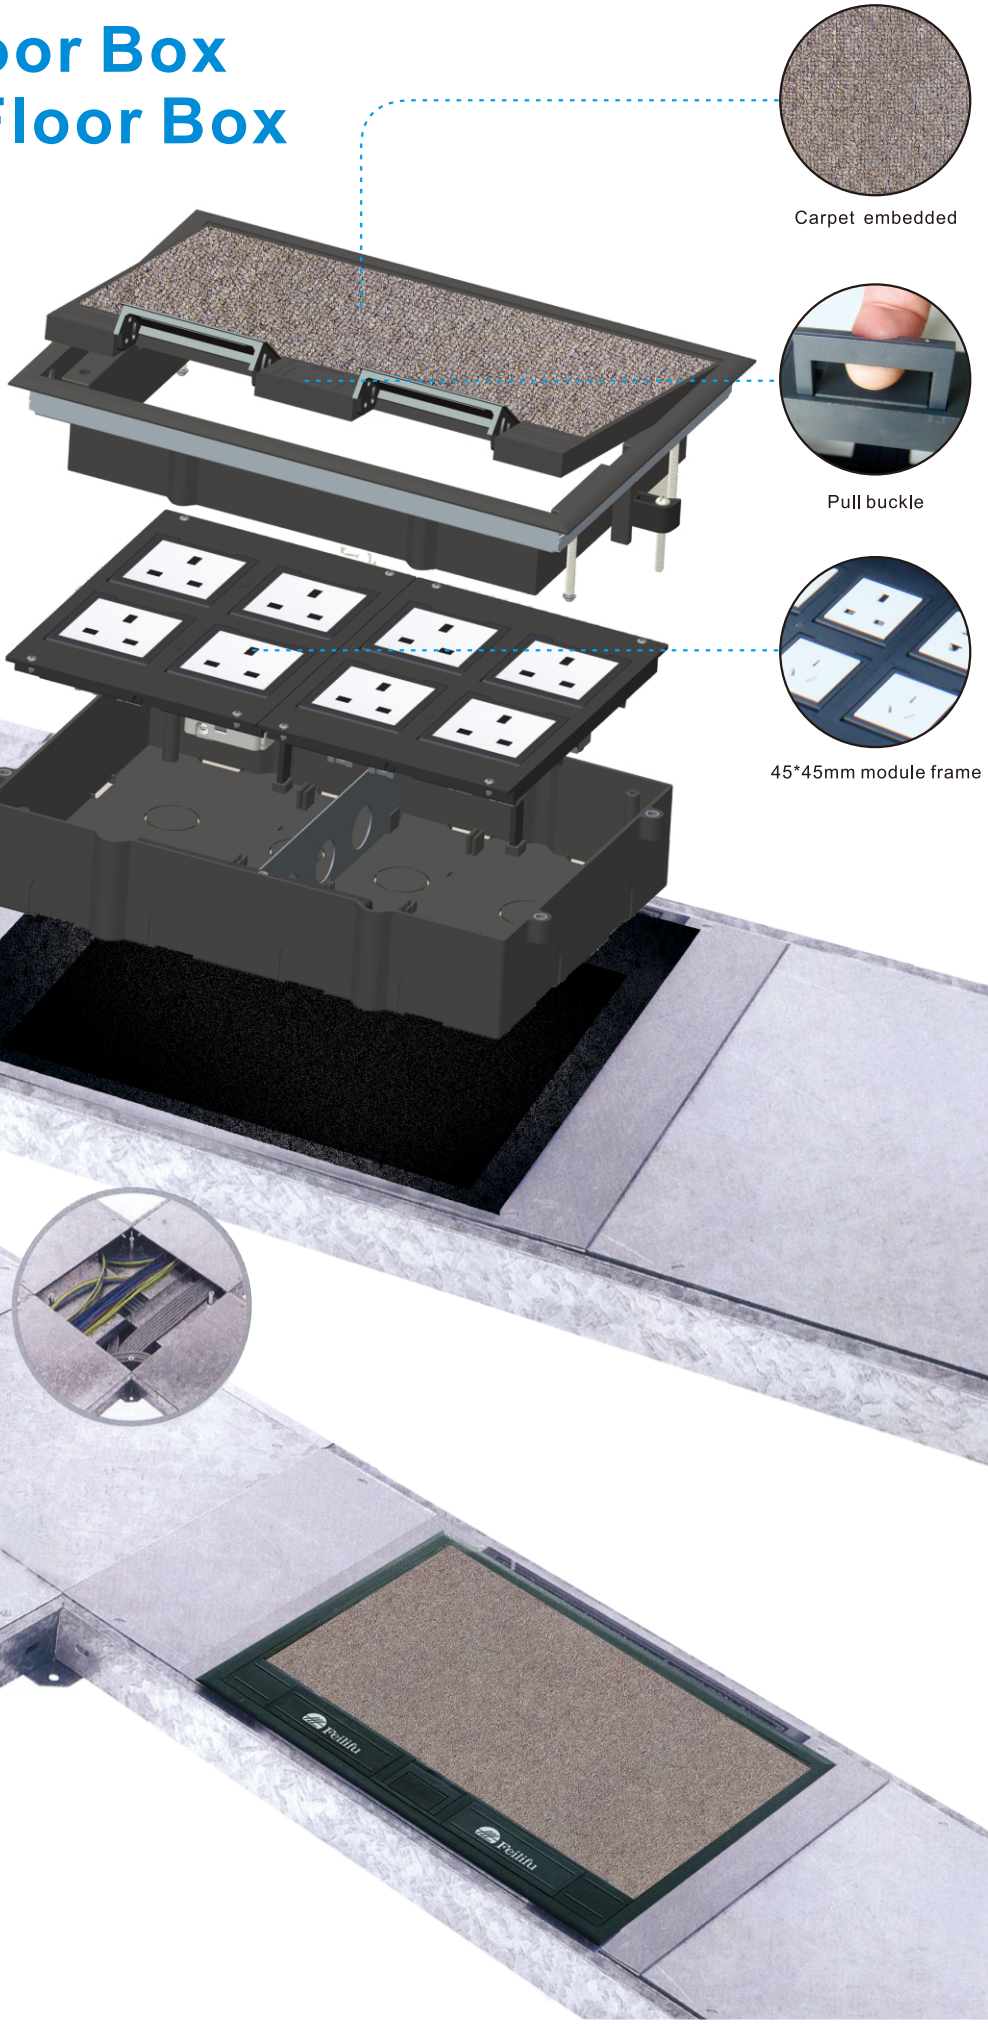

Features

8 Way Modules

12 Way Modules

16 Way Modules

24 Way Modules


Self Closing Lid

Rotating Ladder


Plastic / Galvanized / Stainless Bottom Box


Removable Coverplate

Adjustable Height


Optional Cover Plate

More Optional Switch & Socket Choice

120 Switch Board

86 Switch Board

86 Type Compartment

45*45mm Modules

Side-mounting 86 Board

More Optional installation

Hortonizal

Side-mounting

More Optional Under Floor Box For Concrete Floor / Raised Floor

Galvanized Steel

Plastic Bottom Box

Stainless steel Bottom Box

More Optional Surface with Carpet



Cover middle with 8mm concavity
Concave side can be installed with marble.


with marble

More Optional Coverplate


HTD-XXXAS
Cover middle can be filled


HTD-XXXSS
Filled with Plastic plate


HTD-XXXSP
Filled with SUS plate

1.Cable Management

1.1 Floor socket/underfloor box/ floor box
1.1.1SCF:Underfloor/Raised floor box

HTD-622AS/SS/SP-45

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm) (mm)	169*141.5	
Cutout (mm)	(130-135)*(157-165)*(76-110)	
Capacity Of Modules	8 ways 45modules	
Use	Raised floor	

Outline Drawing:

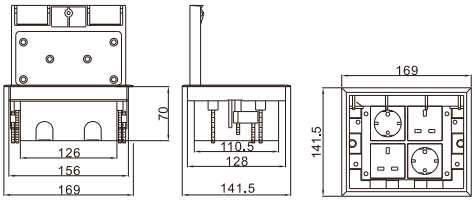

HTD-624AS/SS/SP-45

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	245*225	
Cutout (mm)	(210-215)*(230-235)*(76-110)	
Capacity Of Modules	12 ways 45modules	
Use	Raised floor	

Outline Drawing:

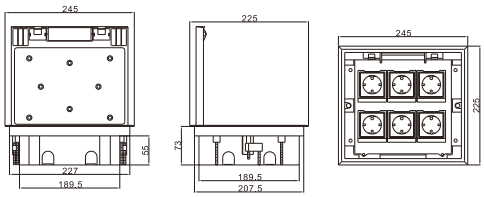

HTD-624C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)	245*225	
Cutout (mm)	(210-215)*(230-235)*(76-110)	
Capacity Of Modules	12 ways 45modules	
Use	Raised floor	

Outline Drawing:

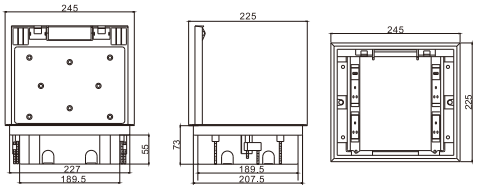

HTD-626AS/SS/SP-45

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		320.5*230.5
Cutout (mm)		(305-310)*(210-215)*(76-110)
Capacity Of Modules		16 ways 45modules
Use		Raised floor

Outline Drawing:

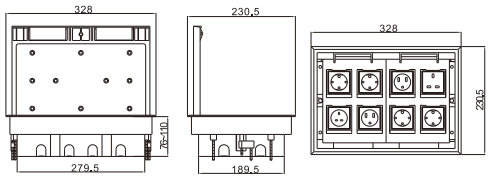

HTD-628AS/SS/SP-45

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		328*230.5
Cutout (mm)		(305-310)*(210-215)
Capacity Of Modules		16 ways 45modules
Use		Raised floor

Outline Drawing:

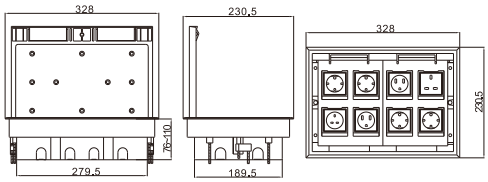

HTD-628AS/SS/SP-4524

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		328*230.5
Cutout (mm)		(305-310)*(210-215)
Capacity Of Modules		24 ways 45modules
Use		Raised floor

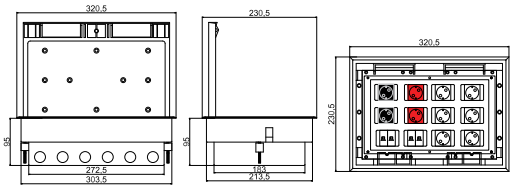

B-H628-C stainless box

HTD-628AS/SS/SP-C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		328*230.5
Cutout (mm)		(305-310)*(210-215)
Capacity Of Modules		16 ways 45modules
Use		Concrete floor

Outline Drawing:

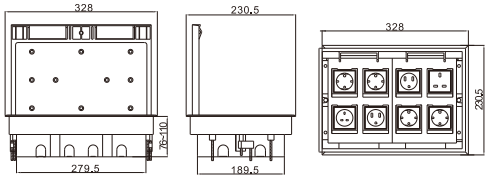



HTD-624AS/SS/SP-120

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		245*225
Cutout (mm)		(210-215)*(230-235)*(76-110)
Capacity Of Modules		128 type module*2
Use		Raised floor

Outline Drawing:

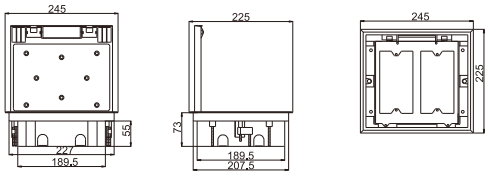

HTD-626AS/SS/SP-120

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		320.5*230.5
Cutout (mm)		(305-310)*(210-215)*(76-110)
Capacity Of Modules		128 type module*4
Use		Raised floor

Outline Drawing:

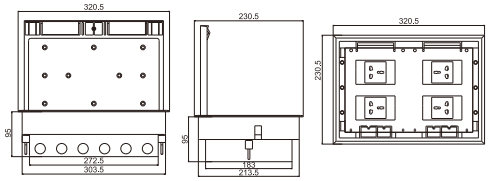

HTD-624AS/SS/SP-86

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		245*225
Cutout (mm)		(210-215)*(230-235)*(76-110)
Capacity Of Modules		86*86mm module socket *4
Use		Raised floor

Outline Drawing:

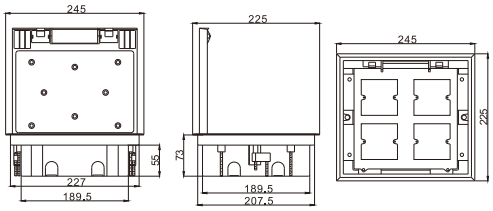

HTD-624B

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		245*225
Cutout (mm)		213*233
Capacity Of Modules		86*86mm switch socket*4
Use		Raised floor

Outline Drawing:

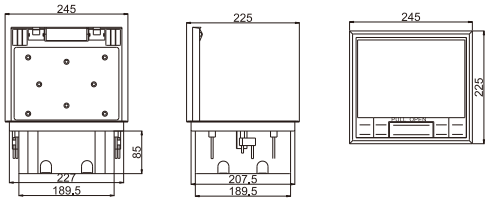

HTD-626AS/SS/SP-86

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		320.5*230.5
Cutout (mm)		(305-310)*(210-215)*(76-110)
Capacity Of Modules		6*146mm module socket *3
Use		Raised floor

Outline Drawing:

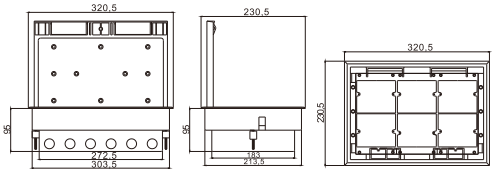



HTD-626B

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		320.5*230.5
Cutout (mm)		(305-310)*(210-215)*(76-110)
Capacity Of Modules		86*146mm module socket *3
Use		Raised floor

Outline Drawing:

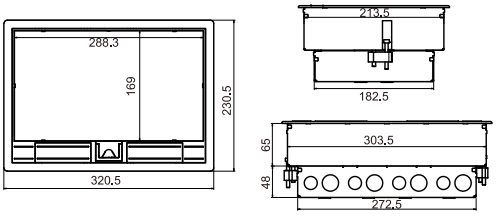

HTD-626RCD

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		320.5*230.5
Cutout (mm)		(305-310)*(210-215)*(76-110)
Capacity Of Modules		86*146mm RCD socket *3
Use		Raised floor

Outline Drawing:

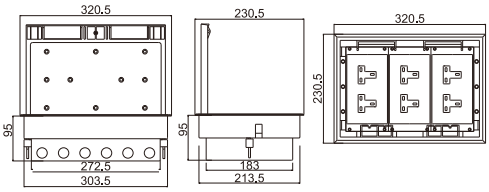

B-H622-C stainless box

HTD-622AS/SS/SP-C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		169*141.5
Cutout (mm)		(130-135)*(157-165)*(76-110)
Capacity Of Modules		8 ways 45modules
Use		Concrete floor

Outline Drawing:

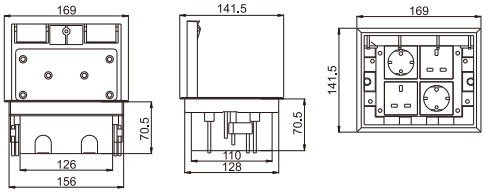



B-H624-C stainless box

HTD-624AS/SS/SP-C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		245*225
Cutout (mm)		(210-215)*(230-235)*(76-110)
Capacity Of Modules		12 ways 45modules
Use		Concrete floor

Outline Drawing:

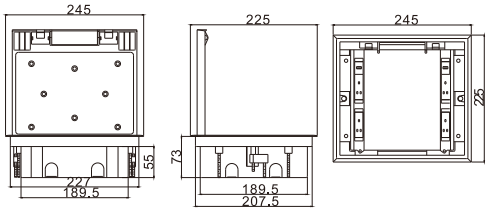



B-H626-C stainless box

HTD-626AS/SS/SP-C

Panel Material	AS	8mm Thickness of concavity
	SS	Plastic
	SP	Stainless Steel
Panel Dimension (mm)		320.5*230.5
Cutout (mm)		(305-310)*(210-215)*(76-110)
Capacity Of Modules		16 ways 45modules
Use		Concrete floor

Outline Drawing:

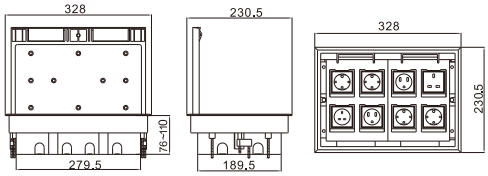

FACTA Class	En124 Class	GLW	Wheel Loads		Typical Applications	
		Gross laden Vehicli Weight (slow moving)	Wheel Loads*(slow moving)Pneumatic	Wheel Loads *(slow moving) Soild	Pneumatic Tyres	Solid Tyres
A	A15	Pedestrain duty	0.6 tonne(5KN)	N/A	Internal and external areas which can only be used by pedestrians or cycles ie. toilets, changing rooms, footways and cycle tracks	
AA	N/A	5 tonne	1.5 tonne(15KN)	N/A	Very light industrial areas, where small trolleys and private cars/ vans can manoeuvre i.e. Domestic driveways, trolley parks, hospital wards, underground car parks	
AAA	N/A	10 tonne	2.5 tonne(25KN)	0.5 tonne	Delivery/ service areas,shopping malls, light industrial areas	Light industrial areas,where trolleys and light pallet trucks operate
B	B125	Up to 44 tonne	5.0 tonne(25KN)	0.75 tonne	Pedestrian precincts,forecourts, commercial delivery/ parking areas	Factories, industrial plants, where pick-up trucks and small pallet trucks operate
C	C250	Up to 44 tonne but under special conditions	6.5 tonne(65KN)	1.0 tonne	Factories, industrial plants, special axle loads, kerb side drainage	Industrial areas where pallet and small forklift trucks operate
D	D400	Up to 44 tonne but under special conditions	11.0 tonne(108KN)	3.0 tonne	Heavy duty plant areas carriage -ways and industrial service roads where fast moving HGVs reach speeds of 32 km/h max	Heavy duty industrial areas where medium duty fork-lift trucks operate
E	E600	Special application vehicles	16.0 tonne(158KN)	5.0 tonne	Dockside and container storage areas where heavy transporters operate	Very heavy industrial areas where large heavy duty fork-lift trucks operate
F	F900	Special application vehicles	24.0 tonne(237KN)	N/A	Civil and military airfield aprons, where particularly heavy wheel loads are imposed by aircraft and towing vehicles	

*Slow moving wheel loads are deemed to be speeds no greater than 32 km/h.

Raised / Concreted / Thunking System Floor Box

For Flush Trunking Floor

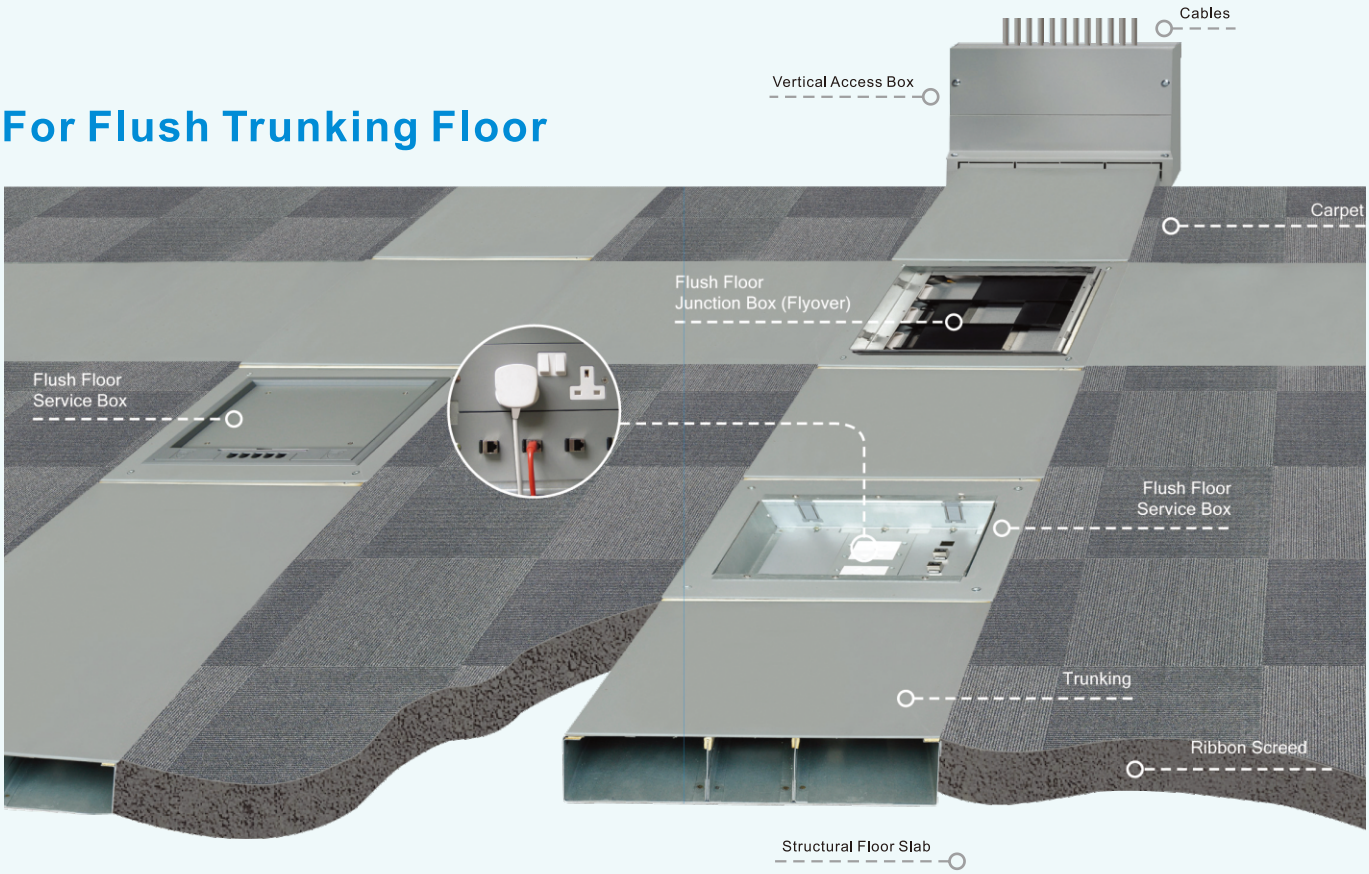

For Raised Floor







Features:

- Floor box manufactured from galvanized steel.
- 20mm knockouts to accept flexible conduit.
- Cavity depth 8~10mm.
- Galvanized lid insert for strength.
- Easy grip recessed lifting handle.
- Clamp fixing for fast installation.
- Large range of accessory plates.
- Special plates available to order.

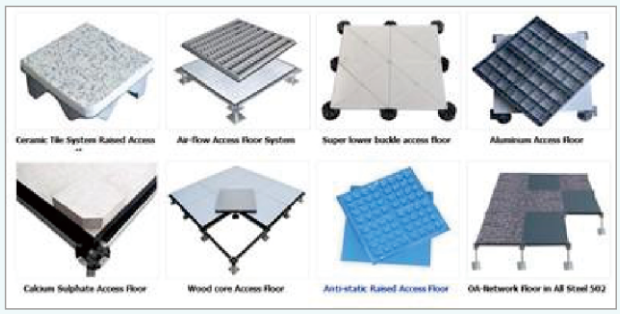

SCF-A01

Panel Material	PC
Panel Dimension (mm)	270x270
Cutout (mm)	264x264
Capacity Of Modules	3compartments/45mm

Outline Drawing:

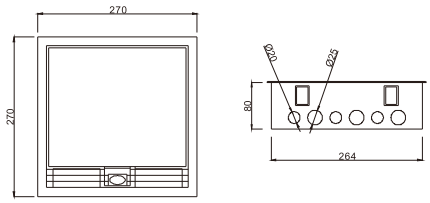

SCF-T01

Panel Material	PC
Panel Dimension (mm)	320x320
Cutout (mm)	264x264
Capacity Of Modules	3compartments/45mm

Outline Drawing:

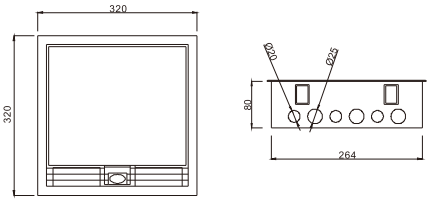

SCF-Q01

Panel Material	PC
Panel Dimension (mm)	273x273
Cutout (mm)	264x264
Capacity Of Modules	3compartments/45mm

Outline Drawing:

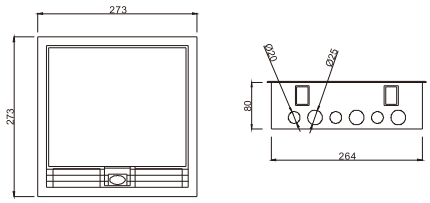

SCF-F01

Panel Material	PC
Panel Dimension (mm)	272x272
Cutout (mm)	264x264
Capacity Of Modules	3compartments/45mm

Outline Drawing:

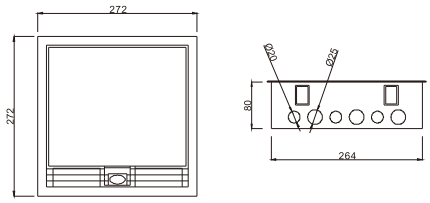

Available Popular Accessores

SCF-SSS
Two gang switch socket

SCF-SSB
13A british with support

M-NE-182
Low profile floor jack for RJ45 plug

M-NE-29
Low profile telephone jack

HTD-610S

Panel Material	ABS
Panel Dimension (mm)	Ø115
Cutout (mm)	80x80
Capacity Of Modules	3way 45modules

Outline Drawing:



SLB-86-01

Panel Material	Galvanized sheet
Panel Dimension (mm)	275*182*55
Cutout (mm)	78*184
Capacity Of Modules	86*146mm modules*3

Outline Drawing:

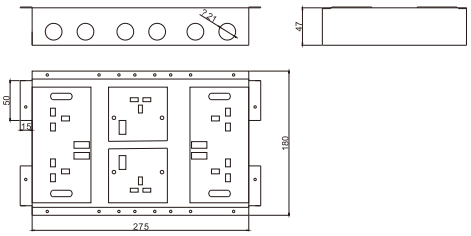

SLB-86-02



Panel Material	Galvanized sheet
Panel Dimension (mm)	362*182*55
Cutout (mm)	367*184
Capacity Of Modules	86*146mm modules*4

Outline Drawing:

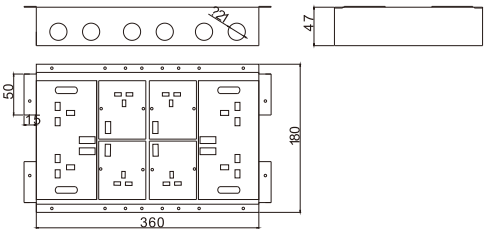

SLB-86-03



Panel Material	Stainless steel
Panel Dimension (mm)	210*110
Cutout (mm)	116*214
Capacity Of Modules	86*86mm modules*2

Outline Drawing:

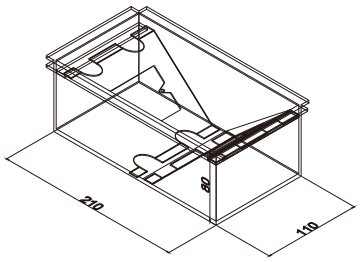

Junction Box/Power Box/Ground Tank

Raised Floor

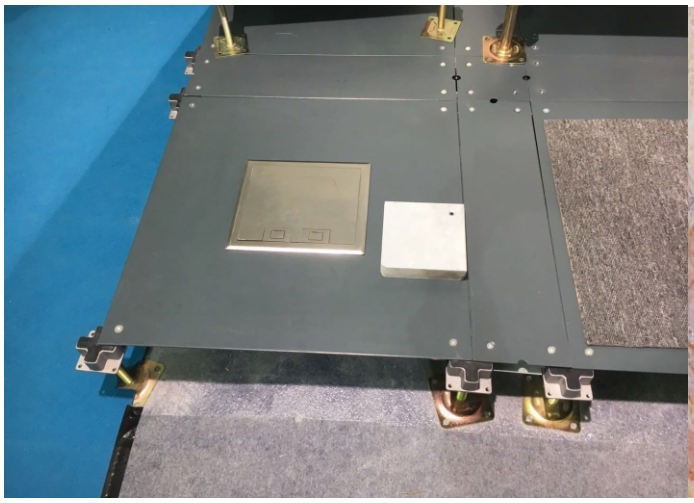

Concrete Floor

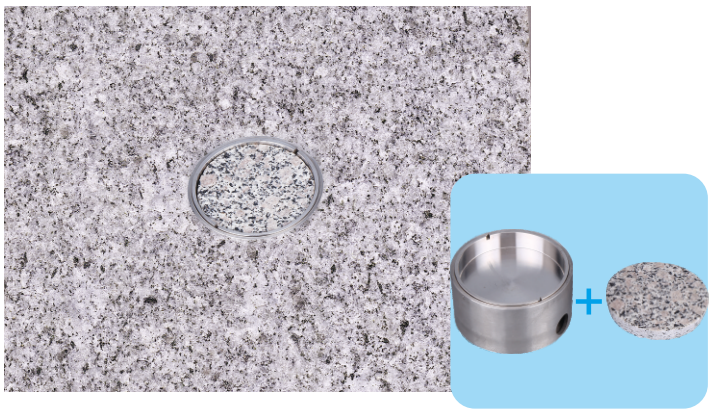

Cable Exit Protective Port



DK cable oulet fixing



HK cable outlet fixing

DK **DK Cable Exit Code:DK**

HK **HK Cable Exit Code:HK**

Lid/Coverplate

Novel design for panel, the top cover keeps parallel with floor (180°) when opening. Can be used for special plug socket or more plugs at the same time. It can avoid fallback of cover when taking power (information),which improves the security for product during using.

NK

Flat open
Code:NK

Panel and cover keep parallel

The lid can be opened at 112.5° and 180°

Material: Brass

P

Material:
Stainless steel



CKD/SKD is welcome!

Cover Plate

Bottom Box

Bridge & Support:

Access floor & Heavy duty Recess floor

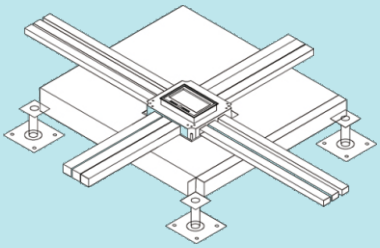



Flush-mounting & Recess-mounting

Recess-mounting

Flush-mounting

Customazation design



①Dimension



②Height



③Cavity(deepth)



④Plug clearance
(Height of lid to support)

⑤Configuration



A)MCB +CEE socket

F4

F11B

F15B

F16B

B)45*45mm module socket

HT-146TS

C)Switch socket

HT-86SS

D)Consigned Electric Allessores
by client Example

COMMSCOPE®

CRESTRON

Extron

1.Cable Management

1.1 Floor socket/underfloor box/ floor box
1.1.2 POB: Heavy Duty Floor box

HTD-120K/KP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	120*120
Cutout (mm)	113*113
Capacity Of Modules	3 ways 45 modules

Outline Drawing:

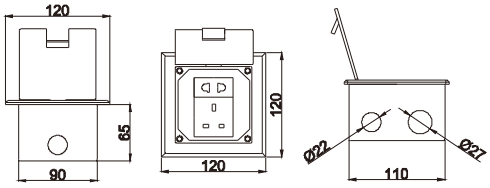

HTD-146K/KP-86

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	146*146
Cutout (mm)	138*138
Capacity Of Modules	86*86mm modules

Outline Drawing:

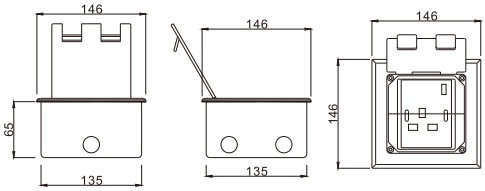

HTD-145CK-CKP



Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	210*145
Cutout (mm)	203*138
Capacity Of Modules	8 ways 45 modules

Outline Drawing:

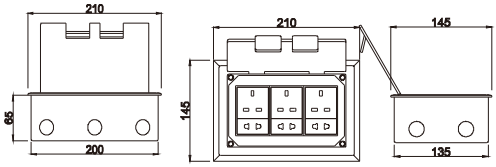

HTD-145K/KP



Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	210*145
Cutout (mm)	203*138
Capacity Of Modules	9 ways 45 modules

Outline Drawing:

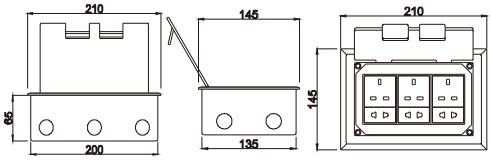

HTD-146K/KP



Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	146*146
Cutout (mm)	138*138
Capacity Of Modules	6 ways 45 modules

Outline Drawing:

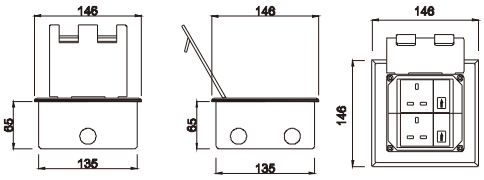

HTD-180K/KP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	180*180
Cutout (mm)	173*173
Capacity Of Modules	10 ways 45 modules

Outline Drawing:

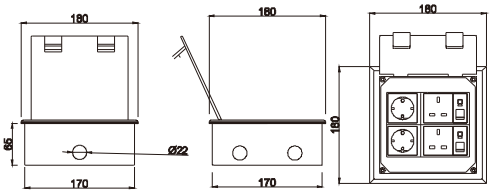

HTD-210CK/CKP



Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	210*210
Cutout (mm)	198*198
Capacity Of Modules	10 ways 45 modules

Outline Drawing:

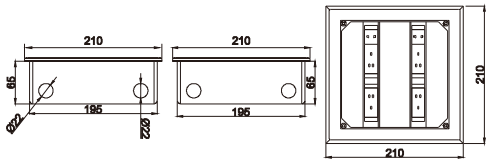

HTD-210K/KP-86



Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	210*210
Cutout (mm)	198*198
Capacity Of Modules	86*86mm modules

Outline Drawing:

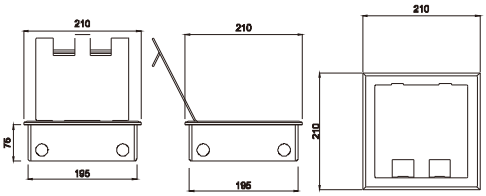

HTD-210K/KP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	210*210
Cutout (mm)	202*202
Capacity Of Modules	15 ways 45 modules

Outline Drawing:

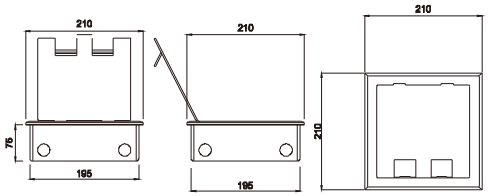

HTD-250K/KP-86

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	250*250
Cutout (mm)	232*202
Capacity Of Modules	3*2gang compartments switch socket

Outline Drawing:

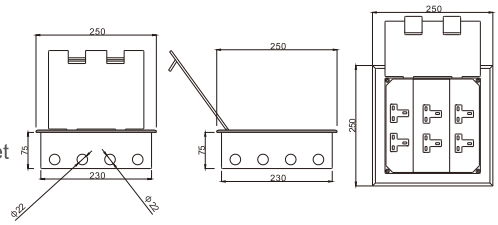

HTD-250K/KP



Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	250*250
Cutout (mm)	233*233
Capacity Of Modules	18 ways 45 modules

Outline Drawing:

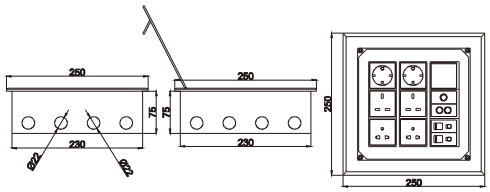

HTD-2702K/KP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	270*146
Cutout (mm)	263*138
Capacity Of Modules	12 ways 45 modules

Outline Drawing:

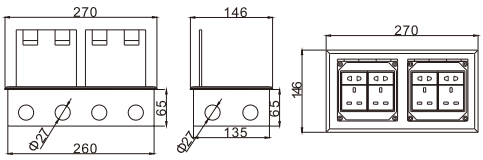



HTD-300K/KP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	300*150
Cutout (mm)	293x143
Capacity Of Modules	12 ways 45 modules

Outline Drawing:

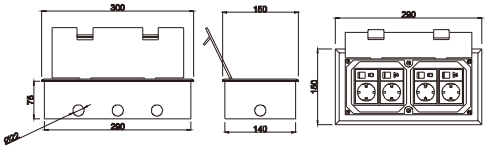

HTD-320K/KP-86

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	320*230
Cutout (mm)	302*212
Capacity Of Modules	4*2gang compartments switch socket

Outline Drawing:

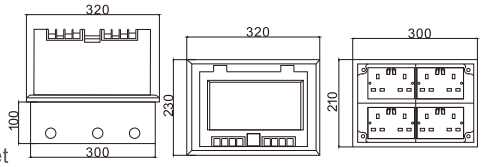



HTD-250CK

Panel Material	Stainless steel
Panel Dimension (mm)	250*250
Cutout (mm)	245*245
Capacity Of Modules	side-mounting gangs

Outline Drawing:

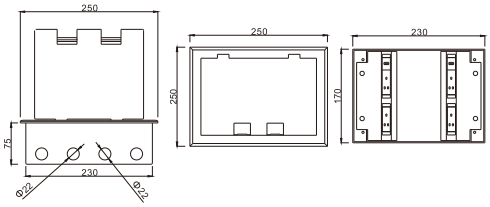

HTD-130-CK

Panel Material	Stainless steel
Panel Dimension (mm)	130*130
Cutout (mm)	130*130
Capacity Of Modules	3*45typeor1*86type outltets

Outline Drawing:



HTD-127ZAP

Panel Material	Stainless steel
Panel Dimension (mm)	127*127
Cutout (mm)	125*125
Capacity Of Modules	3 ways modules

Outline Drawing:

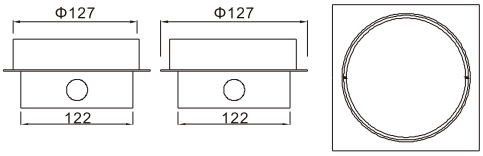

HTD-130LK/LXP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	ϕ130
Cutout (mm)	122*122
Capacity Of Modules	2 ways modules

Outline Drawing:

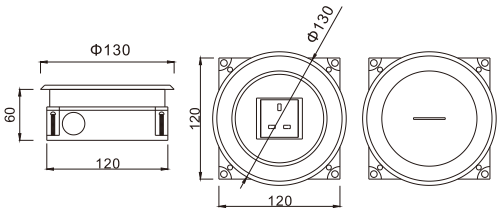

HTD-120E

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	dia.120
Cutout (mm)	120*120*60
Capacity Of Modules	2 ways modules

Outline Drawing:

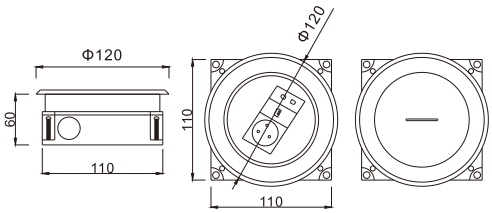

HTD-140YK/YKP

Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	Φ140
Cutout (mm)	125*125
Capacity Of Modules	2 ways modules

Outline Drawing:

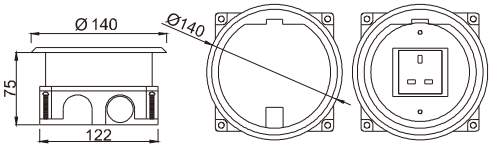

HTD-160LX

Panel Material	Brass alloy/Sta
Panel Dimension (mm)	Φ160
Cutout (mm)	148*148
Capacity Of Modules	2 ways modules

Outline Drawing:

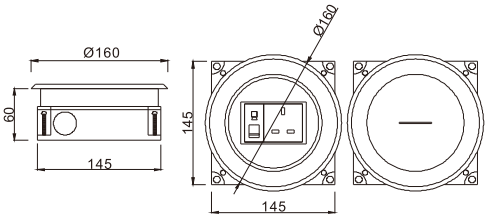

HTD-120-AV

Panel Material	Stainless Steel
Panel Dimension (mm)	120*120
Cutout (mm)	103*103
Capacity Of Modules	Customization AV socket



HTD-220-AV

Panel Material	Stainless Steel
Panel Dimension (mm)	220*220
Cutout (mm)	210*210
Capacity Of Modules	Customization AV socket

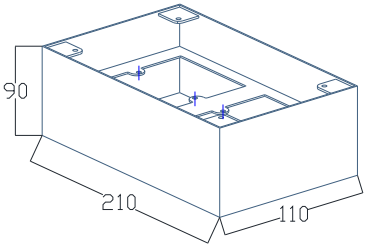

HTD-230-AV

Panel Material	Stainless Steel
Panel Dimension (mm)	230*230
Cutout (mm)	220*220
Capacity Of Modules	Customization AV socket

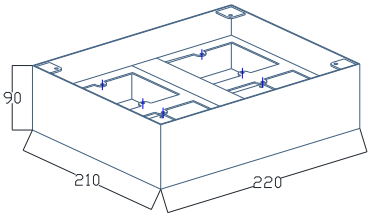

HTD-28L-AV

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	146*146
Cutout (mm)	1123*123
Capacity Of Modules	4 ways modules

Outline Drawing:

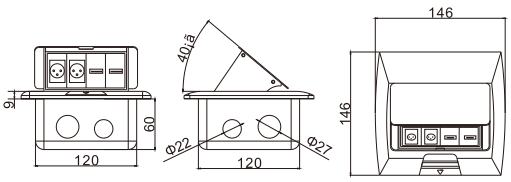

HTD-210-AV

AS Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	210*210
Cutout (mm)	198*198
Capacity Of Modules	15 ways modules

Outline Drawing:

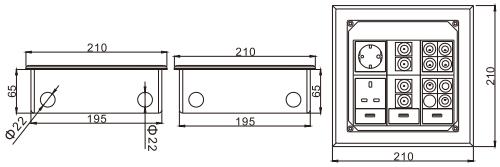

HTD-250-AV

AS Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	250*250
Cutout (mm)	233*233
Capacity Of Modules	18 ways modules

Outline Drawing:

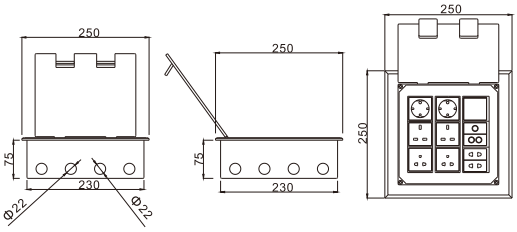

Aluminum alloy 86 wire drawing panel

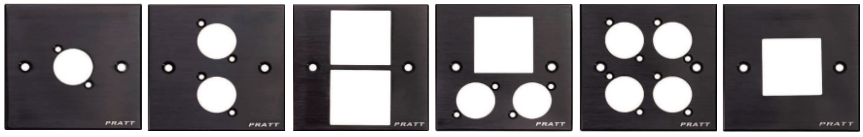

S601 S602 S603 S604 S605 S606

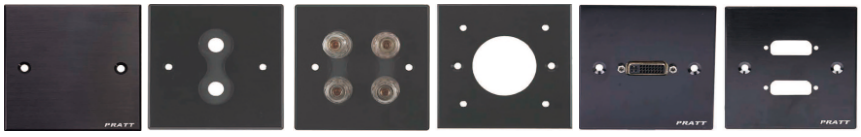

S607 S608 S609 S610 SDVI-1 SDVI-2

Stainless steel 86 panel

S601-T S602-T

S603-T S604-T

1.Cable Management

1.1 Floor socket/underfloor box/ floor box
1.1.2 POB: CEE Socket

HTD-140-I

AS Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	Φ140
Cutout (mm)	125*125
Capacity Of Modules	2 ways modules

Outline Drawing:





HTD-180-I

AS Panel Material	Stainless steel or brass
Panel Dimension (mm)	180*180
Cutout (mm)	180*180
Capacity Of Modules	MCB + Industrial socket

Outline Drawing:

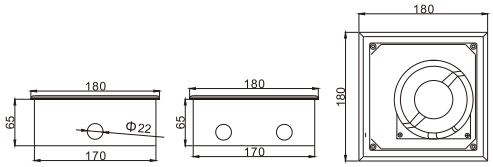

HTD-146-I

AS Panel Material	Stainless steel or brass
Panel Dimension (mm)	146*146
Cutout (mm)	146*146
Capacity Of Modules	2 * IP66 Low pressure socket

Outline Drawing:

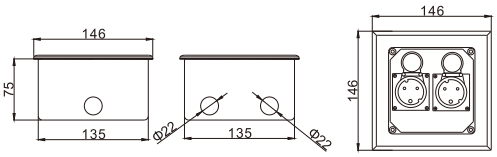

FZ-S66-I

AS Panel Material	Stainless Steel
Panel Dimension (mm)	IP66
Cutout (mm)	Two side
Capacity Of Modules	8* Industrial socket

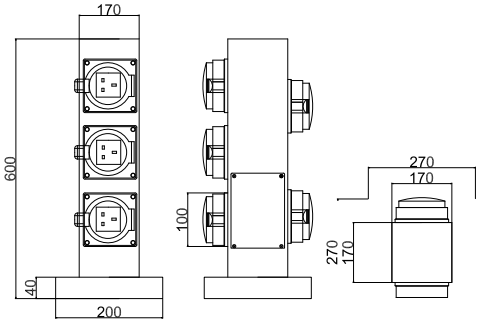

SOB: Serviced Outlet Box



- 3 ways/4 ways/6 ways/8 ways module socket to be installed.
- Stainless Steel Color/Black Color/ Aluminum Alloy Color/Copper Color /White Color
- 45/128 type module socket.

1.Cable Management

1.1 Floor socket/underfloor box/ floor box
1.1.4 SOB:Serviced Outlet BOx

FD201/201L

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	120*120
Cutout (mm)	105*105
Capacity Of Modules	3 ways modules

Outline Drawing:

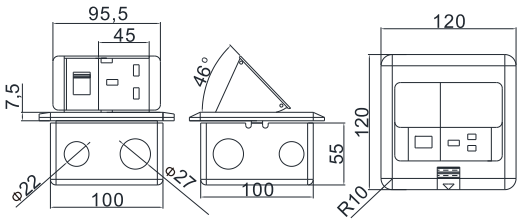

FD-221

AS Panel Material	Brass alloy
Panel Dimension (mm)	120*120
Cutout (mm)	103*103
Capacity Of Modules	3 ways modules

Outline Drawing:

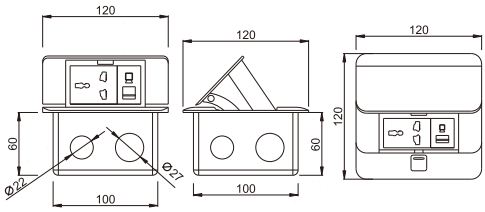

HTD-1/1L

AS Panel Material	Brass alloy
Panel Dimension (mm)	120*120
Cutout (mm)	120*120
Capacity Of Modules	3 ways modules

Outline Drawing:

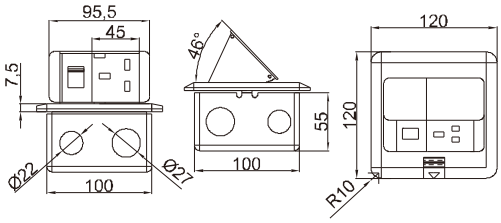

HTD-2/2P

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	120*120
Cutout (mm)	105x105
Capacity Of Modules	3 ways modules

Outline Drawing:

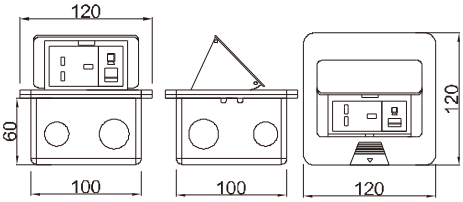

HTD-3/3P

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	Ø150
Cutout (mm)	105*105
Capacity Of Modules	3 ways modules

Outline Drawing:

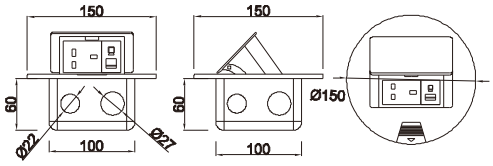

HTD-7/7L

AS Panel Material	Brass alloy/Stainless alloy
Panel Dimension (mm)	Ø150
Cutout (mm)	103*103
Capacity Of Modules	3 ways modules

Outline Drawing:

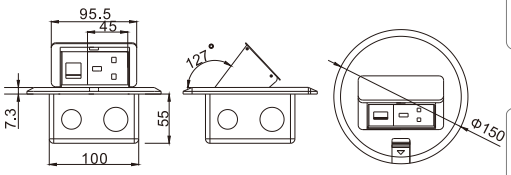

HTD-18/18L

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	128*120
Cutout (mm)	103*103
Capacity Of Modules	3 ways modules

Outline Drawing:

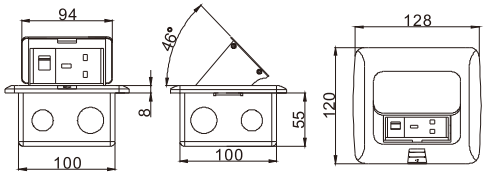

HTD-28/28L

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	154*146
Cutout (mm)	123*123
Capacity Of Modules	4 ways modules

Outline Drawing:

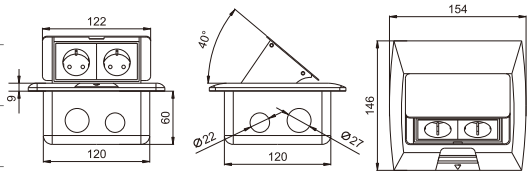

HTD-1602/1602L

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	220*120
Cutout (mm)	202x107
Capacity Of Modules	6 ways modules

Outline Drawing:

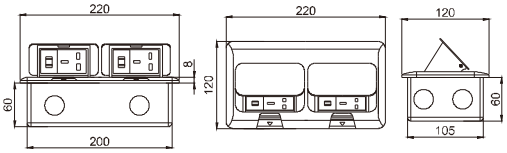

HTD-2602/2602L/W/B

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	270*147
Cutout (mm)	253*128
Capacity Of Modules	8 ways modules
Color	silver / golden / white / black

Outline Drawing:

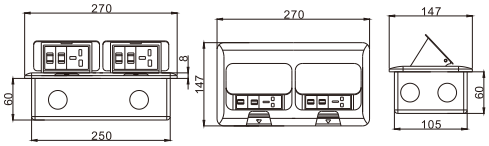

HTD-J02L

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	120*120
Cutout (mm)	105x105
Capacity Of Modules	GFCI module with USB port

Outline Drawing:

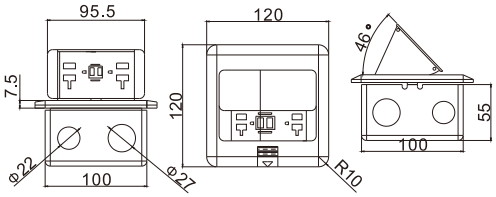

HTD-J02N

AS Panel Material	Bevelled square brass/Nickel chrome
Panel Dimension (mm)	146*146
Cutout (mm)	123x123
Capacity Of Modules	4 ways 45 type modules

Outline Drawing:

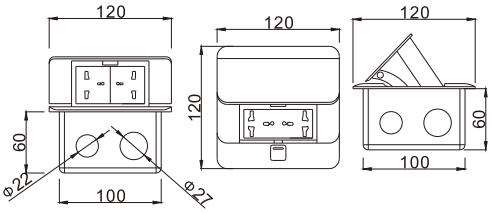

1.Cable Management

1.1 Floor socket/underfloor box/ floor box
1.1.5 FUS:Flip Up Socket

HTD-101/101P

AS Panel Material	Brass alloy/Stainless-Steel
Panel Dimension (mm)	81*102
Cutout (mm)	78*80
Capacity Of Modules	2 ways 45 modules

Outline Drawing:

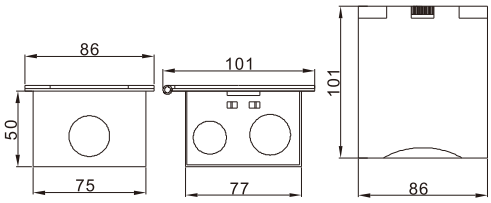

HTD-102/102P



AS Panel Material	Brass alloy/Stainless-Steel
Panel Dimension (mm)	147*102
Cutout (mm)	138x80
Capacity Of Modules	4 ways 45 modules

Outline Drawing:

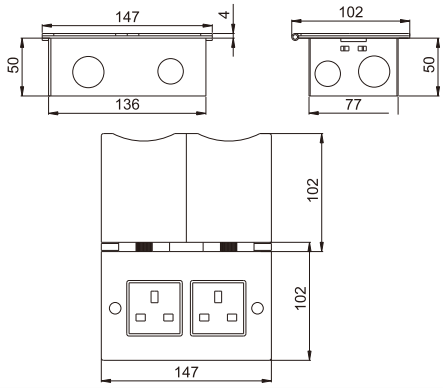

HTD-103C/103W

AS Panel Material	Zinc alloy
Panel Dimension (mm)	90*90
Cutout (mm)	77*80
Capacity Of Modules	3 ways 45 modules

Outline Drawing:

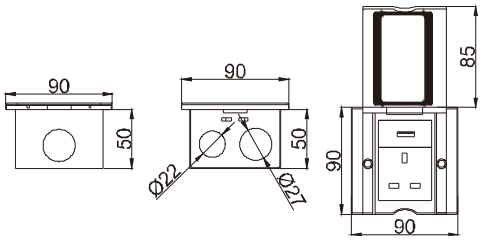

HTD-8/8P

AS Panel Material	Brass alloy/Alu alloy
Panel Dimension (mm)	125*125
Cutout (mm)	103*103
Capacity Of Modules	6 ways 45 modules

Outline Drawing:

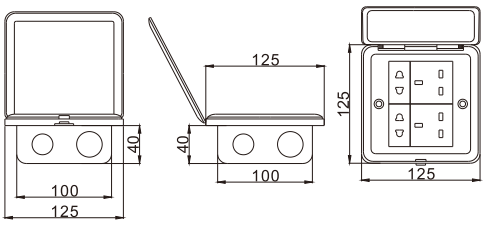

Wall Mounted Socket Series

More Protection

Polish material protect from oil and water

Say No

Oil

Water

Installation

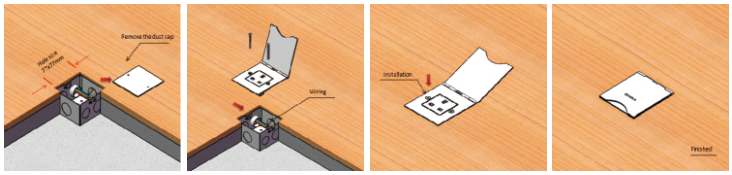

Bottom Box





HTD-13 Flip Up Socket

- Silver/Golden/Black Color
- 45/128 type module socket
- Double-sided clamshell
- Flush mounted

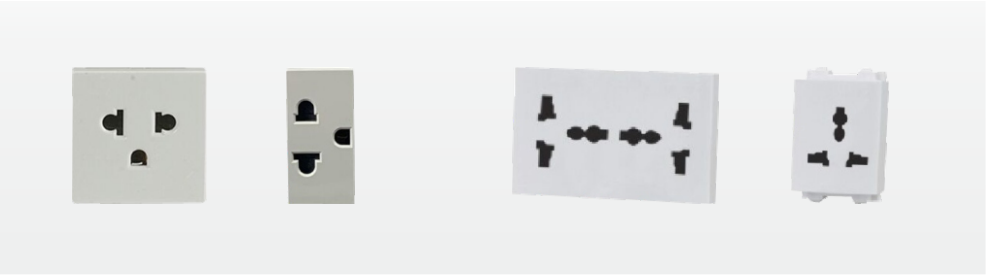

HTD-11/11P

AS Panel Material	Brass alloy/Stainless steel
Panel Dimension (mm)	120*120, or ϕ135mm
Cutout (mm)	105*105
Capacity Of Modules	3 ways 45 modules

Outline Drawing:



HTD-12

AS Panel Material	Round shape Brass H62/stainless 304
Panel Dimension (mm)	ϕ135mm
Cutout (mm)	105*105
Capacity Of Modules	3*45 type socket or 1* 128 type socket

Outline Drawing:



HTD-13

AS Panel Material	Alu alloy/Stainless steel
Panel Dimension (mm)	134*134
Cutout (mm)	122*122
Capacity Of Modules	6 ways 45 modules

Outline Drawing:



1.Cable Management

1.1 Floor socket/underfloor box/ floor box
1.1.3 MCS: Mini-Columns Socket & utility column

FZ-531A

Material	Aluminum alloy
Height Of Product(mm)	350
Power Supply Side	Single side
Capacity Of Modules	8 ways 45 modules

Outline Drawing:

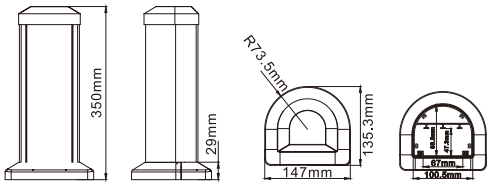

FZ-532A

Material	Aluminum alloy
Height Of Product(mm)	350
Power Supply Side	Single side
Capacity Of Modules	16 ways 45 modules

Outline Drawing:

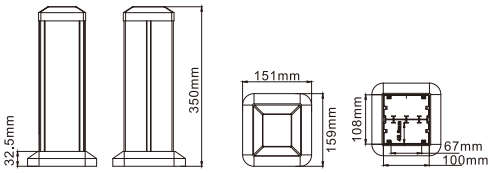

FZ-531B

Material	Aluminum alloy
Height Of Product(mm)	660
Power Supply Side	Dual side
Capacity Of Modules	14 ways 45 modules

Outline Drawing:

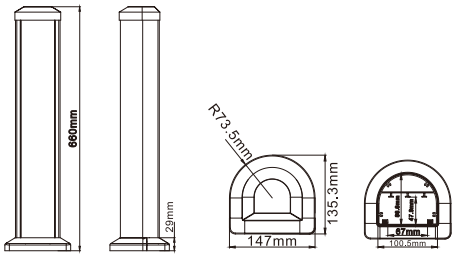

FZ-532B

Material	Aluminum alloy
Height Of Product(mm)	660
Power Supply Side	Dual side
Capacity Of Modules	14 ways 45 modules

Outline Drawing:

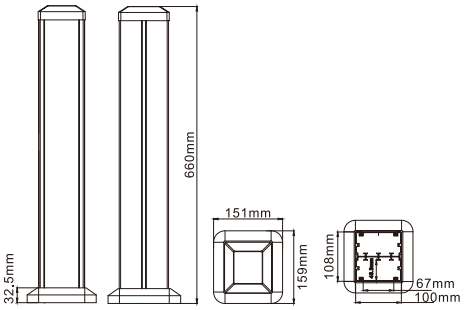

FZ-551

Material	Aluminum alloy
Height Of Product(mm)	1007
Bottom Base Size(mm)	240*240
Capacity Of Modules	20ways 45 modules

Outline Drawing:

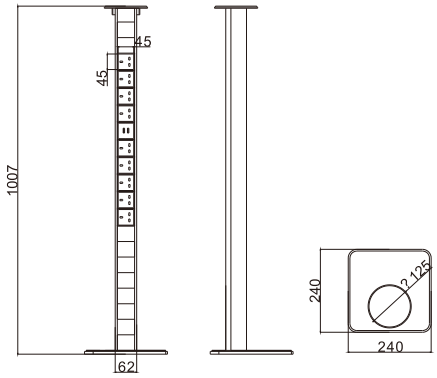

FZ-S66

Material	Stainless steel 304
Ip Protection Level	IP66
Power Supply Side	Two side
Capacity Of Modules	4 sockets +circuit breaker + surge protection

Outline Drawing:

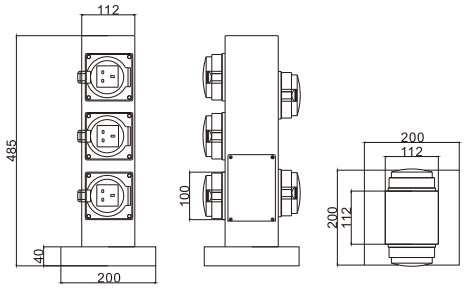

FZ-A66

Material	Stainless steel 304
Ip Protection Level	IP66
Power Supply Side	Two side
Capacity Of Modules	4 sockets +circuit breaker + surge protection

Outline Drawing:

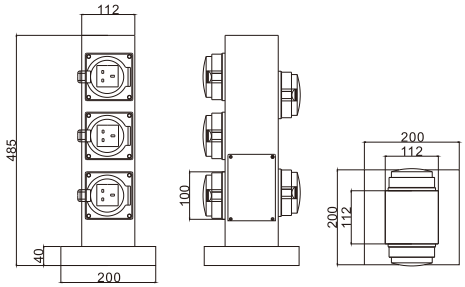

FD-777-A/AP

AS Panel Material	Brass alloy
Panel Dimension (mm)	143*136
Cutout (mm)	122*122
Capacity Of Modules	4 ways 45 modules

Outline Drawing:

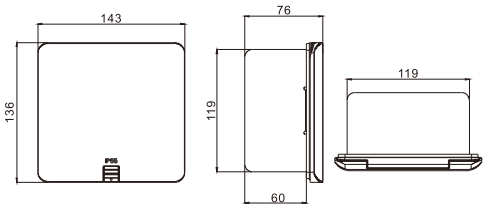

FD-777-B/BP

AS Panel Material	Brass alloy & nickel plated brass
Panel Dimension (mm)	143*136
Cutout (mm)	122*122
Capacity Of Modules	3 ways modules

Outline Drawing:

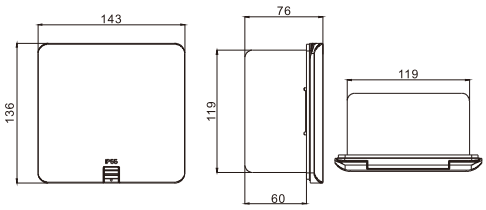

Office Furniture Socket OPDU/Table Modular

01 Multi scene Application

Smart Home

Kitchen

02 Customization

Material

Size

Parts

Colour

Configuration

Packing

03 International

Similar Legrand Mosaic / Arteor series

45

Similar Panasonic 128 type series

128



86/146 type module socket

86



5V 4.2A USB charger、HDMI、Cat6 , RCA , and so on



Wireless Charger Desktop

1.Cable Management

1.2 Desktop socket/Office furniture socket
1.2.1 WCD:Wireless Charger Desktop

FT-09W

Output	5V/1A 9V/1.1A
Voltage	110-240V
USB port	5V 1A (two port)
Materials	ABS
Charging Distance	8mm

Outline Drawing:



FT-10W

Output	5V/1A 9V/1.1A
Voltage	110-240V
Materials	aluminium alloy
Charging Distance	2-25mm

Outline Drawing:

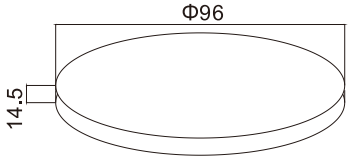

FT-12W

Output	5V/1A 9V/1.1A
Voltage	110-240V
Materials	ABS
USB port	5V/2A
Charging Distance	8mm

Outline Drawing:



FMF-18W

Output	5V/1A 9V/1.1A
PD output	18W
Voltage	110-240V
Materials	ABS
Describe	Mobile phone support + Wireless charging + two port USB

Outline Drawing:



FT-02W

USB charger output	5V 3.0A in Total 3 Ports, 5V 2.4A Maximum Per Port
Surge protection	300 Joule
Product dimension	92*79*68
AC outlet	US outlet/BS 13A socket /Universal socket

Outline Drawing:



FT-06W

Output Rate	15W
Input	Type C USB charger+DC input
Panel Dimension (mm)(mm)	Ø75mm
Color	white or black or OEM

Outline Drawing:

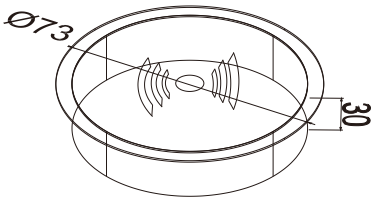

FT-07W

Output	5V/1A 9V/1.1A
Voltage	110-240V
Materials	Aluminum alloy +PC lens
Product size	Ø74 * 18mm
Charging Distance	8mm

Outline Drawing:



FT-08W

Output	5V/1A 9V/1.1A
Voltage	110-240V
Product size	Ø70* 24.5mm
Charging Distance	8mm

Outline Drawing:



Distribution Box
Waterproof Box
Accessories

FV-10W

Output	5V/1A 9V/1.1A
Voltage	110-240V
Materials	ABS + PC
Charging Distance	8mm
Describe	This is antivirus box with wireless charging, Disinfection of power is 5W,The time for disinfection can be 2 minutes or 5 minutes.

Outline Drawing:



FN-19W

Output rate	15W
Voltage	110-240V
Materials	space aluminum
Describe	Support Iphone, Apple Watch1, watch2,watch3,watch4.watch5,ect

Outline Drawing:



FN-20W

Output rate	18W
Voltage	110-240V
Materials	space aluminum
Describe	Support Iphone, Apple Watch1, watch2,watch3,watch4.watch5,ect

Outline Drawing:



FZ-521B-WF

Panel Material	Aluminum alloy
Panel Dimension (mm)	340*130
Cutout (mm)	328*116
Capacity Of Modules	9 ways 45*45mm modules

Outline Drawing:

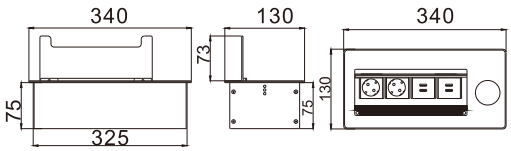

FZ-521S-WF

Panel Material	Aluminum alloy
Panel Dimension (mm)	340*130
Cutout (mm)	328*116
Capacity Of Modules	9 ways 45*45mm modules

Outline Drawing:

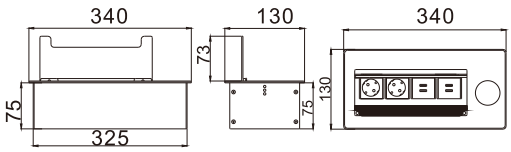

Kitchen and Official Furniture Liftable Vertical Sockt

1.Cable Management

1.2 Desktop socket/Office furniture socket
1.2.2 VLD:Vertical Liftable Desktop

FZ-VL-001

Panel Material	Aluminum 6063, PC zinc alloy
Surface finish	silver/black
Capacity of modules	16 ways 45*45mm Legrand's Mosaic modules
Describe	wireless charger & USB motorisedpop up with USB/bluetooth/outlets

Outline Drawing:

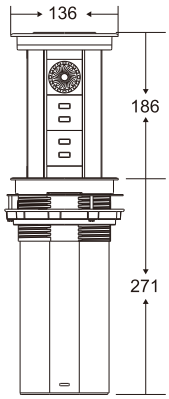

FZ-527E/W

Material	Aluminum 6063, PC zinc alloy
Optional color	silver/black
Capacity of modules	8 ways 45*45mm Legrand's Mosaic modules
Describe	wireless charger & USB motorisedpop up with USB/bluetooth/outlets

Outline Drawing:



FZ-527E/U

Material	Aluminum 6063, PC zinc alloy
Optional color	silver/black
Capacity of modules	8 ways 45*45mm Legrand's Mosaic modules
Describe	Motorised pop up with USB/bluetooth/outlets

Outline Drawing:



FZ-527B

Panel Material	Stainless
Surface finish	Painted/Oxygenated
Capacity of modules	6 ways 45*45mm modules
Describe	Cylindrical engineer popup with UsB/outlets

Outline Drawing:



FZ-527

Panel Material	Stainless
Surface finish	Painted/Oxygenated
Capacity of modules	8 ways 45*45mm modules
Describe	Pneumatic pop up with USB/outlets

Outline Drawing:



FZ-520

Panel Material	Zinc Alloy/Steel
Surface finish	Painted/Oxygenated
Capacity of modules	4~10 ways 45*45mm modules
Describe	Cylindricalliftable pop up with USB/outlets

Outline Drawing:

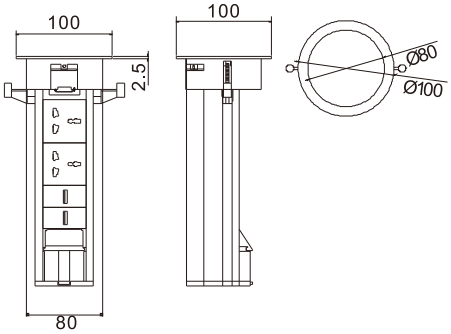

FZ-526-2

Panel Material	Aluminum 6063, PC zinc alloy
Surface finish	Painted/Oxygenated
Capacity of modules	2 ways 45*45mm modules
Describe	Cylindrical pop upwith USB/outlets

Outline Drawing:

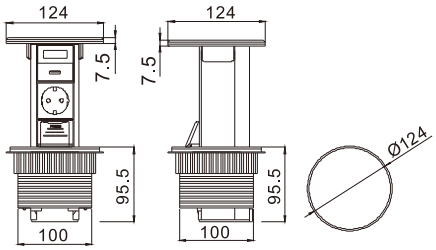

FZ-526-4

Panel Material	Aluminum 6063, PC zinc alloy
Surface finish	Painted/Oxygenated
Capacity of modules	4 ways 45*45mm modules
Describe	Cylindrical pop upwith USB/outlets

Outline Drawing:

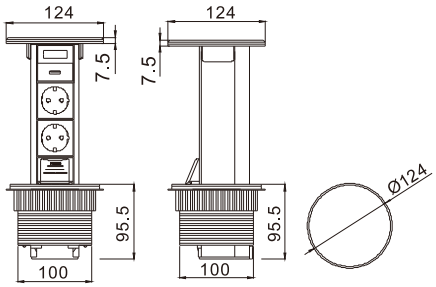

FZ-526-6

Panel Material	Aluminum 6063, PC zinc alloy
Surface finish	Painted/Oxygenated
Capacity of modules	6 ways 45*45mm modules
Describe	Cylindrical pop upwith USB/outlets

Outline Drawing:

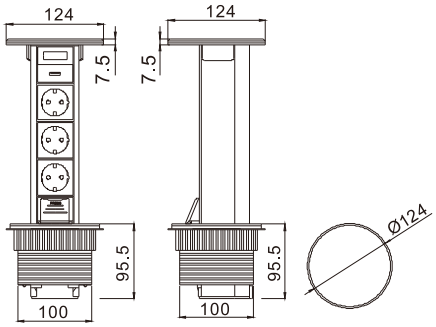

FZ-526-8

Panel Material	Aluminum 6063, PC zinc alloy
Surface finish	Painted/Oxygenated
Capacity of modules	8 ways 45*45mm modules
Describe	Cylindrical pop upwith USB/outlets

Outline Drawing:

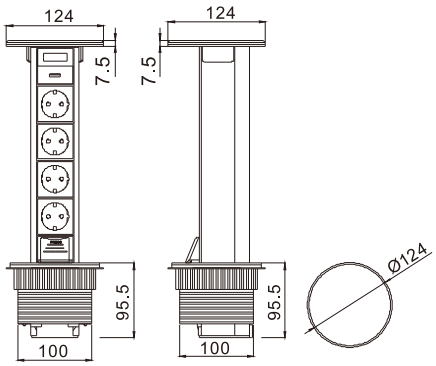

1.Cable Management

1.2 Desktop socket/Office furniture socket
1.2.3 PUD:Pop Up Desktop

FZ-517B

Panel Material	Aluminum alloy
Panel Dimension (mm)	240*120
Cutout (mm)	231*12
Capacity Of Modules	6 ways 45*45mm modules
Color	Black RAL9005

Outline Drawing:

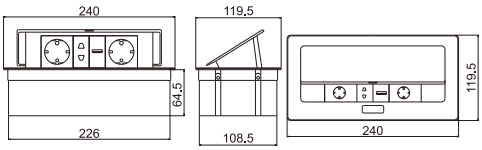

FZ-517W

Panel Material	Aluminum alloy
Panel Dimension (mm)	240*120
Cutout (mm)	231*112
Capacity Of Modules	6 ways 45*45mm modules
Color	White RAL9016

Outline Drawing:

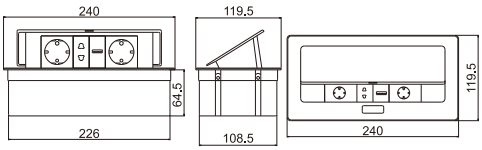

FZ-517S

Panel Material	Aluminum alloy
Panel Dimension (mm)	240*120
Cutout (mm)	231*112
Capacity Of Modules	6 ways 45*45mm modules
Color	White RAL9006

Outline Drawing:

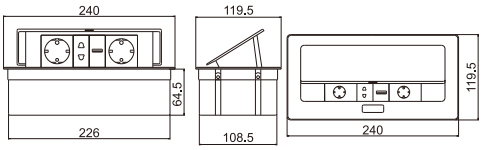

FZ-517H

Panel Material	Aluminum alloy
Panel Dimension (mm)	240*120
Cutout (mm)	231*112
Capacity Of Modules	6 ways 45*45mm modules
Color	Graphite black color RAL6009

Outline Drawing:

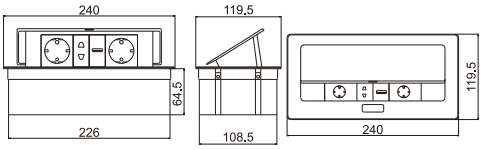

FZ-517G

Panel Material	Aluminum alloy
Panel Dimension (mm)	240*120
Cutout (mm)	231*12
Capacity Of Modules	6 ways 45*45mm modules
Color	Golden color RAL

Outline Drawing:

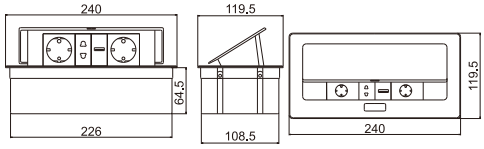

FZ-517N

Panel Material	Aluminum alloy
Panel Dimension (mm)	240*120
Cutout (mm)	231*112
Capacity Of Modules	6 ways 45*45mm modules
Color	Nickel Chrome color RAL6014

Outline Drawing:

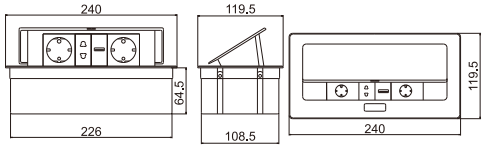

FZ-517-DN B/W/S

Panel Material	Aluminum alloy
Panel Dimension (mm)	266*118
Cutout (mm)	231*112
Capacity Of Modules	6 ways 45*45mm modules
Color	Black / White / Silver

Outline Drawing:

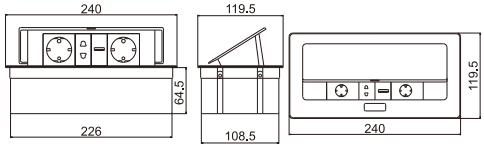

FZ-515B

Panel Material	Aluminum alloy
Panel Dimension (mm)	170*123
Cutout (mm)	148*115
Capacity Of Modules	4 ways 45*45mm modules
Color	Black

Outline Drawing:

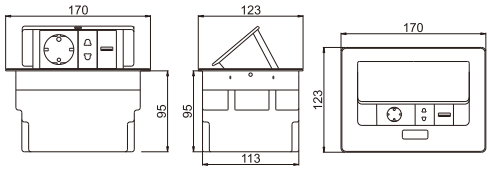

FZ-515S

Panel Material	Aluminum alloy
Panel Dimension (mm)	170*123
Cutout (mm)	148*115
Capacity Of Modules	4 ways 45*45mm modules
Color	Silver

Outline Drawing:

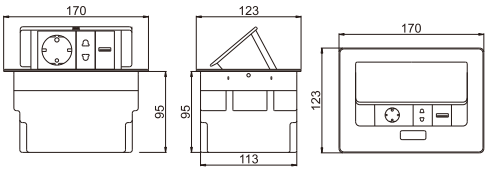

FZ-515W

Panel Material	Aluminum alloy
Panel Dimension (mm)	170*123
Cutout (mm)	148*115
Capacity Of Modules	4 ways 45*45mm modules
Color	White

Outline Drawing:

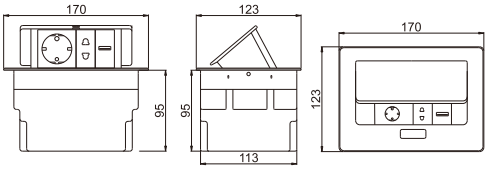

FZ-Z9-01

Panel Material	Aluminum
Panel Dimension (mm)	200*160*145
Cutout (mm)	170*130*115
Capacity Of Modules	Multifaceted mountable modules
Color	Black

Outline Drawing:

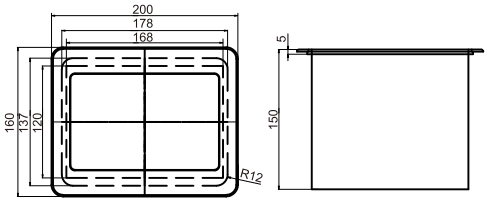

FZ-Z10-01

Panel Dimension (mm)	200*160*150
Cutout (mm)	190*150
Color	Black

Outline Drawing:

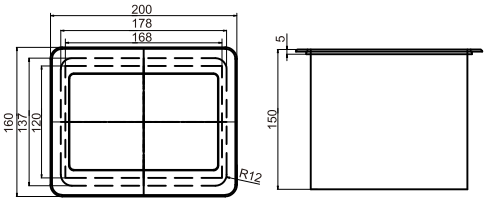

FZ-Z10-02

Panel Dimension (mm)	200*160*150
Cutout (mm)	190*150
Color	Black

Outline Drawing:

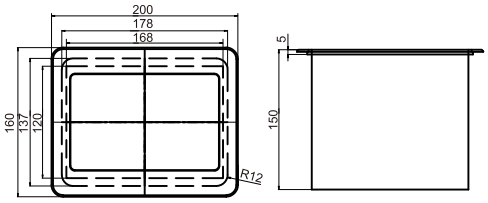

FZ-Z10-03

Panel Dimension (mm)	200*160*150
Cutout (mm)	190*150
Color	Black

Outline Drawing:

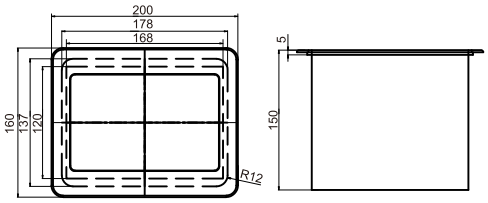

Do it now!
Sometimes
"Later"
becomes
"Never"

SAFEWIRE
Since 1998;20 years OEM factory for global brand

SAFEWIRE

Screen type

1.Cable Management

1.2 Desktop socket/Office furniture socket
1.2.4 CMD:Clamped Mounted Desktop

FZ-508

Panel Material	Aluminum alloy/Steel
Panel Dimension (mm)	256*60*45
Cutout (mm)	236*30*15
Capacity Of Modules	Max.9ways 45*45mm modules
Color	Silver / White

Outline Drawing:

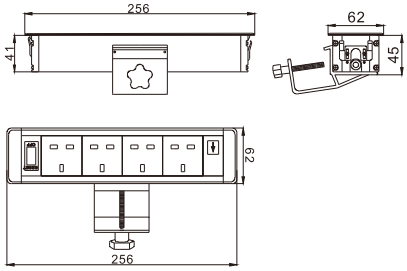

FZ-CK02

Panel Material	Aluminum
Panel Dimension (mm)	L*86d*87h mm
Cutout (mm)	(L-30)*80d mm
Capacity Of Modules	7 modules
Color	Silver / Black

Outline Drawing:



FZ-CK03

Panel Material	Aluminum
Panel Dimension (mm)	L*102d*103h mm
Cutout (mm)	(L-30)*106d mm
Capacity Of Modules	6.5 modules
Color	Silver / Black

Outline Drawing:



FZ-TB-W

Panel Material	Aluminum alloy/PC
Panel Dimension (mm)	200*63
Cutout (mm)	170*33
Capacity Of Modules	50*50mm black modules /45*45mm white modules
Color	White

Outline Drawing:



FZ-TB-B (black)

Panel Material	Aluminum alloy/PC
Panel Dimension (mm)	200*63
Cutout (mm)	170*33
Capacity Of Modules	50*50mm black modules /45*45mm white modules
Color	Black

Outline Drawing:



FZ-TB-A

Panel Material	Aluminum alloy/PC
Panel Dimension (mm)	200*63
Cutout (mm)	170*33
Capacity Of Modules	50*50mm black modules /45*45mm white modules
Color	Silver / Black
Describe	Flush-mounting with power cable

Outline Drawing:

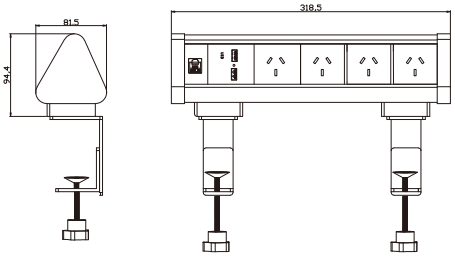

FZ-TB-A/P

Panel Material	Aluminum alloy/PC
Panel Dimension (mm)	200*63
Cutout (mm)	170*33
Capacity Of Modules	50*50mm black modules /45*45mm white modules
Color	Silver / Black
Describe	Flush-mounting with power cable / GST

Outline Drawing:

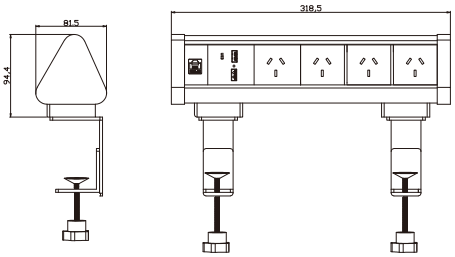

FZ-TB-A/G

Panel Material	Aluminum alloy/PC
Panel Dimension (mm)	200*63
Cutout (mm)	170*33
Capacity Of Modules	50*50mm black modules /45*45mm white modules
Color	Silver / Black
Describe	Flush-mounting with GST cable

Outline Drawing:

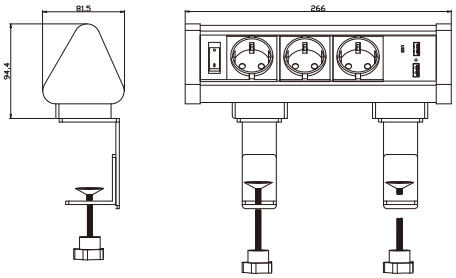

FZ-CK06

Panel Material	Aluminum
Panel Dimension (mm)	L*102d*103h mm
Cutout (mm)	(L-30)*106d mm
Capacity Of Modules	6.5 modules
Color	Silver / Black

Outline Drawing:



FA-1770-D

Panel Material	Fire-retardant ABS plastic
Panel Dimension (mm)	86.4*115*85
Cutout (mm)	70*100*70
Capacity Of Modules	2 ways (45*45mm)modules

Outline Drawing:

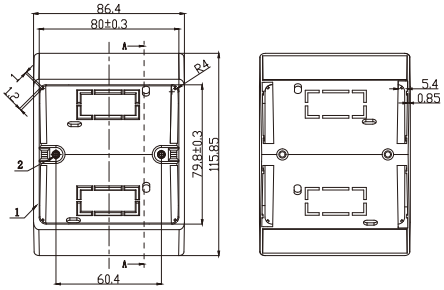

FA-1770-U

Panel Material	Fire-retardant ABS plastic
Panel Dimension (mm)	86.4*115*85
Cutout (mm)	70*100*70
Capacity Of Modules	2 ways (45*45mm)modules

Outline Drawing:

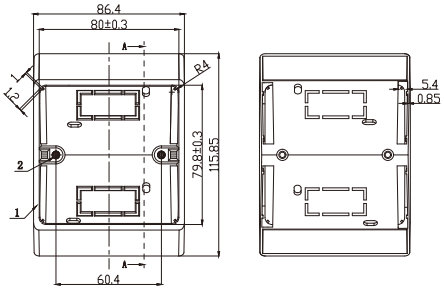

FA-2770

Panel Material	Fire-retardant ABS plastic
Panel Dimension (mm)	146.4*115*85
Cutout (mm)	120*95*65
Capacity Of Modules	4 ways (45*45mm)modules
Capacity of modules	4 ways (45*45mm) modules & 146*86 type socket

Outline Drawing:

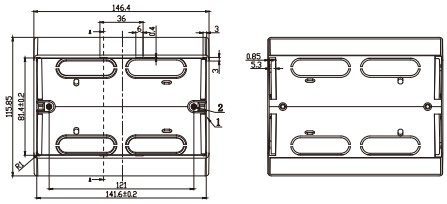

1.Cable Management

1.2 Desktop socket/Office furniture socket
1.2.5 CAP:Corner Aluminum Profile

SFGLC-2

panel material	Aluminum alloy
Feature	Usually used in the kitchen, hotel and so on
Capacity of modules	4 ways (45*45mm)modules
Color surface	Silver

Outline Drawing:

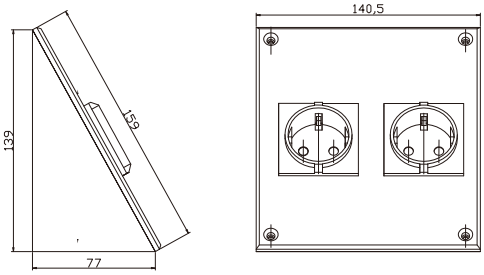

SFGLC-3

panel material	Aluminum alloy
Feature	Usually used in the kitchen, hotel and so on
Capacity of modules	6 ways (45*45mm)modules
Color surface	Silver

Outline Drawing:



FZ-ZSU3

Panel Material	ABS
Panel Dimension (mm)	320*67*68
Cutout (mm)	300*50*50
Capacity Of Modules	Max.9ways 45*45mm Legrand's Mosaic modules
Color surface	Black

Outline Drawing:



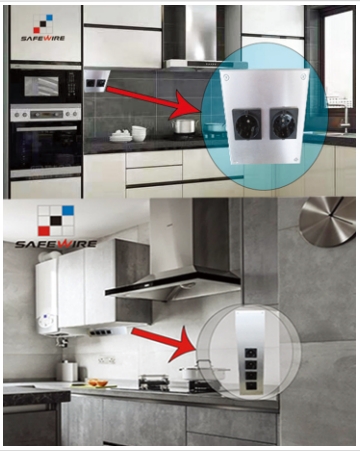

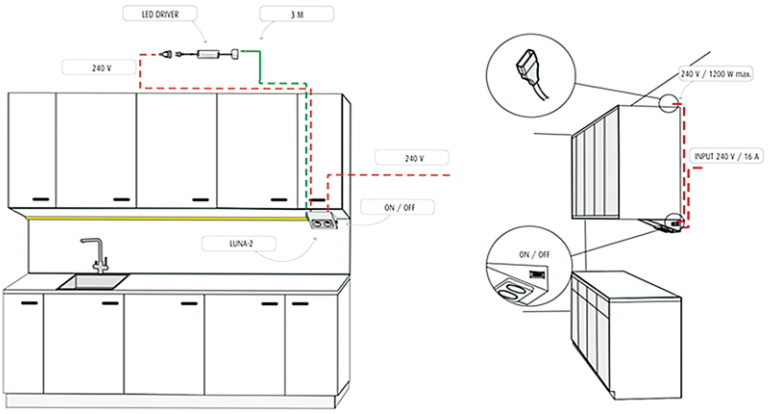

SFGLC86-1

Panel Material	Stainless Steel
Panel Dimension (mm)	86*86*40mm
Capacity of Modules	One 86*86mm Socket
Color	Champaign gold/Rose-bengal /black/Stainless steel silver

Outline Drawing:



SFGLC86-2

Panel Material	Stainless steel
Panel Dimension (mm)	86*171*40mm
Capacity of Modules	Two 86*86mm socket
Color	Champaign gold/Rose-bengal /black/Stainless steel silver

Outline Drawing:



SFGLC86-3

Panel Material	Stainless steel
Panel Dimension (mm)	86*258*40mm
Capacity of Modules	Three 86*86mm socket
Color	Champaign gold/Rose-bengal /black/Stainless steel silver

Outline Drawing:



RCD0130SPW
Single RCD plasticsocket, switched

HT-86SS
Duplex I Single gang switch socket, applicable in Safewire's BS standard86/146 type installation frame/bridges

SFGLC-1 H2110

1.Cable Management

1.2 Desktop socket/Office furniture socket
1.2.6 FMD:Flush Mount Desktop

FZ-CK01

Panel Material	Aluminum
Panel Dimension (mm)	L*81d*43h mm
Cutout (mm)	(L-19.5)*72d mm
Capacity Of Modules	7 modules
Color	White / Black

Outline Drawing:

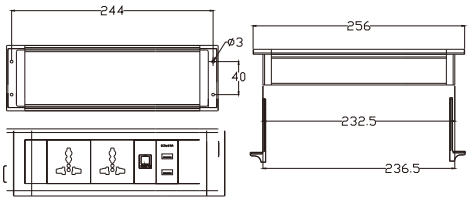

FZ-507S

Panel Material	Aluminum alloy/steel
Panel Dimension (mm)	223*62*45
Cutout (mm)	229*58
Capacity Of Modules	Max.8 ways 45*45mm modules
Color	Silver/ Black/Gray

Outline Drawing:

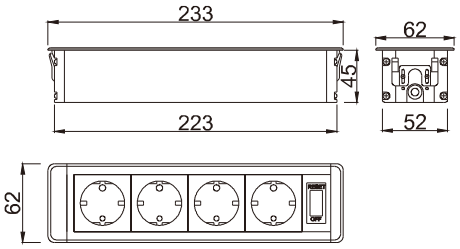

FZ-507B

Panel Material	Aluminum alloy/steel
Panel Dimension (mm)	223*62*45
Cutout (mm)	229*58
Capacity Of Modules	Max.8 ways 45*45mm modules
Color	Black

Outline Drawing:

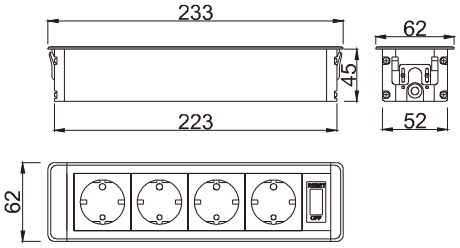

FZ-536

Panel Material	Aluminum alloy
Panel Dimension (mm)	200*86*76
Cutout (mm)	180*60*50
Capacity Of Modules	6 ways 45*45mm modules

Outline Drawing:

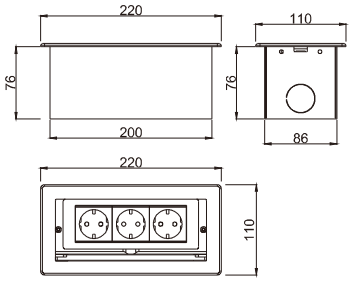

FZ-PFB01

Panel Material	PC
Panel Dimension (mm)	95*94
Cutout (mm)	80*80
Capacity Of Modules	Slide coverplate with outlet&USB
Color	Black

Outline Drawing:

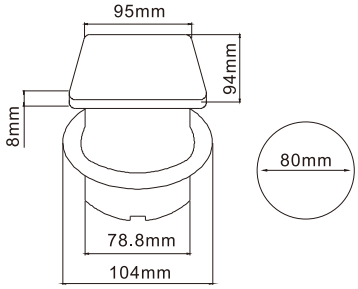

FZ-PFB02

Panel Material	PC
Panel Dimension (mm)	95*94
Cutout (mm)	80*80
Capacity Of Modules	Slide coverplate with 45*45mm socket & USB
Color	Black

Outline Drawing:

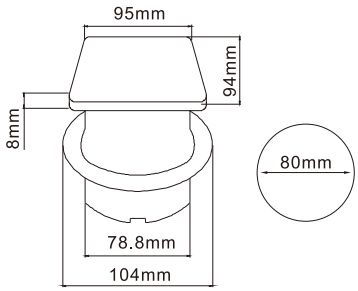

FZ-501B

Panel Material	Zinc alloy
Panel Dimension (mm)	Ø110
Cutout (mm)	Ø102
Capacity Of Modules	3 ways (45*45mm)modules
Color	Black

Outline Drawing:

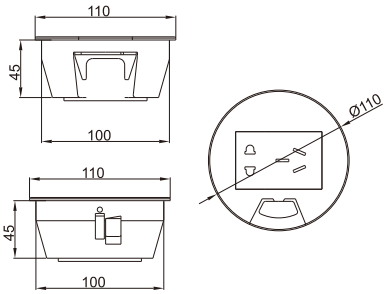

FZ-501S

Panel Material	Zinc alloy
Panel Dimension (mm)	Ø110
Cutout (mm)	Ø102
Capacity Of Modules	3 ways (45*45mm)modules
Color	Silver

Outline Drawing:

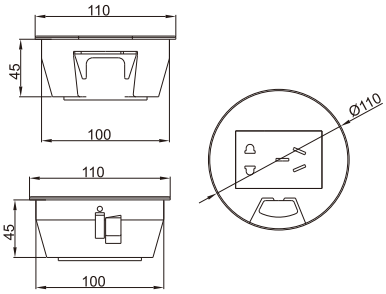

FZ-502W

Panel Material	Fire-retardant PC plastic
Panel Dimension (mm)	Ø120
Cutout (mm)	Ø108
Capacity Of Modules	45*45mm modules
Color	White

Outline Drawing:

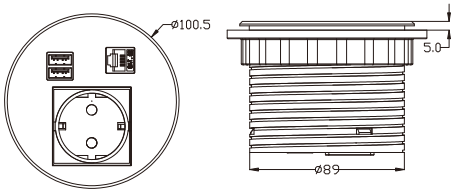

FZ-502B

Panel Material	Fire-retardant PC plastic
Panel Dimension (mm)	Ø120
Cutout (mm)	Ø108
Capacity Of Modules	45*45mm modules
Color	Black

Outline Drawing:

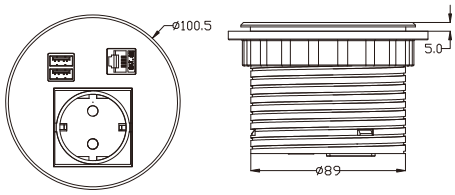

SFGS811-UK

Panel Material	PC
Panel Dimension (mm)	Ø90
Cutout (mm)	Ø85
Capacity Of Modules	typeA,typeC
Color	white,etc

Outline Drawing:

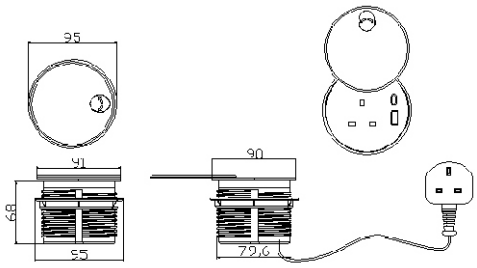

SFGS811-WL

Panel Material	PC
Panel Dimension (mm)	Ø90
Cutout (mm)	Ø85
Capacity Of Modules	typeA,typeC,Wireless charging
Color	white,etc

Outline Drawing:



SFGS811-US

Panel Material	PC
Panel Dimension (mm)	Ø90
Cutout (mm)	Ø85
Capacity Of Modules	typeA,typeC,US Socket
Color	white,etc

Outline Drawing:

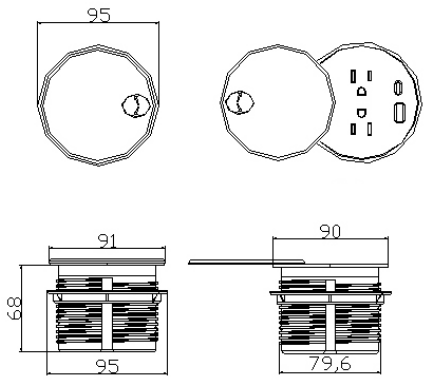

FZ-561E

Panel Material	Aluminum alloy+PC
Panel Dimension (mm)	324*109*104
Cutout (mm)	298*104
Capacity Of Modules	9 ways 45*45mm Legrand's Mosaic modules
Color	Silver / Black

Outline Drawing:

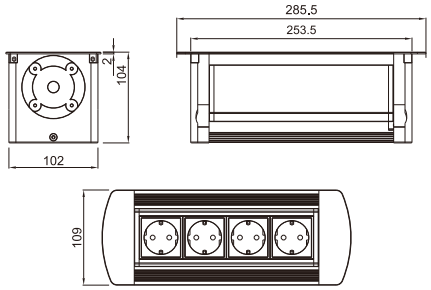

FZ-561

Panel Material	Aluminum alloy+PC
Panel Dimension (mm)	285.5*109*104
Cutout (mm)	258*105
Capacity Of Modules	8 ways 45*45mm modules
Color	Silver / Black

Outline Drawing:

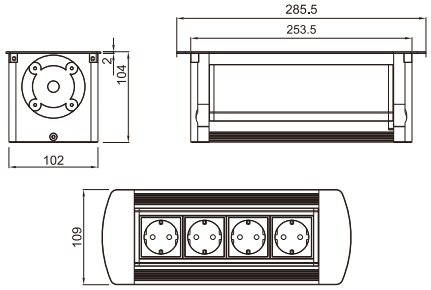

FZ-521S

Panel Material	Aluminum alloy
Panel Dimension (mm)	265*130
Cutout (mm)	254*116
Capacity Of Modules	9 ways 45*45mm modules
Color	Silver

Outline Drawing:

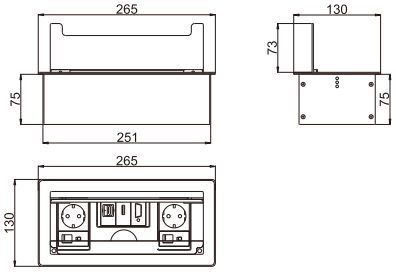

FZ-521B

Panel Material	Aluminum alloy
Panel Dimension (mm)	265*130
Cutout (mm)	254*116
Capacity Of Modules	9 ways 45*45mm modules
Color	Black

Outline Drawing:

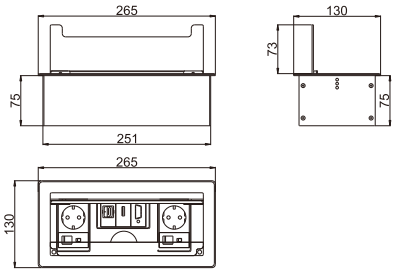

FZ-522

Panel Material	Fire-retardant PC plastic
Panel Dimension (mm)	245*130
Cutout (mm)	223*110
Capacity Of Modules	9 ways 45*45mm modules
Color	Silver / Black

Outline Drawing:



FZ-521C

Panel Material	Fire-retardant PC plastic
Panel Dimension (mm)	265*130
Cutout (mm)	254*116
Capacity Of Modules	9 ways 45*45mm modules
Color	Silver / Black

Outline Drawing:

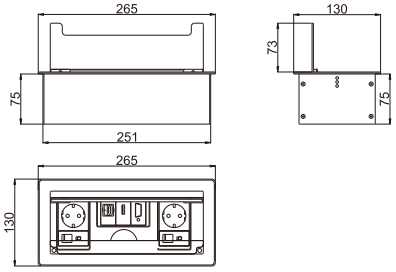

FZ-525

Panel Material	Aluminum alloy
Panel Dimension (mm)	340*150
Cutout (mm)	312*132
Capacity Of Modules	8 ways 45*45mm modules
Color	Silver / Black

Outline Drawing:

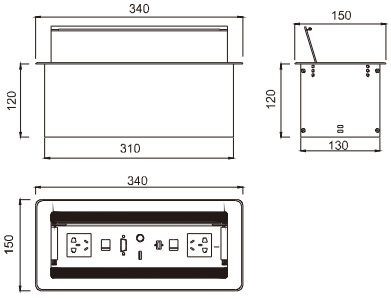

FZ-528

Panel Material	Aluminum alloy
Panel Dimension (mm)	265*130
Cutout (mm)	254*116
Capacity Of Modules	8 ways 45*45mm modules
Color	Silver / Black

Outline Drawing:



FZ-L001A/B

Panel Material	Aluminum alloy(silver) , zinc alloy(black)
Panel Dimension (mm)	300*145*97
Cutout (mm)	380*135
Capacity Of Modules	4*86type modules
Color	Silver / Black

Outline Drawing:

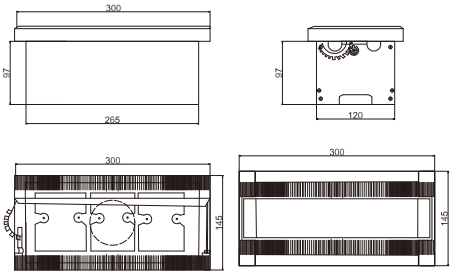

FZ-L002A/B



Panel Material	Aluminum alloy
Panel Dimension (mm)	340*130
Cutout (mm)	328*116
Capacity Of Modules	Power outlet+Data outlet or USB charging : Customized as required
Color	Silver / Black

Outline Drawing:

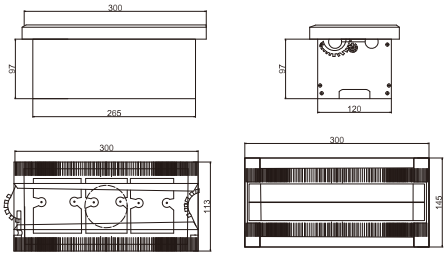





Distribution Box

- **Waterproof Distribution Box**
- **Portable Socket Distribution**
- **Electric Distribution box**

01 More Categories

it can meet the use of mobile distribution box, waterproof distribution box and audio distribution box in industrial, outdoor, stage performance and other places.

02 More Current

16a, 32a, 63A, 125A to 250A

03 Customization

including shell, socket, plug, MCB circuit breaker ...

1.Cable Management

1.3 Distribution Box
1.3.1 Waterproof Distribution Box

SF-1504

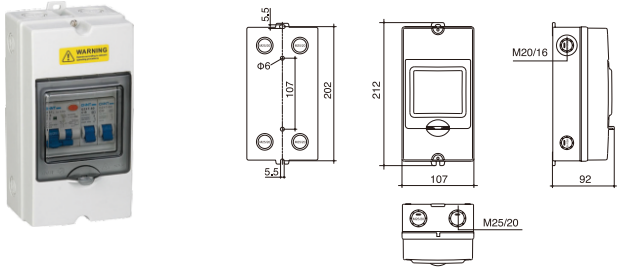

Size:212*107*92

SF-1506

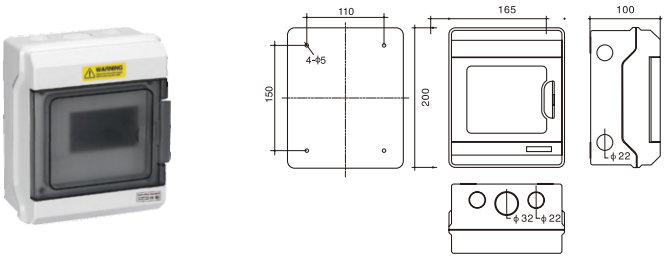

Size:200*165*100

SF-1509

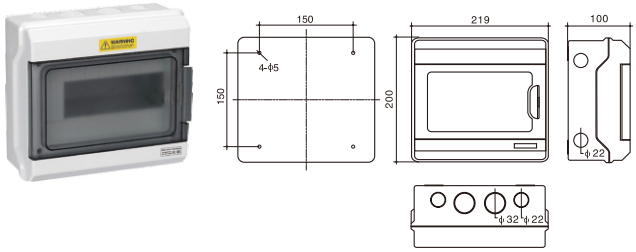

Size:200*219*100

SF-1512

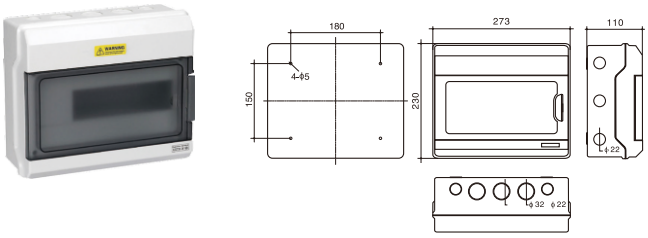

Size:230*273*110

SF-1518

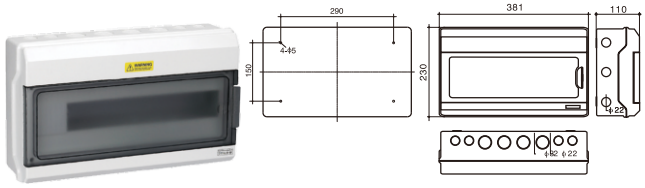

Size:381*230*110

SF-1524

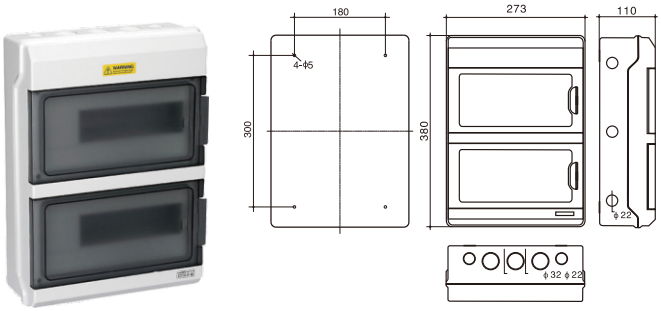

Size:380*273*110

SF-1536

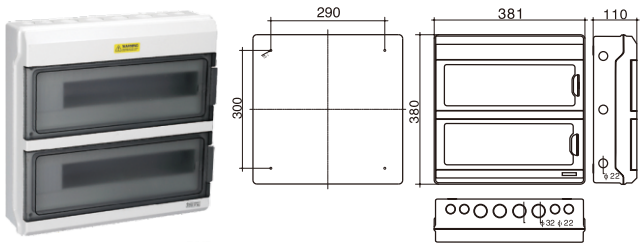

Size:381*380*110

SF-0012

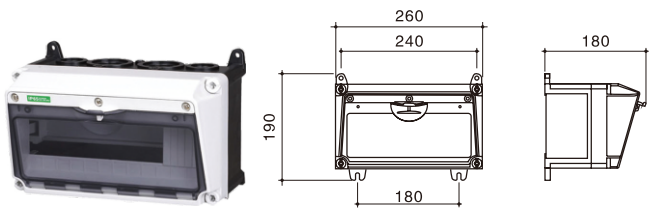

Size:260*190*180

SF-0024



Size:260*340*180

SF-0036



Size:260*490*180

SF-0048



Size:260*640*180

1.Cable Management 1.3 Distribution Box 1.3.2 CEE Distribution Box

SF-NP282815-1

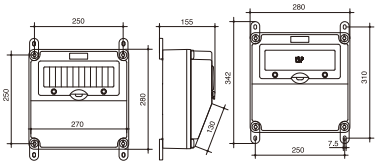

Size:280*270*155

SF-NP282815-2

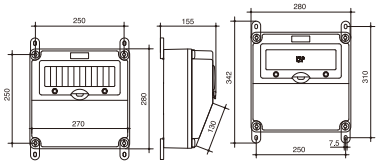

Size:280*270*155

SF-NP335317

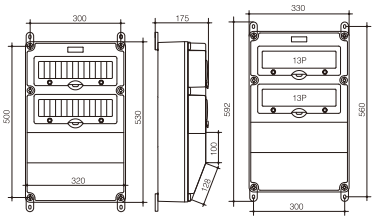

Size:530*320*175

SF-NP334317-1

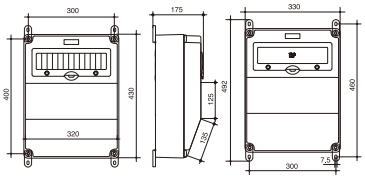

Size:430*320*175

SF-NP334317-2

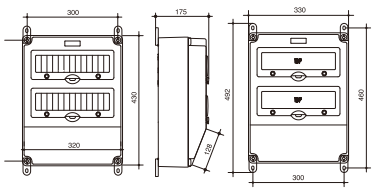

Size:800*600*220

1.Cable Management

1.3 Distribution Box
1.3.3 Portable Socket Distribution

SF-1805



Size:490*140*95

SF-1805C

Size:430*120*70

SF-1801



Size:240*120*120

SF-1803

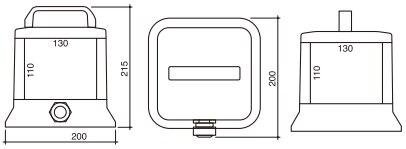

Size:240*120*120

SF-1804



Size:260*245*260

SF-1806B



Size:308*277*238

SF-NP1807-A

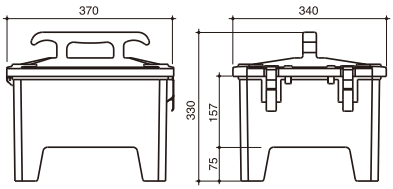

Size:370*340*330

SF-NP1807-D

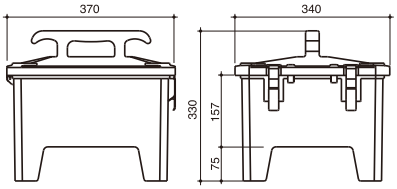

Size:370*340*330

SF-NP1806-A

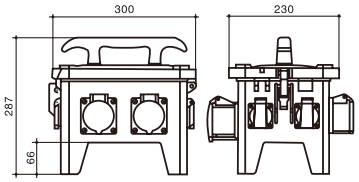

Size:330*230*287

SF-NP1806-E

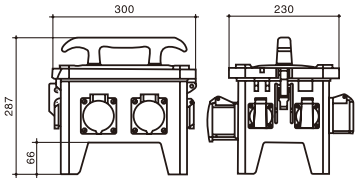

Size:330*230*287

SF-1808

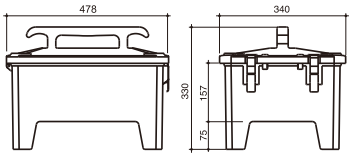

Size:478*340*330

SF-NP1901

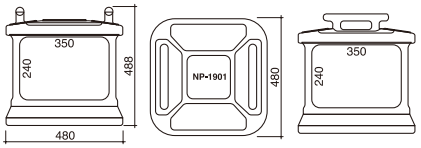

Size:480*480*480

SF-NP1902

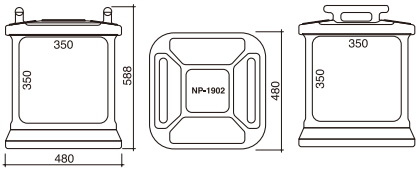

Size:588*480*480

SF-NP1903



Size:460*430*380

SF-NP1904

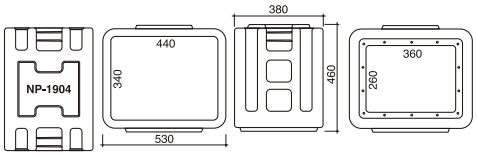

Size:530*460*380

SF-NP1905

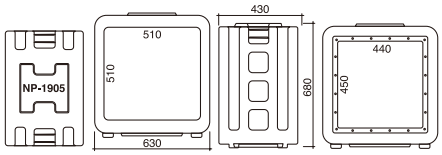

Size:680*630*430

SF-NP1906

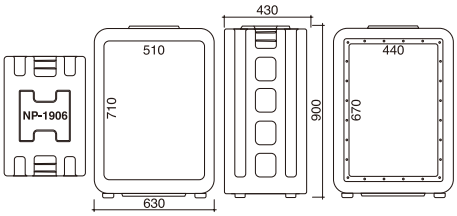

Size:900*630*430

2.7 CEE Plug,Socket & Coupler

2.7.1 Panel Mounted CEE Socket

3pole

4pole

5pole

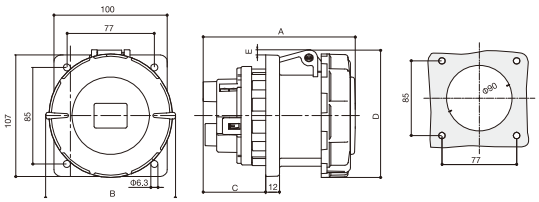

Ampere		3pole	4pole	5pole
16A	IP44	SF1331	SF1431	SF1531
	IP67	SF1332	SF1432	SF1532
32A	IP44	SF3331	SF3431	SF3531
	IP67	SF3332	SF3432	SF3532
63A	IP44	SF6331	SF6431	SF6531
	IP67	SF6332	SF6432	SF6532
125A	IP67	SF 5332	SF5432	SF5532

2.7.2 Panel side-mounted CEE Socket

3pole

4pole

5pole

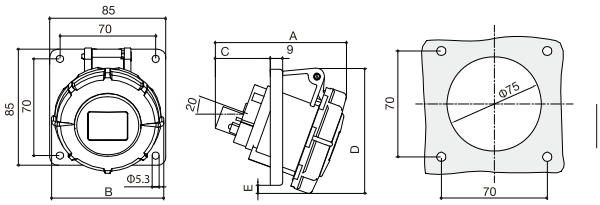

Ampere		3pole	4pole	5pole
16A	IP44	SF1341	SF1441	SF1541
	IP67	SF1342	SF1442	SF1542
32A	IP44	SF3341	SF3441	SF3541
	IP67	SF3342	SF3442	SF3542
63A	IP44	SF6341	SF6441	SF6541
	IP67	SF6342	SF6442	SF6542
125A	IP67	SF5342	SF5442	SF5542

2.7.3 Wall mounted CEE Socket

3pole

4pole

5pole

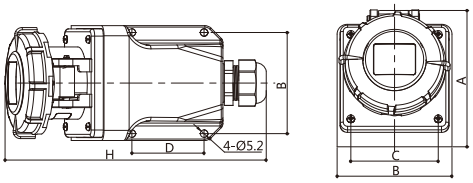

Ampere		3pole	4pole	5pole
16A	IP44	SF1311	SF1411	SF1511
	IP67	SF1312	SF1412	SF1512
32A	IP44	SF3311	SF3411	SF3511
	IP67	SF3312	SF3412	SF3512
63A	IP44	SF6311	SF6411	SF6511
	IP67	SF6312	SF6412	SF6512
125A	IP67	SF5312	SF5412	SF5512

2.7.4 CEE Interlock Switch Socket

3pole

4pole

5pole

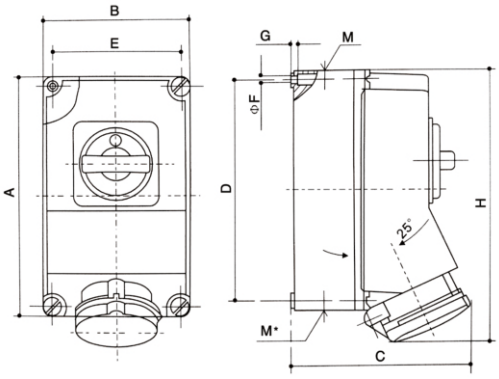

Ampere		3pole	4pole	5pole
16A	IP67	SF1372	SF1472	SF1572
32A	IP67	SF3372	SF3472	SF3572
63A	IP67	SF6372	SF6472	SF6572

2.7.5 CEE Coupler

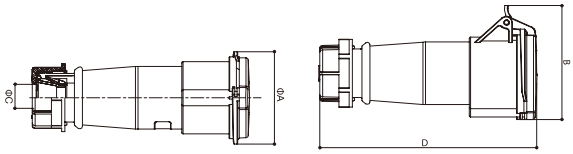

3pole 4pole 5pole

Ampere		3pole	4pole	5pole
16A	IP44	SF1321	SF1421	SF1521
	IP67	SF1322	SF1422	SF1522
32A	IP44	SF3321	SF3421	SF3521
	IP67	SF3322	SF3422	SF3522
63A	IP44	SF6321	SF6421	SF6521
	IP67	SF6322	SF6422	SF6522
125A	IP67	SF5322	SF5422	SF5522

2.7.6 CEE plug

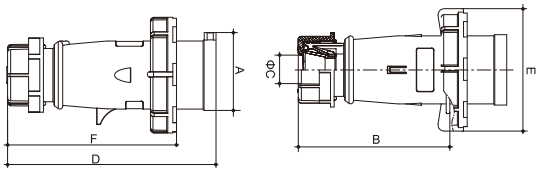

3pole 4pole 5pole

Ampere		3pole	4pole	5pole
16A	IP44	SF1301	SF1401	SF1501
	IP67	SF1302	SF1402	SF1502
32A	IP44	SF3301	SF3401	SF3501
	IP67	SF3302	SF3402	SF3502
63A	IP44	SF6301	SF6401	SF6501
	IP67	SF6302	SF6402	SF6502
125A	IP67	SF5302	SF5402	SF5502

2.7.7 CEE Concealed plug

3pole

4pole

5pole

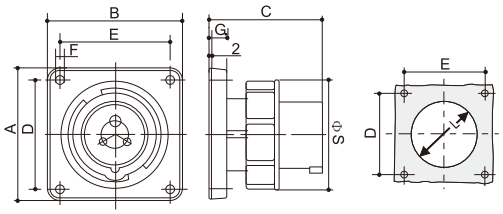

Ampere		3pole	4pole	5pole
16A	IP44	SF1351	SF1451	SF1551
	IP67	SF1352	SF1452	SF1552
32A	IP44	SF3351	SF3451	SF3551
	IP67	SF3352	SF3452	SF3552
63A	IP44	SF6351	SF6451	SF6551
	IP67	SF6352	SF6452	SF6552
125A	IP67	SF5352	SF5452	SF5552

2.7.8 CEE Wall mounted plug

3pole

4pole

5pole

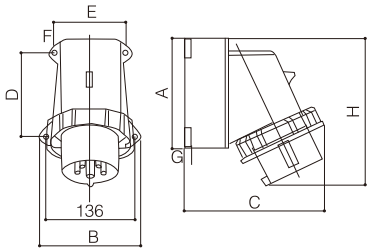

Ampere		3pole	4pole	5pole
16A	IP44	SF1361	SF1461	SF1561
	IP67	SF1362	SF1462	SF1562
32A	IP44	SF3361	SF3461	SF3561
	IP67	SF3362	SF3462	SF3562
63A	IP44	SF6361	SF6461	SF6561
	IP67	SF6362	SF6462	SF6562

2.7.9 IP67 Large current plugs

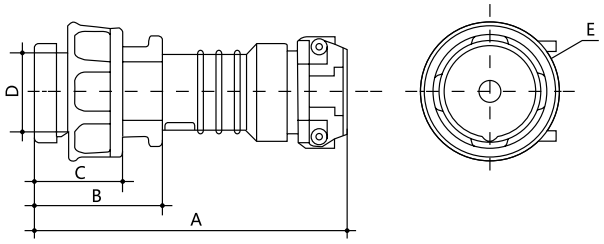

		110V 50a. 60Hz	230V 50a. 60Hz	400V 50a. 60Hz	500V 50a. 60Hz	⩾50-500V 50a. 60Hz	⩾50-500V 50a. 60Hz
Ampere	Pole	3P 4P 5P 4h 4h 4h	3P 4P 5P 6h 9h 9h	3P 4P 5P 9h 6h 6h	3P 4P 5P 7h 7h 7h	3P 4P 5P 10h 10h 10h	3P 4P 5P 2h 2h 2h
250A	4	NP2402-4	NP2402-9	NP2402	NP2402-7	NP2402-10	NP2402-2
	5	NP2502-4	NP2502-9	NP2502	NP2502-7	NP2502-10	NP2502-2

Ampere	Pole	A	B	C	D	E	F
250A	4	292	118	82	75	130	
	5	292	118	82	75	130	

Conductor cross-sectional area (mm2) from the smallest to the largest 70-90

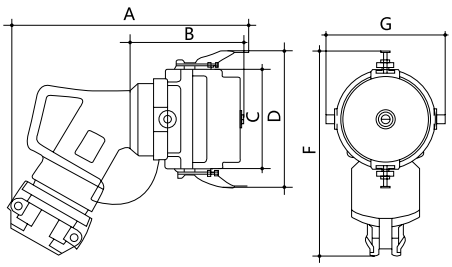

		110V 50a. 60Hz	230V 50a. 60Hz	400V 50a. 60Hz	500V 50a. 60Hz	⩾50-500V 50a. 60Hz	⩾50-500V 50a. 60Hz
Ampere	Pole	3P 4P 5P 4h 4h 4h	3P 4P 5P 6h 9h 9h	3P 4P 5P 9h 6h 6h	3P 4P 5P 7h 7h 7h	3P 4P 5P 10h 10h 10h	3P 4P 5P 2h 2h 2h
420A	4	NP4402-4	NP4402-9	Np4402	NP4402-7	NP4402-10	NP4402-2
	5	NP4502-4	NP4502-9	NP4502	NP4502-7	NP4502-10	NP4502-2

Ampere	Pole	A	B	C	D	E	F	G	H
420A	4	384	185	160	222	120	331	193	
	5	384	185	160	222	120	331	193	

Conductor cross- sectional area (mm^2) from the smallest to the largest 120-150

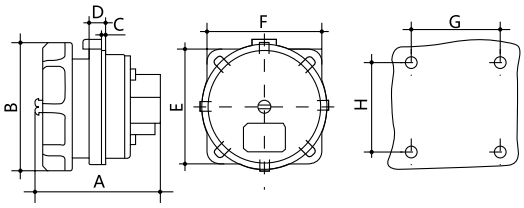

		110V 50a. 60Hz	230V 50a. 60Hz	400V 50a. 60Hz	500V 50a. 60Hz	⩾50-500V 100-300Hz	⩾50-500V a.301-500Hz
Ampere	Pole	3P 4P 5P 4h 4h 4h	3P 4P 5P 6h 9h 9h	3P 4P 5P 9h 6h 6h	3P 4P 5P 7h 7h 7h	3P 4P 5P 10h 10h 10h	3P 4P 5P 2h 2h 2h
250A	4	NP2432-4	NP2432-9	NP2432	NP2432-7	NP2432-10	NP2432-2
	5	NP2532-4	NP2532-9	NP2532	NP2532-7	NP2532-10	NP2532-2

Ampere	Pole	A	B	C	D	E	F	G	H
250A	4	127	130	3	13	116	116	91	91
	5	127	130	3	13	116	116	91	91

Conductor cross-sectional area (mm^2) from the smallest to the largest 70-90

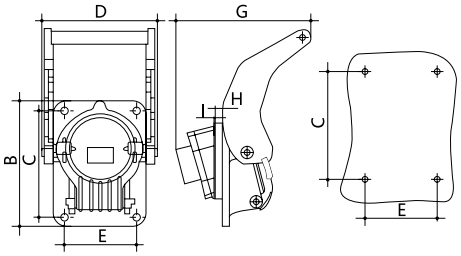

		110V 50a. 60Hz	230V 50a. 60Hz	400V 50a. 60Hz	500V 50a. 60Hz	⩾50-500V 100-300Hz	⩾50-500V a.301-500Hz
Ampere	Pole	3P 4P 5P 4h 4h 4h	3P 4P 5P 6h 9h 9h	3P 4P 5P 9h 6h 6h	3P 4P 5P 7h 7h 7h	3P 4P 5P 10h 10h 10h	3P 4P 5P 2h 2h 2h
420A	4	NP4432-4	NP4532-9	Np4432	NP4432-7	NP2432-10	NP2432-2
	5	NP4532-4	NP4532-9	NP4532	NP4532-7	NP2532-10	NP2532-2

Ampere	Pole	A	B	C	D	E	F	G	H
420A	4	384	185	160	222	120	331	193	
	5	384	185	160	222	120	331	193	

Conductor cross- sectional area (mm^2) from the smallest to the largest120-150

SF75201

Current:160A~400A

Outline dimension

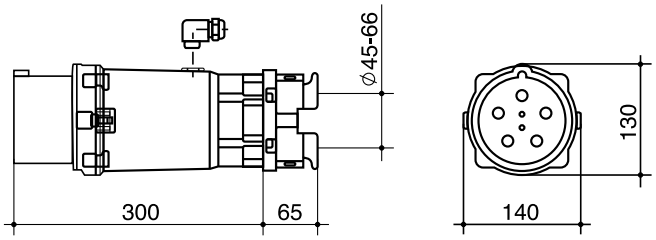

SOCKET

SF75241

Current:160A~400A

Outline dimension

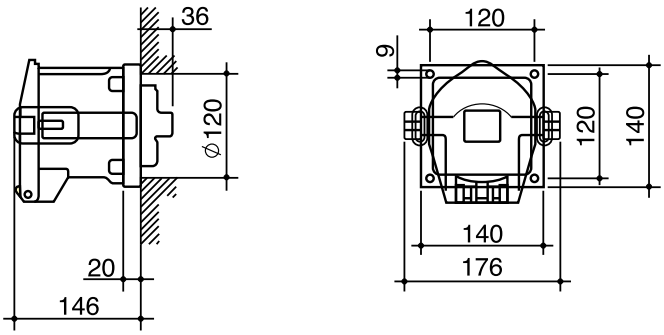

COUPLER

SF75211

Current:160A~400A

Outline dimension

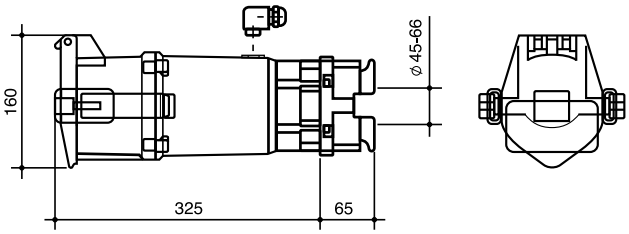

2.7.9 CEE low voltage socket and plug

CEE 20~40v 16A plug

SFD1201

SFD1301

CEE 20~40v 32A plug

SFD3201

SFD3301

CEE 40~50V 16A plug

SFD1202

SFD1302

CEE 40~ 50V 32A plug

SFD3202

SFD3302

CEE 20~25V 16A socket

SFD1231

SFD1331

CEE 20~25V 32A

SFD3231

SFD3331

CEE 40~50V 16A socket

SFD1232

SFD1332

CEE 40~50V 32A socket

SFD3232

SFD3332

CEE IP44 230V 16A plug

SFS1201

CEE IP44 230V 16A socket

SFS1232

SAFEWIRE , Safe Wiring System

Waterproof Switch Socket

01 IP Protection

IP55 ~ 66

IP

Waterproof Dustproof

02 More Switch soscket

03 International

Similar Legrand Mosaic / Arteor series

45

86/146 type module socket

86



1.Cable Management

1.4 Waterproof Switch Socket
1.4.1 IP66 Waterproof Box for 45*45mm modules

1)A Verison

SF66-SR

Size	100*100*73
Specifications	one Eu socket

SF66-SRS

Size	100*200*73
Specifications	one Eu socket with switch

SF66-SRS

Size	200*100*73
Specifications	2 Eu socket

SF66-2SR

Size	300*100*73
Specifications	2 Eu socket with switch

SF66-SRS

Size	400*100*73
Specifications	3 Eu socket with switch

2)B Verison

SA66-S

Size	110*100*100
Specifications	one BS 13A socket

SA66-2S

Size	110*100*200
Specifications	2* BS 13A socket

SA66-SS

Size	110*100*200
Specifications	BS 13A socket with switch

SA66-S2S

Size	110*100*300
Specifications	2*BS 13A socket with switch

SA66-S3S

Size	110*100*400
Specifications	3*BS 13A socket with switch

More modules can be choose to install.

F3A

F4

F5

F6

F10

F11

F15

F16

F18

F19

F19B

1.Cable Management

1.4 Waterproof Switch Socket
1.4.2 IP55 Waterproof Box

SF-QB-200

Size	70*85*63
Specifications	modules switch control IP55 waterproof box

SF-QB-201

Size	94*85*63
Specifications	modules one switch and one socket outlet IP55

SF-QB-202

Size	118*85*63
Specifications	modules of 2 socket outlet IP55 waterproof box,

SF-QB-41

Size	85*94
Specifications	flush-mounting IP55 waterproof box

SF-QB-42

Size	118*58
Specifications	flush-mounting IP55 waterproof box

913SPF

Size	1 Gang 13A
Specifications	waterproof switch socket

923SPF

Size	2 Gang 13A
Specifications	waterproof switch socket

901ALF

Size	1 Gang switch
Specifications	waterproof box

902ALF

Size	2 gang switch
Specifications	Waterproof box

WP14

Size	20A*250V
Specifications	BS EN 60669-1 single pole

Accessories

01 More Categories



Modules



Panels



Frames



Bottom boxes

02 Customization

Material

Size

Parts

Colour

Configuration

Packing

Different solutions can be customized for smart home, network wiring and electrician customers;

03 International

Similar Legrand Mosaic / Arteor series

45

Similar Panasonic 128 type series

128

86/146 type module socket

86



5V 4.2A USB charger、HDMI、Cat6 , RCA , and so on



45×45mm Module as Specification Legrand's Mosaic/Arteor Series

"Snap-in" design:

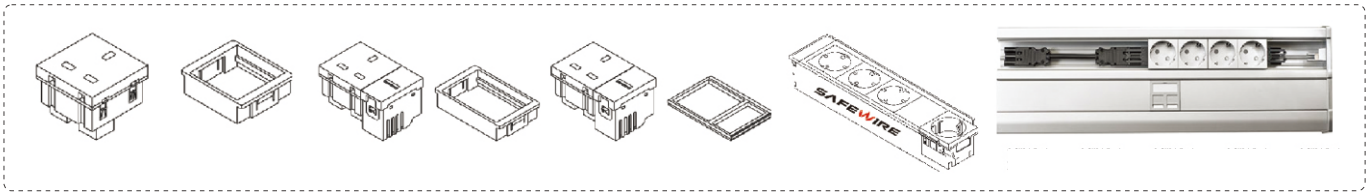

More optional color:

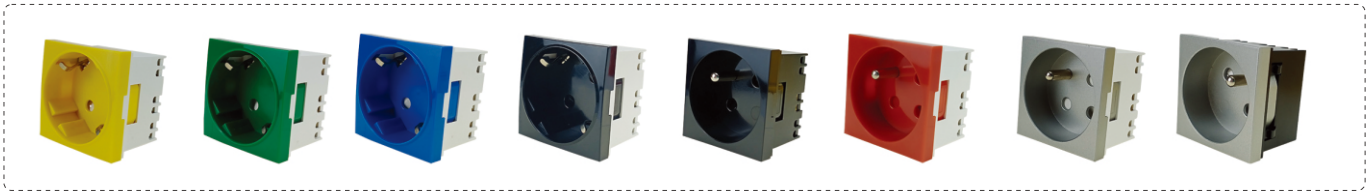

Easy-Wiring:

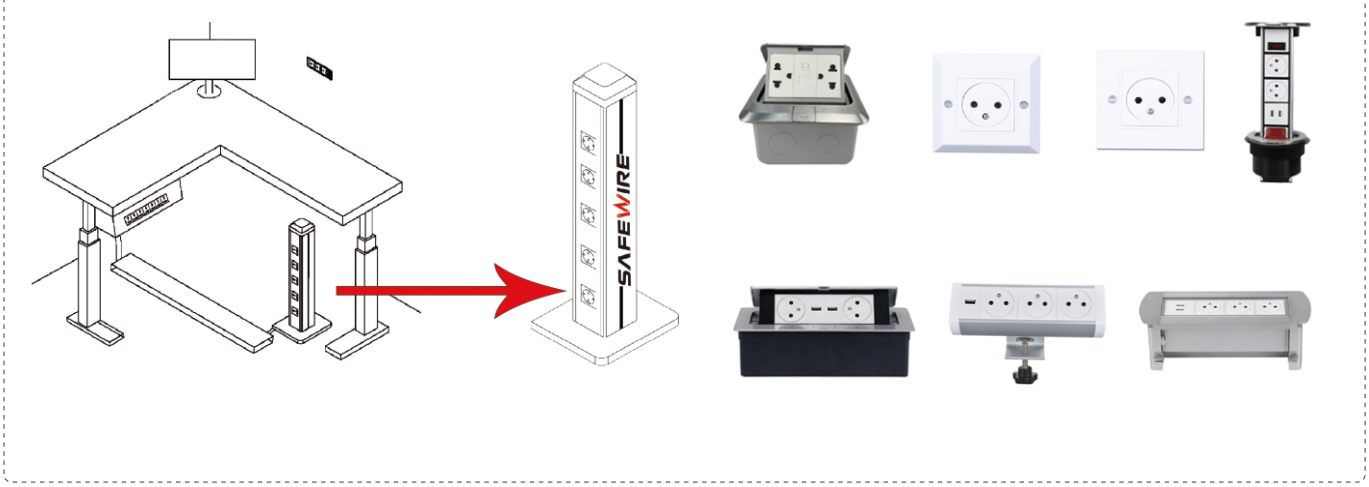

45*45mm NEMA socket for ASEAN

45*45 & 45 *22.5mm NEMA socket

F18 (45*45mm)

F1(45*22.5mm)



HTD- 14 with optional 45*45mm modules & 128 pansonics modules

HTD-13

HTD-13

HTD-13

HTD-13(128 type socket)

Pop up socket

FD-201L

HTD-2602L

HTD-2602B

Pull Out Box with hinge

HTD- 120K

HTD-146K


HTD-145CKP

HTD-130LK

45*45mm pop up French socket

French socket

F16C

1)IP42 Ingress Prtection

2)Pop up with shutter

3)45x45mm snap-in easy installation

Application in wall-mounting switch

F-6117080F

F-6117079F



Application in floor box

FD-201L

HTD-102P

HTD-120K

Application in desk socket

FZ-517S

FZ-TB-W

FZ-561

FZ-526-6

2.Accessories

2.1 Modules & socket & connector
2.1.1 45*45mm Power Socket Match Legrand's 'Mosaic/Arteor Support

Product Picture	Size	Description	Color
F1	22.5x45mm	Europeab-American socket, Brazil NEMA5-15R & CEE 7-16 Outlet 16A-250V & 15A-127V, 2P+E	white/ black
F2B	45×22.5MM	US 16A multi-function socket	white/ black
F3A	45x45mm	3 pin 16A,220V;Australia & New Zealand AS/NZS 3112Outlet 15Amp 250V	white/ black
F3C	45x45mm	3 pin 15A,220V;Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V,with SAA certificate	white/ black
F4	45x45mm	International Multi-confliguration Outlet 13A~250V & 15A-127V of 90 degree angle, 10A, 250V;2P+E	white/ black
F6	45x22.5mm	Italy & Chile CEI16/VII Outlet 10Amp 250V;2P+E	white/ black
F11	45x45mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V ,90 degree;2P+E	white/ black
F15	45x45mm	European socket(Schuko), 16A, 250V , Angle 0 degree or 90 degree, 2P+E with shutter socket,screw terminals;2P+E	white/ black
F16	45x45mm	French Socket,16A,250V;2P+E;	white/ black
F16C	45x45mm	Ip44 French Socket,16A,250V, screwleless terminals;2P+E; With pop up mechanism protector shutter, 4 side snap-in clip into support.	white/ black

Product Picture	Size	Description	Color
F2	22.5x45mm	2 pin socket, 10A, 250V; 2P	white/ black
F2C	45×22.5MM	US 15A socket	white/ black
F3B	45x45mm	3 pin 10A,220V;Australia & New Zealand AS/NZS 3112 Outlet 10Amp 250V	white/ black
F3D	45x45mm	3 pin 10A,220V;Australia & New Zealand AS/NZS 3112 Outlet 15Amp 250V,with SAA certificate	white/ black
F5	45x22.5mm	Switzerland SEV 1011 Type 13 Outlet, 10A, 250V;2P+E	white/ black
F10	45x45mm	Israel socket, 16A, 250V	white
F11B	45x45mm	United Kingdom BS1363A shuttered Outlet 13Amp 250V , 45 degree;2P+E	white/ black
F15B	45x45mm	European socket(Schuko), 16A, 250V , Angle 45 degree , 2P+E with shutter socket,screw terminals;	white/ black
F16B	45x45mm	French Socket,16A,250V,Angle 45 degree , screwleless terminals;2P+E	white/ black
F18	45x45mm	Brazil NEMA5-15R & CEE 7-16 Outlet 16A-250V & 15A-127V	white/ black

2.Accessories

2.1 Modules & socket & connector
2.1.1 45*45mm Power Socket Match Legrand's ' Mosaic/Arteor Support

Product Picture	Size	Description	Color
F18B	45×45MM	US 16A multi-function socket	white/ black
F19B	45x22.5mm	S.Africa/Brazil NBR 14136-2002 Outlet 10Amp 250V	white/ black
F8	22.5x45mm	USB charging,single port output 5VDC 2.1A, maximum charging current 1*2100mA ,screw terminal.	white/ black
F8D	22.5x45mm	USB charging,dual port output 5VDC 2.1A shared,maximum charging current 1*2100mA , screw terminal，Support YD/T1591-2009, BC1.2 , Apple and Samsung phone and IPAD.	white/ black
F1031	45x45mm	USB charging,triple port output 5VDC 3.1A, maximum charging current 1*3100mA ,type A+ type C USB charger;screw terminal.	white/ black
F1042A/C	45x45mm	Dual port USB charger of 4.2A 5VDC;with Short time short-circuit protection& identifying chip; type A/C;	white/ black
F1021A-A/C	45x45mm	Dual port USB charger of 2.1A 5VDC, with type A/C;with Short time short-circuit protection& identifying chip; with LED indicator.	white/ black
F1045	45x45mm	45W USB type C function key; Dimension: 45mm*45mm	white/ black
F21	22.5x45mm	Cat 5e RJ45 socket with shutter;	white/ black
F23	22.5x45mm	Rj11 Telephone socket with shutter, regular with 4 contact pins. 2 contact pins and 6 contact pins should be customization production.;	white/ black

Product Picture	Size	Description	Color
F19	45x45mm	S.Africa/Brazil NBR 14136-2002 Outlet 20Amp 250V(Also support S. Africa , India and UK BS546 5 Amp 250V male plug)	white/ black
F20	45×45MM	US 15A socket	white/ black
F8C	22.5x45mm	USB Charger 1A	white/ black
F9	45x45mm	USB charging,dual port output 5VDC 2.1A, maximum charging current 1*2100mA ,screw terminal.	white/ black
F1042A/A	45x45mm	Dual port USB charger of 4.2A 5VDC;with Short time short-circuit protection& identifying chip; type A/A; Materials be RoHS directive	white/ black
F1021A-A/A	45x45mm	Dual port USB charger of2.1A 5VDC, with type A/A;with Short time short-circuit protection& identifying chip; with LED indicator.	white/ black
F1021AB-A/C	45x45mm	Dual port USB charger of2.1A 5VDC, with type A/C;with Short time short-circuit protection& identifying chip; with LED indicator and protector shutter;	white/ black
F1036	45x45mm	36W USB-1A1C function key; Dimension: 45mm*45mm	white/ black
F21B	22.5x45mm	Cat 6 RJ45 socket with shutter;	white/ black
F23B	22.5x45mm	2 gang RJ45 CAT6 +RJ11 Telephone socket without shutter	white/ black

Product Picture	Size	Description	Color
F23C	22.5x45mm	2 gang RJ45 CAT6 without shutter	white/ black
F22B	22.5×45MM	RJ45 UTP Cat6 toolless with shutter	white/ black
F22B-2	45×45MM	RJ45 UTP Cat6 toolless with shutter	white/ black
F22B-3	45×45MM	RJ45 UTP Cat6 toolless 2 port with shutter	white/ black
F50B-F	22.5x45mm	Single Female TV socket;	white/ black
F51	22.5x45mm	BNC socket	white/ black
F52A	22.5x45mm	Φ3.5 earphone for aduio/ video connector, screw terminals	white/ black
F52C	22.5x45mm	Φ3.5 earphone for aduio/ video connector, straight blade;	white/ black
F53	22.5x45mm	DIN(eight pins)	white/ black
F56	22.5x45mm	Vedio socket provide the video connect for device such as DVD drive, camera etc.;	white/ black

Product Picture	Size	Description	Color
F22	22.5×45MM	RJ45 UTP Cat5E toolless with shutter	white/ black
F22-2	45×45MM	RJ45 UTP Cat5E toolless with shutter	white/ black
F22-3	45×45MM	RJ45 UTP Cat5E toolless 2 port with shutter	white/ black
F50	22.5x45mm	Single male TV socket;	white/ black
F50B-M	22.5x45mm	Single male TV socket;	white/ black
F52	22.5x45mm	Φ3.5 earphone for aduio/video connector, screw terminals	white/ black
F52B	22.5x45mm	Φ3.5 earphone for aduio/video connector, Soldless	white/ black
F52D	22.5x45mm	Φ3.5 earphone for aduio/video connector, with cable	white/ black
F55	22.5x45mm	Audio socket provide the stereo audio connect for device such as DVD drive, camera etc.;	white/ black
F57	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio	white/ black

Product Picture	Size	Description	Color
F57-A	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; Solder type;	white/ black
F57-C	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; straight blade type;	white/ black
F59	22.5x45mm	USB for data 2.0,USB to USB, VBus,D,D+, Ground, shielded	white/ black
F60-B	22.5x45mm	Male Kalon socket for XLR plug, Screwing connection,	white/ black
F62A	22.5x45mm	Speaker socket,soldering connection;	white/ black
F63	22.5x45mm	Audio wiring socket; Dimension: 22.5 mm*45 mm	Black / White
F65B	22.5x45mm	15 Pins VGA (male type),RS232 socket,Screwing connection	white/ black
F66B	22.5x45mm	15 Pins VGA (female type);RS232 socket,soldering connection	white/ black
F67B	22.5x45mm	9 Pins VGA (male type),RS232 socket,Screwing connection	white/ black
F68A	22.5x45mm	9 Pins VGA (female type);RS232 socket,screwing connection	white/ black

Product Picture	Size	Description	Color
F57-B	22.5x45mm	RCA composite video & stereo audio, 1G-Y/GND and 1-Yellow for Composite video, 2G-W/GND and 2-White for Left Audio, 3G-R/GND and 3-Red for Right Audio; soldless/screw type;	white/ black
F58	22.5x45mm	Sound socket provide the stereo audio connect for device such as DVD drive, camera etc.;	white/ black
F60-A	22.5x45mm	Male Kalon socket for XLR plug, soldering connection,	white/ black
F61	22.5x45mm	Composite video, Left Audio and Right Audio,RJ45 to RCA.	white/ black
F62B	22.5x45mm	Speaker socket, Screwing connection;	white/ black
F65A	22.5x45mm	15 Pins VGA (male type),RS232 socket,soldering connection	white/ black
F66A	22.5x45mm	15 Pins VGA (female type);RS232 socket,soldering connection	white/ black
F67A	22.5x45mm	9 Pins VGA (male type),RS232 socket,soldering connection	white/ black
F68A	22.5x45mm	9 Pins VGA (female type);RS232 socket,soldering connection	white/ black
F69A	22.5x45mm	HDMI,180 degree ,2.0 Standard female/female HDMI socket with protective shutter	white/ black

Product Picture	Size	Description	Color
F69B	22.5x45mm	HDMI,90 degree ,Male HDMI socket, need additional frame size: 45*45mm when installed in SNAP-in frame	white/ black
F70	22.5x45mm	Empty plate;material: Polycarbonate; color:white	white/ black
F80	45x22.5mm	1 way switch, 10A, 250V	white/ black
F82	45x45mm	1 way switch, 10A, 250V	white/ black
F84	45x45mm	2 gang/Double Pole Switch 16 Amp 250V,nylon 66, PC coverplate	white/ black
F100A	45x45mm	2 gang 45*45mm modules optional 2 *RJ45 with for patch panel/floor box	white/ black
F100C	45x45mm	2 gang 45*45mm modules optional 2*RJ11 with for patch panel/floor box	white/ black

Product Picture	Size	Description	Color
F69C	45x45mm	HDMI,180 degree ,Male HDMI socket,need additional frame size: 45*45mm when installed in SNAP-in frame	white/ black
F71	22.5x45mm	S terminal;soldering connection	white/ black
F81	45x22.5mm	2 way curve switch, 10A, 250V	white/ black
 F83	45x45mm	2 way switch, 10A, 250V	white/ black
F85	45x45mm	Single switch, 16A, 250V, nylon 66, PC coverplate	white/ black
F100B	45x45mm	2 gang 45*45mm modules optional 1*RJ45 +1*RJ11 with for patch panel/floor box	white/ black
F-QB53	45x45mm	Acousto-Optic Delay Switch	

Safewire 45*45mm Fast USB Charger

2.Accessories

2.1 Modules & socket & connector
2.1.2 23*36mm C series Match Panasonic support

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
CP1	23*36mm	Two pin power socket	white/ black	CP2-1	23*36mm	3 Pin Universal power socket	white/ black
CP2-2	23*36mm	Small 3 pin universal socket	white/ black	CP3-1	23*36mm	Two third 5 pin (China socket)	white/ black
CP3-2	34x36mm	A half 5 Pin(China Socket)	white/ black	CP3-3	69x36mm	Big 5 Pin(China socket)	white/ black
CP3-4	69x36mm	10 Pin socket(China socket)	white/ black	CP3-5	69x36mm	5 Pin socket(China socket) with USB chargin	white/ black
CP3-6	23x72mm	5 Pin power socket with RJ data	white/ black	CP3-7	23x72mm	5 Pin power socket with telephone and computer	white/ black
CP3-8	23x72mm	5 Pin power socket with switch	white/ black	 CP4-1	69x36mm	8 Pin Universal socket	white/ black
CP5-1	23x48mm	Thailand 3 Pin power socket	white/ black	CP5-2	23x72mm	Thailand 6 Pin Power socket	white/ black
CP6-1	23x48mm	NEMA5-15R 16A 3 Pin power socket	white/ black	CP6-2	23x72mm	NEMA5-15R 16A 6 Pin power s ocket	white/ black
CP7-1	23x48mm	NEMA5-20R 20A 3 Pin Power socket	white/ black	CP7-2	23x72mm	NEMA5-20R 20A 6 Pin Power socket	white/ black
CP8	23x48mm	13A BS power socket	white/ black	CP9	23x36mm	16A 2 pin Italy power socket	white/ black

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
CD-1-1	23*36mm	2.1A USB	white/ black	CD-1-2A	23*36mm	2.0 USB data solderless /screw fixing	white/ black
CD-1-2B	23*36mm	2.0 USB data straight blade (F-F)	white/ black	CD-1-2C	23*36mm	2.0 USB data /soldering	white/ black
CD-1-2D	23*36mm	2.1A USB Charger with cable	white/ black	CD-1-3A	23*36mm	USB 3.0 Data solder	white/ black
CD-1-3B	23*36mm	USB 3.0 Data straight blade (F-F)	white/ black	CD-1-3C	23*36mm	USB 3.0 with cable	white/ black
CD-2-1	23*36mm	CAT6 RJ45 Computer model	white/ black	CD-2-2	23*36mm	RJ11 telephone models	white/ black
CD-2-3	23*36mm	AMP Bridge	white/ black	CD-2-4	23*36mm	Lucent stents	white/ black
CD-2-5	23*36mm	Double CAT6 bridge	white/ black	CD-3	23*36mm	Computer bridge	white/ black
CD-4	23*36mm	RJ11 Telephone bridge	white/ black	CD-5-1A	23*36mm	15 Pin Female VGA solderless	white/ black
CD-5-1B	23*36mm	15 Pin Female VGA solder	white/ black	CD-5-1C	23*36mm	15 Pin Female VGA solder	white/ black
CD-5-2A	23*36mm	15 Pin Female VGA straight blade	white/ black	CD-5-2B	23x36mm	15 Pin Female VGA 90 elbow	white/ black

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color	Product Picture	Size	Description	Color
CD-5-2C	23*36mm	15 Pin Female VGA with cable	white/ black	CD-5-3A	23*36mm	15 Pin Male VGA solding	white/ black
CD-5-3B	23*36mm	15 Pin Male VGA screw fixing	white/ black	CD-6-1A	23*36mm	HDMI 180 Degree	white/ black
CD-6-1B	23*36mm	HDMI solderless	white/ black	CD-6-1C	23*36mm	HDMI with cable	white/ black
CD-6-1D	23*36mm	Lucent HDMI	white/ black	CD-7-1A	23*36mm	RCA(Audio/Video) Solderless	white/ black
CD-7-1B	23*36mm	RCA(Audio/Video) Straight blade	white/ black	CD-7-2A	23*36mm	AV chromatism solder	white/ black
CP7-2B	23*36mm	AV Chromastism straight blade	white/ black	CD-8-1A	23*36mm	Audio solderless	white/ black
CD-8-1B	23*36mm	Audio straight blade	white/ black	CD-8-1C	23*36mm	Audio solder	white/ black
CD-9-1A	23*36mm	Video solderless	white/ black	CD-9-1B	23*36mm	Video solder	white/ black
CD-10-1A	23*36mm	Microphone solderless	white/ black	CD-10-1B	23*36mm	Microphone solder	white/ black
CD-11-1A	23*36mm	3.5 earphone solderless & straight blade	white/ black	CD-11-1B	23x36mm	3.5 earphone solder	white/ black

Clip-in 128type Panasonic type modules

Product Picture	Size	Description	Color
CD-12	23*36mm	TV socket	white/ black
CD-14-1A	23*36mm	LC Optical fiber	white/ black
CD-14-1C	23*36mm	FC optical fiber	white/ black
CD-15	23*36mm	BNC Monitoring	white/ black
CD-17-1B	23*36mm	8 Pin Female microphone with cable	white/ black
CD-17-2B	23*36mm	6 Pin Female microphone	white/ black
CD-18-B	23*36mm	Acoustics Female	white/ black
CD-19-B	23*36mm	DVI Straight blade	white/ black
CD-20-1B	23*36mm	Male XLR/Canon solder	white/ black
CD-20-2B	23*36mm	DM Female XLR/Canon	white/ black
CD-7D	23*36mm	Empty plate	

Product Picture	Size	Description	Color
CD-13	23*36mm	F socket	white/ black
CD-14-1B	23*36mm	SC Optical fiber	white/ black
CD-15	23*36mm	DC outlet	white/ black
CD-17-1A	23*36mm	8 Pin Female microphone	white/ black
CD-17-2A	23*36mm	6 Pin Female microphone	white/ black
CD-18-A	23*36mm	Acoustics Female	white/ black
CD-19-A	23*36mm	DVI Solder	white/ black
CD-20-1A	23*36mm	Male XLR/Canon solderless	white/ black
CD-20-2A	23*36mm	DM Female XLR/Canon	white/ black
CD-20-5	23x36mm	Duale Female XLR/Canon /Dual microphone	white/ black

2.Accessories

2.1 Modules & socket & connector
2.1.3 45*45mm screwless single/double/triple 45 degree socket , with CE certificate

Picture	Item	Specification	Outline of product
	F15B-1	Color customization single European Schuko Socket without key,more optional color choice, 45 degree for plug easy	16A,250V,2P+E,screw terminals;
	F15B-2	Color customization double European Schuko Socket without key,more optional color choice, 45 degree for plug easy	16A,250V,2P+E,screw terminals;
	F15B-3	Color customization triple European Schuko Socket without key,more optional color choice, 45 degree for plug easy	16A,250V,2P+E,screw terminals;
	F16B-1	Color customization single French Socket without key, white color	16A,250V,2P+E,screw terminals;
	F16B-2	Color customization double French Socket without key, white color	16A,250V,2P+E,screw terminals;
	F16B-3	Color customization triple French Socket without key, white color	16A,250V,2P+E,screw terminals;
	SAQB-45-1	Color customization single French Socket with prtector shutter key,red color;2P+E Tamper proof insert	16A,250V,2P+E,screw terminals;
	SAQB-45-2	Color customization double French Socket with prtector shutter key,red color;2P+E Tamper proof insert	16A,250V,2P+E,screw terminals;
	SAQB-45-3	Color customization triple French Socket with prtector shutter key,red color;2P+E Tamper proof insert	16A,250V,2P+E,screw terminals;

2.Accessories

2.1 Modules & socket & connector
2.1.5 Multi-Media

Product Picture/Item	Specification	Color
M-8081099	Module of **45 x 22.5 mm** compatible with the modular plate system of 80 x 80 mm.It has 2 female RCA connectors for stereo audio and composite video. Module based on 2 female RCA connectors on the front.Shutter option	Grey /Milk white
M-DMT-DB9-F/F	**45*22.5mm** with 9 pins,180°degree of M/F or F/F VGA modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-TV-M	**45*22.5mm** Male socket modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-2XBANANA-F	**45*22.5mm** Solder type Dual female BANANA socket modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-3.5 Audio	**45*22.5mm** Solder type 3.5 Audio jack socket modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-RCA-2	**45*22.5mm** Solder type RCA Stereo audio in white and red color jack socket modules from High grade fireproof PC material panel;	Grey /Milk white
M-DMT-1RCA-RJ45	**45*22.5mm** Solder type RCA red color Audio with RJ45 Jack socket modules from High grade fireproof PC material panel;	Grey /Milk white
M-DMT-3RCA-RJ45	**45*22.5mm** Solder type composite video (1 x RCA female yellow) and for stereo audio (2 x RCA female white and red) with RJ45 jack socket modules ;from High grade fireproof PC material panel;	Grey /Milk white
M-DMT-USB2.0 A	**45*22.5mm** Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel;USB 2.0A with terminal	Grey /Milk white
M-DMT-USB3.0A	**45*22.5mm** Solder type USB 3.0 type A Female connector modules from High grade fireproof PC material panel;USB 3.0A with terminal	Grey /Milk white
M-DMT-PHJ	**45*22.5mm** Solder type HDMI female connector modules from High grade fireproof PC material panel;HDMI with terminal	Grey /Milk white

Product Picture/Item	Specification	Color
M-DMT-VGA-M/F	**45*22.5mm** with 15 pins,180°degree of M/F or F/F VGA modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-TV-F	**45*22.5mm** Female socket modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-BANANA-F	**45*22.5mm** Solder type Single female BANANA socket modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-BNC-F-F	**45*22.5mm** Solder type female BNC socket modules from High grade fireproof PC material panel	Grey /Milk white
M-DMT-RCA-1	**45*22.5mm** Solder type RCA red color Audio jack socket modules from High grade fireproof PC material panel;This RCA audio connector is pure copper with gold plating and anti-oxidation; Female F equipment Jacks to an RCA female connection	Grey /Milk white
M-DMT-RCA-3	**45*22.5mm** Solder type composite video (1 x RCA female yellow) and for stereo audio (2 x RCA female white and red)jack socket modules ;from High grade fireproof PC material panel;	Grey /Milk white
M-DMT-2RCA-RJ45	**45*22.5mm** Solder type RCA red color Audio with RJ45 Jack socket modules from High grade fireproof PC material panel;	Grey /Milk white
M-DMT-USB2.0-AF	**45*22.5mm** Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel;Join two USB 2.0 Type-A Male connectors with this coupler connector.	Grey /Milk white
 M-DMT-USB2.0A-RJ45	**45*22.5mm** Solder type USB 2.0 type A Female connector modules from High grade fireproof PC material panel;USB 2.0A with RJ45	Grey /Milk white
M-DMT-HDMI	**45*22.5mm** Solder type HDMI female connector modules from High grade fireproof PC material panel;HDMI with terminal	Grey /Milk white

2.Accessories

2.1 Modules & socket & connector
2.1.6 RJ45 Modules

Product Picture	Size	Description	Product Picture	Size	Description
M-NE-182	25*38mm	unshielded, Krone IDC, RJ45 module	M-NE-182A	25*38mm	unshielded, Dual IDC, RJ45 module
M-NE-88B	25*50mm	unshielded, Krone IDC, RJ45 module	M-NE-189A	25*50mm	unshielded, Dual IDC, RJ45 module

2.Accessories

2.1 Modules & socket & connector
2.1.8 USB,L AN,HDMI and RJ11 with cable

H-USB-06		180 degree USB2.0A/USB 2.0B adaptor	H-USB-08		180 degree USB 2.0A/USB 2.0A coupler/socket
H-USB-08C		90 degree USB2.0A/USB 2.0A Coupler/socket	H-USB-08D		180 degree USB3.0A/USB 3.0A Coupler/socket
H-USB-08E		90 degree USB3.0A/USB 3.0A Coupler/socket	 H-USB-07		180 degree RJ45/USB2.0A coupler/adaptor
H-HDMI-20		180 degree HDMI Female-Female adaptor	H-HDMI-20B		90 degree HDMI Female-Female adaptor

2.Accessories

2.1 Modules & socket & connector
2.1.8 USB,L AN,HDMI and RJ11 with cable

Product Picture/Item	Catagories	Description	Color
H-USB-08-KSB	90 degree USB adaptor with USB socket and 0.8M cable	1). Type:USB 2.0A/USB 2.0A; 2).Materia of shield:ABS; 3). Material of cable: PVC; 4).Degree:90; 5).Nickel Brass Chrome Adapter ; 6).0.8M length USB cable ;	Black/ White
H-HDMI-KSB	HDMI with 1.5 Meter length cable	1) Male/Female HDMI With 15cm Cable（Length no less than 15cm) 2)Supports HDMI 2.1 Data Rate up to 48Gbps, 8K60Hz, 4K120Hz 3)additional frame size: 45*45mm when installed in SNAP-in frame	Black/ White
SFS-TB1-WP	Waterproof LAN with Cable	1)IP67 2)Type: Cat5E, Unshielded ABS plastic RJ45 3)Materia of shield： PA6BG33 4)Degree: 180 5)Locking device, screw fastening 6) 1M length LAN 24 AWG cable	Black
SHDMI-BJ1-WP	Waterproof HDMI with Cable	1)IP67 2)Type: HDMI 2.0 3)Materia of shield： PA6BG33 4)Degree: 180 5)Locking device, screw fastening 6) 1M HDMI cable	Black

Product Picture/Item	Catagories	Description	Color
R-NE-68B-KSB	LAN Adaptor and 0.8 M LAN cable	1).Type:CAT5e,Unshielded ABS plastic RJ45 2).Materia of shield:ABS RAL9010; 3).Degree:180; 4).Plating 50U Contact ; 5).0.8M length LAN 24 AWG cable ;	Black/ White
H-RJ11-KSB	Rj11telephone with cable	1)Type: RJ11 Tephone with 1.5m Cable 2)Material of shied: ABS RAL9010 3)Degree: 180	Black/ White
SFS-TB2-WP	Waterproof LAN with Cable	1)IP67 2)Type: Cat6, Unshielded ABS plastic RJ45 3)Materia of shield： PA6BG33 4)Degree: 180 5) Locking device, screw fastening 6)1M length LAN 24 AWG cable	Black
SUSB3-BJ2-WP	waterproof USB with Cable	1)IP67 2)Type: USB 3.0 3)Materia of shield： PA6BG33 4)Degree: 180 5)Locking device, screw fastening 6) 1M USB cable	Black

2.Accessories

2.1 Modules & socket & connector
2.1.9 Keystone

Product Picture	Description	Material	Color
KNE-217	CAT6, unshielded 110 IDC data keystone	Polycarbonate	Black/ White
KNE-170	CAT6, Low Profile unshielded data keystone	Polycarbonate	Black/ White

Product Picture	Description	Material	Color
KNE-217S	CAT5e,110 IDC Zinc alloy shielded	Polycarbonate	Black/ White
KNE-176	CAT3, Low Profile unshielded telephone 6P6C keystone	Polycarbonate	Black/ White

2.Accessories

2.1 Modules & socket & connector
2.1.9 Keystone

Product Picture	Description	Material	Color
SFHB-4006-C3-6	CAT3, unshielded telephone keystone; 90 degree toolless wire bonding; Six core	Polycarbonate	Black/ White
SFHB-8017-C5	Cat5e, shielded data keystone; 90 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
 SFTD-M2101-C6A	Cat6A, shielded data keystone; 180 degree toolless wire bonding;Zinc alloy shell	Polycarbonate	Gray
SFTD-M2101-C5E	Cat5E, Pass-through shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
SFHB-8058-C3	Cat3, Pass-through unshielded telephone socket; 90 degree wiring	Polycarbonate	Black/ White
SFHB-8058-C6	Cat6, Pass-through unshielded data keystone; 90 degree wiring	Polycarbonate	Black/ White

Product Picture	Description	Material	Color
SFHB-4006-C3-4	CAT3, unshielded telephone keystone; 90 degree toolless wire bonding; Four core	Polycarbonate	Black/ White
SFHB-8017-C6	Cat6, shielded data keystone; 90 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
 SFTD-M2101-C7	Cat7, shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
SFTD-M2101-C6	Cat6, Pass-through shielded data keystone; 180 degree toolless wire bonding; Zinc alloy shell	Polycarbonate	Gray
SFHB-8058-C5E	Cat5E, Pass-through unshielded data keystone; 90 degree wiring	Polycarbonate	Black/ White
SFTD-8014-C5E	Cat5E, unshielded data keystone; 180 degree toolless wire bonding;	Polycarbonate	Black/ White

2.Accessories

2.1 Modules & socket & connector
2.1.10 RJ45 Jack&Coupler

Product Picture/Item	Description	Material	Color
 R-NE-68B	CAT5e,Unshielded ABS plastic RJ45 Jack/Jack; TIA/EIA:568A/B coded; Wiring:Toolless; Type:Unshielded; Angle:180°;Wire Gauge Supported:22-26AWG Cable;	Polycarbonate	Grey/ Milk white
R-NE-216AS	CAT6,Zinc alloy , shielded 110 IDC RJ45 Jack/Jack;Toolless 568A/B coded	Zinc alloy	Silver
R-NE-172S	CAT5e,shielded Nickel plating RJ45 Jack/Jack	Polycarbonate	Nickel plating
R-US-08TS	CAT5e,shielded Nickel plating double-side board RJ45 Jack/Jack	Polycarbonate	Nickel plating

Product Picture/Item	Description	Material	Color
R-NE-68S	CAT5e,shielded Nickel plating RJ45 Jack/Jack; Shielded STP Cover: Designed for protection from external radiated noise;50 µinch Gold Plating:On the jack contacts for durability and a long life;	Polycarbonate	Nickel plating
R-NE-59S	CAT5e,shielded Chromeplate chroming RJ45 Jack/Jack	Zinc alloy	Chrome
R-US-08T	CAT5e,unshielded double-side board RJ45 Jack/Jack	Polycarbonate	Grey/ Milk white
R-US-08S	8P8CS,shielded Nickel plating RJ45 Jack/Jack	Polycarbonate	Nickel plating

2.Accessories

2.1 Modules & socket & connector
2.1.11 Junction box for Network

Product Picture/Item	Description	Material	Color
J-NE-200A	CAT5e/6 66*36*25.7mm unshielded ABS junction box;Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.;Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Polycarbonate	Grey/ Milk white

Product Picture/Item	Description	Material	Color
 J-NE-200AS	CAT5e/6 66*36*25.7mm shielded chromelate chroming junction box; Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.; Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Zinc alloy	Chrome

2.Accessories

2.1 Modules & socket & connector
2.1.11 Junction box for Network

Product Picture	Description	Material	Color
J-NE-200	CAT5e/6 84*37*23mm unshielded ABS junction box;Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.;Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Polycarbonate	Grey/ Milk white
J-NE-13	Single port unshielded surface RJ45 Jack;Single port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-NE-37	Dual ports unshielded surface RJ45 Jack;Use the same tried and true 110 Style punch downs, which have phosphor bronze contacts;Two port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-6117031	Single port surface box; Single port surface mount boxes allow for base or side entry of cable	Polycarbonate	Nickel plating
J-NE-138	Four ports surface box; Four ports surface mount boxes allow for base or side entry of cable.	Polycarbonate	Nickel plating
J-NE-139	Six ports surface box; Six ports surface mount boxes allow for base or side entry of cable.	Polycarbonate	Grey/ Milk white

Product Picture	Description	Material	Color
J-NE-200S	CAT5e/6 84*37*23mm shielded chromelate chroming junction box; Converts: Converts back and forth between 2 CAT6 Ports and 110 Punch Down.;Come with a double sided adhesive pad that allows creative mounting almost anywhere which holds up even in the most aggressive environments.	Zinc alloy	Chrome
J-NE-53	Single port shielded surface RJ45 Jack;Use the same tried and true 110 Style punch downs, which have phosphor bronze contacts;Single port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-NE-54	Dual ports shielded surface RJ45 Jack;Use the same tried and true 110 Style punch downs, which have phosphor bronze contacts;Two port surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-6117032	Dual port surface box; Dual ports surface mount boxes allow for base or side entry of cable	Polycarbonate	Grey/ Milk white
J-NE-140	Six ports surface box; Six ports surface mount boxes allow for base or side entry of cable.	Polycarbonate	Grey/ Milk white

2.Accessories

Switch Socket & USB charger
RCD Switch Socket

RCD0130FPW

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS5733
Description	RCD Fuse spur unit PC clad

RCD0130PW

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Single RCD plastic socket, unswitch

RCD0130SPW

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Single RCD plastic socket, switch

RCD0230PW

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Twin RCD plastic socket,unswitch

RCD0230SPW

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	PC
Standard	CE BS7288 BS1363
Description	Twin RCD plastic socket,switch

RCD0130SMG

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	with a metal box, with switch
Standard	CE BS7288 BS1363
Description	Single RCD metald socket,switch

RCD0130FMG

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
material	with a metal box
Standard	CE BS7288 BS1363
Description	RCD Fuse spur unit Metal clad

RCD0230SMG

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	with a metal box, with switch
Standard	CE BS7288 BS1363
Description	Double RCD metal socket, switch

2.Accessories

Switch Socket & USB charger
RCD Switch Socket

RCDZA30PW/B

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	BS RCD Portable Adaptor (Passive/Active)

RCDZE30PW/B

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS1363
Description	SAA RCD Portable Adaptor (Passive/Active)

RCD0230SPWA

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	Twin RCD Plastic socket with switch

RCDZA30PWA

Ratings	13A 240V
Rated trip current	30mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	RCD Portable Adaptor (Active)

BG0106P-A

Ratings	13A 240V
Rated trip current	4~6mA
Trip speed	less than 40mS
Material	PC
Standard	CE BS7288 BS1363
Description	Portable Ground-Fault Circuir-Interrupters

L30PBA

Specifications	10A IN-LINE RCD
Connect	Single
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40mS
Material	PC

L30PBG

Specifications	16A IN-LINE RCD
Connect	Single
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40mS
Material	PC

BG0206S-A/B/C/D

Specifications	Ground-Fault Circuit -Interrupters(GFCImodules)
Connect	Double
With/no switch	No switch
Leakage protection current	30mA
Trip speed	Less than 40mS
Material	PC

2.Accessories

2.3 Waterproof cover plate&splash cover

SF-HM09-MZ-ABS-W

Material	ABS Plastic
Size	One size 86
Color	White



SF-HM09-MZ-ABS-B

Material	ABS Plastic
Size	One size 86
Color	Blue

SF-HM09-MZ-PS-W

Material	PS
Size	One size 86
Color	White

SF-HM09-MZ-ABS-Y

Material	ABS Plastic
Size	One size 86
Color	Yellow

SF-HM02-F

Material	PVC
Size	One size 86
Color	White

SF-HM03-F

Material	PVC
Size	One size 86
Color	White

SF-HM04-F

Material	PVC
Size	One size 86
Color	White

SF-HM06-F

Material	PVC
Size	One size 86
Color	White

2.Accessories

2.3 Waterproof cover plate&splash cover

SF-HM07-F

Material	PVC
Size	One size 86
Color	White

SF-HM17

Material	PP
Size	One size 86
Color	Brown

SF-HM19

Material	PP
Size	One size 86
Color	White

SF-HM18-1

Material	ABS Plastic
Size	One size 86
Color	White

SF-HM18-2

Material	ABS Plastic
Size	One size 86
Color	Brown

SF-HM18-3

Material	ABS Plastic
Size	One size 86
Color	White

SF-HM18-4

Material	ABS Plastic
Size	One size 86
Color	White

GN-2

Material	PVC
Size	Double size 86
Color	White

2.Accessories

2.3 Waterproof cover plate&splash cover

GN-3

Material	PVC
Size	Triple size 86
Color	White

GN-22

Material	PS
Size	Double size 86
Color	White

GN-32

Material	PS
Size	Triple size 86
Color	Brown

SF-HM14-1

Material	ABS Plastic
Size	
Color	White



SF-HM14-5

Material	PS
Size	
Color	Black

ZT-21

Material	PS
Size	118 2way
Color	White

ZT-22

Material	PS
Size	118 2way
Color	Blue

ZT-32

Material	PS
Size	118 3way
Color	Blue

2.Accessories

2.3 Waterproof cover plate&splash cover

ZT-42

Material	PS
Size	118 4way
Color	blue

C-1-ABS

Material	ABS Plastic
Size	86*86mm
Color	White



C-2-ABS

Material	ABS Plastic
Size	86*86mm
Color	White

S1-W

Material	PC
Size	Type 86 + Phone holder
Color	White

S1-G

Material	PC
Size	Type 86 + Phone holder
Color	White

S1-B

Material	PC
Size	Type 86 + Phone holder
Color	White

S2-W

Material	PC
Size	Type 86 + Phone holder
Color	White

S2-G

Material	PC
Size	Type 86 + Phone holder
Color	White

2.Accessories

2.1 Modules & socket & connector
2.2.2 Clad Metal Switch Socket

Product Picture/Item	Feature	Specification	Product Picture	Feature	Specification
E42613SR	1). Single Pole; 2). **Meet BS1363 standard; Intertek test conformity report#19061168HKG-001;** 3).Clad Metal switch socket;	1).13A Single switch socket; 2). All switch & sockets are fixed with wiring box.	E42613SDR	1). Single Pole; 2). **Meet BS1363 standard; Intertek test conformity report#19061167HKG-001;** 3).Clad Metal switch socket;	1).13A Double switch socket; 2). All switch & sockets are fixed with wiring box.
SF-8336SR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).13A Single switch socket; 2). All switch & sockets are fixed with wiring box.	SF-8336SLR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).13A Single switch socket with light; 2). All switch & sockets are fixed with wiring box.
SF-8336SDR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).13A Double switch socket; 2). All switch & sockets are fixed with wiring box.	SF-8336SLDR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).13A Double switch socket with light; 2). All switch & sockets are fixed with wiring box.
SF-UK811R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).1 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	SF-UK812R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).1 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
SF-UK821R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).2 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	SF-UK822R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).2 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
SF-UK831R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).3 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	SF-UK832R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).3 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
SF-UK841R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).4 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	SF-UK842R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).4 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.

2.Accessories

2.1 Modules & socket & connector
2.2.2 Clad Metal Switch Socket

Product Picture/Item	Feature	Specification	Product Picture/Item	Feature	Specification
SF-UK861R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).6 gang 1 way switch; 2). All switch & sockets are fixed with wiring box.	SF-UK862R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).6 gang 2 way switch; 2). All switch & sockets are fixed with wiring box.
SF-UK820LR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).20A DP Switch with light; 2). All switch & sockets are fixed with wiring box.	SF-UK845LR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).45A DP Switch with light; 2). All switch & sockets are fixed with wiring box.
SF-8315SR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).15A Single switch socket; 2). All switch & sockets are fixed with wiring box.	SF-8315SLR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).15A Single switch socket with light; 2). All switch & sockets are fixed with wiring box.
SF-81UTR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Telephone socket; 2). All switch & sockets are fixed with wiring box.	SF-UK81VR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Single Television Socket; 2). All switch & sockets are fixed with wiring box.
SF-UK82VR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Double Television Socket; 2). All switch & sockets are fixed with wiring box.	SF-E328R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Single Fan Dimmer; 2). All switch & sockets are fixed with wiring box.
SF-E318TR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Twin light Dimmer; 2). All switch & sockets are fixed with wiring box.	SF-E318R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Single Light Dimmer; 2). All switch & sockets are fixed with wiring box.
SF-E818R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Single Light Dimmer; 2). All switch & sockets are fixed with wiring box.	SF-E818TR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Twin Light Dimmer; 2). All switch & sockets are fixed with wiring box.

2.Accessories

2.1 Modules & socket & connector
2.2.2 Clad Metal Switch Socket

Product Picture/Item	Feature	Specification	Product Picture/Item	Feature	Specification
SF-E828R	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Single Fan Dimmer; 2). All switch & sockets are fixed with wiring box.	SF-E828TR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Twin Fan Dimmer; 2). All switch & sockets are fixed with wiring box.
SF-81VR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Single TV Socket; 2). All switch & sockets are fixed with wiring box.	SF-82VR	1). Single Pole; 2). With **CB** certficate and report; 3).Clad Metal switch socket;	1).Double TV Socket; 2). All switch & sockets are fixed with wiring box.

2.Accessories

2.1 Modules & socket & connector
2.2.3.1 86*86 wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
SF-86-USB-18B	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded Schuko outlet; 3).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024,IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles:2P+E; 15). Package: Blister or plastic into master carton;
SF-86-USB-19B	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of various types of global apple, Android and other devices. 2). AC wall socket module with single grounded French outlet; 3).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: French socket; 8).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles:2P+E; 15). Package: Blister or plastic into master carton;

2.Accessories

2.1 Modules & socket & connector
2.2.3.1 86*86 wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
SF-86-USB-28B	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded BS 13A outlet; 3).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 13A; 7). Receptacle: BS socket; 8).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
SF-86-USB-23B	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded universal outlet; 3).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 10A; 7). Receptacle: Universal socket; 8).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
SF-86-USB-27	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SFX-86-USB-59	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).MAX 5V dual 4.2A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports;type A/type C; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;

2.Accessories

2.1 Modules & socket & connector
2.2.3.1 86*86 wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
SF-USB-59J-I-QC3.0	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).QC3.0 3A/5V,2A/9V USB output power; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SF-USB-59J-I-PD	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).QC3.0 3A/5V,2A/9V USB output power ,for I PAD; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 86mm x 86mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SF-USB-43E	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with duplex grounded Schuko outlet; 3).MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).duplex Schuko socket with 2*dual port USB charger; 4).USB Output: 5V 2.4A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8).Dimension L*W*D: 146mm x 75mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
SF-USB-46E	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with duplex grounded French outlet; 3).MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).duplex French socket with 2*dual port USB charger; 4).USB Output: 5V 2.4A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: French socket; 8).Dimension L*W*D: 146mm x 75mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;

2.Accessories

2.1 Modules & socket & connector
2.2.3.2 80*80mm wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
SF-80-USB-43B	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples s table and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded Schuko outlet; 3).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
SF-80-USB-46B	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded French outlet; 3).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: French; 8).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
SF-80-USB-17B-C	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).MAX 5V dual 2.1A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.1A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SF-80-USB-17E	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).MAX 5V dual 4.2A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports;type A/type C; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;

2.Accessories

2.1 Modules & socket & connector
2.2.3.2 80*80mm wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
SF-USB-17J-C-QC3.0	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).QC3.0 3A/5V,2A/9V USB output power; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SF-USB-17I-PD	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).QC3.0 3A/5V,2A/9V USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).QC3.0 3A/5V,2A/9V USB output power ,for I PAD; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SF-80-USB-53	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2).1*2.1A+1* 4.2A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 3). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports;1*2.1A+1*4.2A; 4).USB Output: 5V 4.2A in total 6).Input: 100~240V~50/60Hz,0.4A 7).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 8).Provision for earthing: With earthing contact; 9).Degree of protection against electric shock: With increased protection; 10).Automatic distribution current, over charge protection, short circuit protection 11).Type of terminals: Screw-type; 12). Package: Blister or plastic into master carton;
SF-80-USB-54	1).Dual charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded Schuko outlet; 3).MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With 2/dual USB ports; 4).USB Output: 5V 2.4A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;

2.Accessories

2.1 Modules & socket & connector
2.2.3.2 80*80mm wall Flush-mounting USB charger

Product Picture/Item	Feature	Specification
 SF-80-USB-54B	1).Single charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded Schuko outlet; 3).MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With single USB ports; 4).USB Output: 5V 2.4A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;
 SF-80-USB-54C	1).Single charge USB charging port: can be supplied for both 2 sets of equipment at high speed. Power supples stable and can be use of vaious types of global apple, Android and other devices. 2). AC wall socket module with single grounded Schuko outlet; 3).MAX 5V dual 2.4A USB output power, really output be certificated by CE,IEC60950 FOR LVD and IEC55024, IEC61000 for EMC; 4). All materials be RoHS directive tested	1).Main material: PC; 2).Color: White 3).With single USB ports; 4).USB Output: 5V 2.4A in total 5).Input: 100~240V~50/60Hz,0.4A 6).Rated Current: 16A; 7). Receptacle: Schuko(European socket); 8).Dimension L*W*D: 80mm x 80mm x 46.5mm;(Minimum Mounting Box Depth:45mm) 9).Provision for earthing: With earthing contact; 10).Degree of protection against electric shock: With increased protection; 11).Automatic distribution current, over charge protection, short circuit protection 12).Type of terminals: Screw-type; 13).Existence of shutter: With; 14).Number of poles: 2P + E; 15). Package: Blister or plastic into master carton;

Wall flush-mounting 80*80 mm series only 2.0A USB charger with individual indicator

2.Accessories

2.2.4 Switch socket
2.2.4 Single/Double/Twin switch socket for floor box

Product Picture/Item	Specification	Materials/Color	Product Picture/Item	Feature	Materials/Color
HT-86SS	13A1 gang switched socket, single pole	PC White	HT-146TS	13A 2 ang switched socket, single pole	PC White
SCF-SSS	13A 2 ang switched socket, single pole for floor box	PC White	SA-146WF	WIFI Duplex 2 gang switch socket	PC White
SM-F21-1	Single gang flat faceplate with IP44 CE certificate pop up French socket	PC White	SM-F21-2	Single gang bevelled faceplate with P44 CE certificate pop up French socket	PC White
SF-80-S-54	80*80mm Schuko/Euro socket	PC White	SF-80-S-65	80*80mm 65W Type C USB Charger	PC White

2.5 Frame & Faceplate & Bottom

2.5.1 Frame and Bridges/Calipers for modules

SAP024

SAP025

SAP026

SAP027

SAP028

SAP030


SAP031


SAP032

SAP01

SAP02

SAP03


SADF01

2. 5.2 Metal bottom box

HTD-120JH
120x 120x60mm

B-H622-C
For HTD-622


HTD-200JH
100x200x55mm


B-H622-C
For HTD-622


B-H624-C
For HTD-624


B-H628-C
For HTD-628

2.Accessories

Keystone & Shutter & Data & Jack
2.5.2 Shutter

Product Picture/Item	Specification	Panel Materials
SNE-87	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:22.5*45mm /0.89" /1.78" 3). Lable paper is option;	fire-retardant plastic
SNE-41	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:25*50mm /0.98" /1.96" 3). Lable paper is option;	fire-retardant plastic
SNE-47	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:50*50mm /1.96" /1.96" 3). Lable paper is option;	fire-retardant plastic
SNE-296	1).Dual ports; 2).Plate Dimension:80*80mm /1.96" /1.96" ; 3). with ID-station label;	fire-retardant plastic

Product Picture/Item	Specification	Panel Materials
SNE-210	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:45*45mm /1.78" /1.78" ; 3). Lable paper is option;	fire-retardant plastic
SNE-89	1).Plastic: High-impact thermoplastic that is rated UL94V-0 fire-retardant. 2).Dimension:25*50mm /0.98" /1.96" 3). Lable paper is option;	fire-retardant plastic
SNE-295	1).Single port; 2).Plate Dimension:80*80mm /1.96" /1.96" ; 3). with ID-station label;	fire-retardant plastic
SNE-297	1).Triple ports; 2).Plate Dimension:80*80mm /1.96" /1.96" ; 3). with ID-station label;	fire-retardant plastic

2.Accessories

Keystone & Shutter & Data & Jack
2.5.3 Faceplate

Product Picture/Item	Description	Materials
F-8081106	**45*45mm** Cable outlet mask	Polycarbonate
F-8075164	**45*45mm** faceplate for empty	Polycarbonate
F-8075163	**45*45mm** faceplate for VGA	Polycarbonate
F-6117079	Single gang flat faceplate for **45*45mm** modules	Polycarbonate
F-8081002	**50*50mm** Dual port Faceplate for HDMI	Polycarbonate

Product Picture/Item	Description	Materials
F-8081035	**45*45mm** Cable outlet mask	Polycarbonate
F-8075162	**45*45mm** faceplate for USB charger	Polycarbonate
F-6117080	Single gang bevelled faceplate for **45*45mm** modules	Polycarbonate
F-8081036	**50*50mm** Single port Faceplate for HDMI	Polycarbonate
F- 8081005	**50*50mm** Faceplate for HDMI and 1 RCA	Polycarbonate

2.Accessories

Keystone & Shutter & Data & Jack
2.5.3 Faceplate

Product Picture/Item	Description	Materials	Product Picture/Item	Description	Materials
F-8081004	**50*50mm** Faceplate for HDMI and 2 RCA	Polycarbonate	F-8081003	**50*50mm** Faceplate for HDMI and 3 RCA	Polycarbonate
F-8081107	**50*50mm** Cable outlet mask	Polycarbonate	F-8081044	**80*80mm** single gang bevelled Faceplate with frame	Polycarbonate
F-8081045	**80*80mm** double gang flat Faceplate with frame	Polycarbonate	F-8081204	**80*80mm** single gang flat Faceplate with frame	Polycarbonate
F-8081028	**86*86mm** Single port for 25*50mm modules	Polycarbonate	F-8081071	**86*86mm** flat single gang Single port for 50*50mm modules	Polycarbonate
F-8081072	**86*146mm** double gang Faceplate	Polycarbonate	F-8081205	**86*86mm** flush-mounting bevelled plate with frame	Polycarbonate
HB86M1-1/2	**86*90mm** Black/Gold/White color Single/Dual port Datafaceplate	Polycarbonate	HB86M2	**86*90mm** Black/Gold/White color 1/2/3/4 port Datafaceplate	Polycarbonate

2.Accessories

Bottom box
2.5.4 Plastic bottom box

Product Picture	Item	Catagories	Description	Color
	B-8080072	80*80mm box	Size:80*80*40mm bottom box, Height:40mm; For 80 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080075	80*80mm box	Size:80*80*36mm Low profile bottom box, Height:36mm; For 80 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080062	86*86mm box	Size:86*86*35mm bottom box, Height:35mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080052	86*86mm box	Size:86*86*28mm Low profile bottom box, Height:28mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080063	86*146mm box	Size:86*146*35mm bottom box, Height:35mm; For 86 single gang type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080100	115*70*36mm box	Size:115*70*36mm bottom box, Height:36mm; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	B-8080101	115*70*47mm box	Size:115*70*36mm bottom box, Height:47mm; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white

2.Accessories

Bottom box
2.5.4 Plastic bottom box

Product Picture	Item	Catagories	Description	Color
	B-8080074	86*86mm box	Size:86*86*28mm scline 45 degree bottom box, Height:73mm; For 86 type modules; Thickened bottom box:Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	red/black/ white
	B-8080073	86*146mm box	Size:86*146*73mm bottom box, Height:73mm; For 146 double gang type modules; Thickened bottom box: Adopt flame retardant PVC material, high temperature resistance, good load-bearing performance; The bottom box has multi-function nail hole, easy to install;	Grey/Milk white
	SFD86-5-38	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screwes; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*38mm ;height :38mm	Red/black/ white
	SFD86-5-45	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screwes; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*45mm ;height :45mm	Red/black/ white
	SFD86-5-50	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screwes; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*50mm ;height :50mm	Red/black/ white
	SFD86-7-38S	86*86mm box	86 fireproof box(2.5) four direction connecting height:38mm	Red/black/ white
	SFD86-7-38D	86*86mm box	86 fireproof box(2.5) four direction connecting height:38mm	Red/black/ white

2.Accessories

Bottom box
2.5.4 Plastic bottom box

Product Picture	Item	Catagories	Description	Color
	SFD86-7-45S	86*86mm box	86 fireproof box(2.5) four direction connecting height:45mm	Red/black/ white
	SFD86-7-45D	86*86mm box	Sealess 86 type plastic box; Feature: 1). Sealess gap between boxes; 2).Stainless galvanized fixing screwes; 3). 12 slots for fixing technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*38mm ;height :45mm	Red/black/ white
	SFD86-7-50S	86*86mm box	Tradational 86 type plastic box; Feature: 1). Close gap between boxes; 2).Stainless galvanized fixing screwes; 3). Three-point positioning design technology; 4).Good sealing, prevent leakage; 5). Easy-installation;dimension:86*86*45mm ;height :50mm	Red/black/ white
	SFD86-7- 50D	86*86mm box	86 fireproof box(2.5) four direction connecting height: 50mm	Red/black/ white

A series

SF-A1-87-2

Champagne gold color; warm light; Aluminum wire drawing induction footlight;

SF-A1-87-5

deep silver color; warm light; Aluminum wire drawing induction footlight;

SF-A1-87-6

black color;warm light; Aluminum wire drawing induction footlight;

SF-A1-87-7

glass white color;warm light; Aluminum wire drawing induction footlight;

B series (Legrand type)

SF-B1-87-1

white color; warm light; induction footlight;

SF-B1-87-2

champagne gold color; warm light; induction footlight;

SF-B1-87-5

deep silver color; warm light; induction footlight;

SF-B1-87-6

black color; warm light; induction footlight;

SF-B1-89-1

white color; white light; induction footlight;

SF-B1-89-2

champagne gold color; warm light; footlight;

SF-B1-89-6

black color; warm light; footlight;

SF-B1-89-5

silver color; warm light; footlight;

SF-B1-89

white color; warm light; induction footlight;

C series

SF-C-87-1

white color; white light;
bend footlight;

SF-C-87-2

black color; white light;
bend footlight;

SF-C-87-3

Gray color; warm light;
bend footlight;

SF-C-87-4

champagne gold color;
warm light; bend footlight;

SF-C-87-5

gold color; white light;
bend induction footlight;



SF-C1-88-1

champagne gold color;
warm light; plane footlight



SF-C1-88-2

white color; white light;
plane footlight

SF-C2-89

champagne gold color;
white light; bend footlight;

SF-C2-89-1

black color; white light;
bend footlight;