

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Pop up floor socket/Serviced power

PRODUCT No. : HTD-26



HTD-26

ADD: 152 xinguang industrial zone, yueqing city, zhejiang province

(TEL) :0086-577-62799688

(E-mail) : info@safewirele.com

(WEB): <http://www.safewirele.com>



Technical parameters & characteristic :

1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A

2) Characteristic:

1	Model	HTD-26	6	HS Code	8536690000
2	Brand Name	Safewire or OEM brand	7	Market standard	Customized
3	Type	floor socket	8	Place of origin	Zhejiang , Wenzhou, China
4	Color	Golden, silver	9	Frequency	50Hz~60Hz
5	Grounding	Standard grounding	10	Current Type	AC

3) Technical parameters :

Serial No.	Parameter	Description
1	Panel Material	Brass alloy/Alu alloy
2	Surface finish	Wire drawing/Polishing/Spray painting
3	Panel Dimension(mm)	146*146
4	Cutout(mm)	125*125
5	Capacity of modules	4 ways modules
6	Bracket material	Zinc Alloy & Alu Alloy
7	Sink box Thickness	1.2mm
8	Sink box Material	Steel+Zinc plated
9	Available modules	45*45mm or 45*22.5mm
10	Damping device (DP)	Normal Pop-up & Soft Pop-up available
11	N.W(kg)	1.50 (Brass alloy);1.20(Alu alloy)
12	G.W(kg)	18.6 (Brass alloy);14.6(Alu alloy)
13	Carton size(cm)	49x32x22




SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

Application:

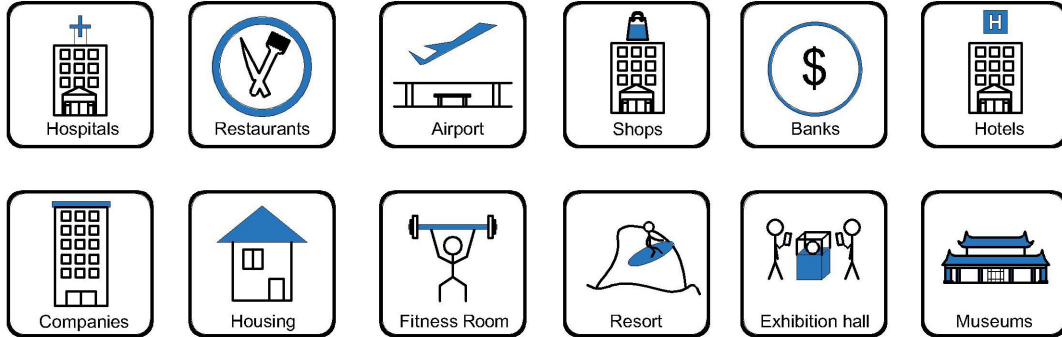


- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;



CE certificate by TUV,Germany



LVD test report

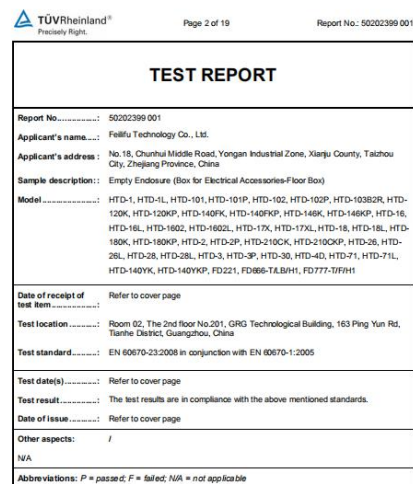

Product Show:




Brass color

Silver color

Features:

1. More outlet capacity: double power socket or one power socket + RJ45 computer +RJ11 telephone/2.1A USB charger.
2. Reliable press button: > 5000 times.
3. 3 Durable receptacle: Elastic phosphor copper ,high conductivity, pulling and plugging > 15000 times.

1.Easy-Installation

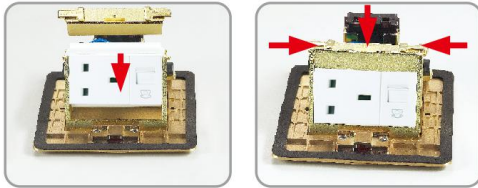

3.Safety Damping Device




Pop-up Slowly



More Safety




Soft Pop-up
Code:ZN



10 times

The opening speed of which is 10 times slower than regular products.

2.Fast-Wiring

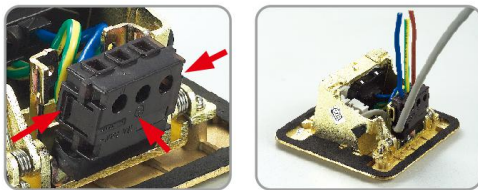






















4.Heavy Material Box




Available for F type 45*45mm type or D type22.5*45mm international sockets or modules types:

SAFEWIRE

45 Type Function Accessories

									
F2	F3	F4	F11	F15	F16	F18			
									
F20	F21	F22	F23	F24	F25	F26	F27	F28	F29
									
F30	F32	F33	F34	F35					


HTD-26 Outline drawing:

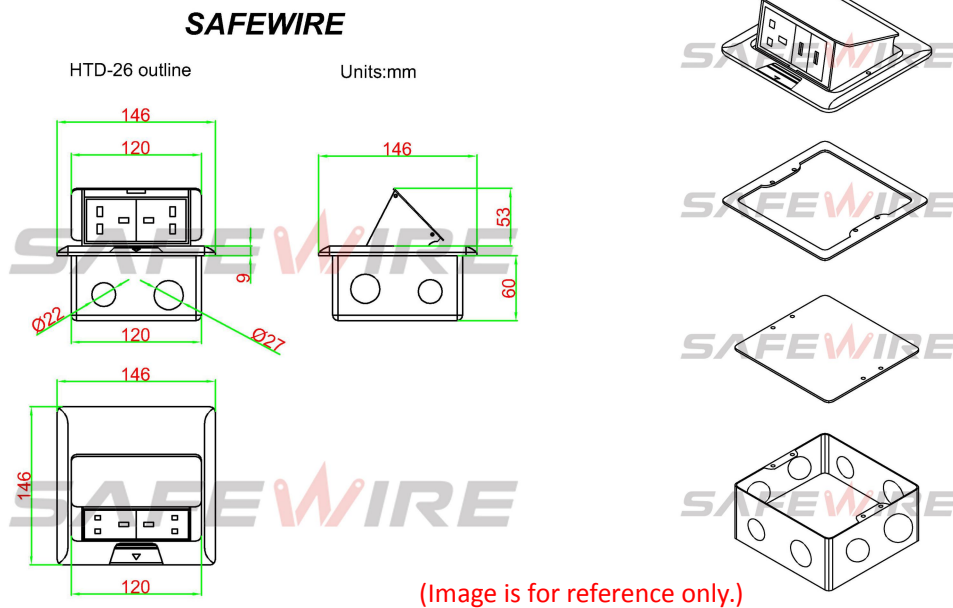

Package:12 Pcs inner box into a master carton.Poly bag with box packing.

SafeWire


Package solution

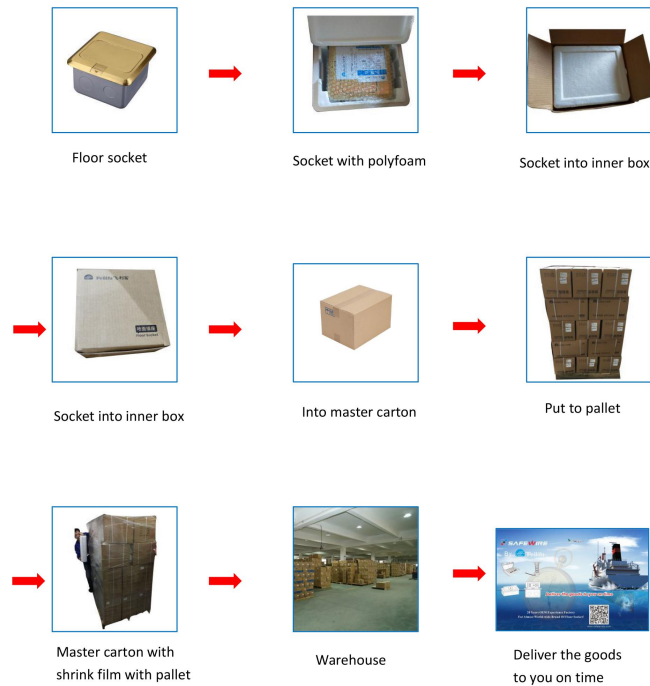


www.safewirele.com

Installation Guide

1. Cut out size : 123*123mm.Install the bottom box with panel into the specified location.
2. Screw mounting frame and panel(for desktop only).
3. Fix the panel and bottom box with screws(This item is for ground installation only).
4. ADjust the tightness of all wiring lines (no influence on opening).



(1)

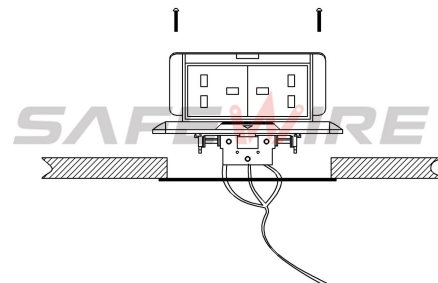


(2)




SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604

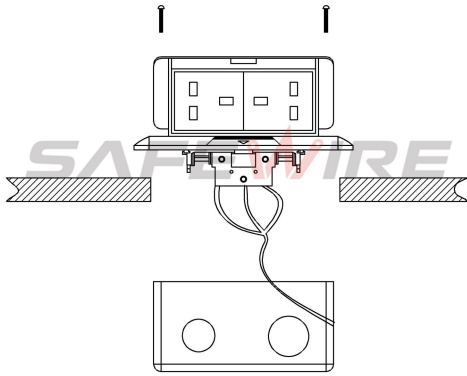

(3)

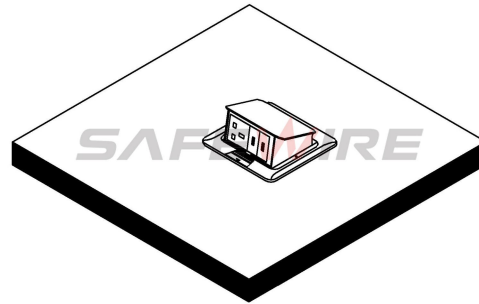

(4)

Attentions:

- 1.Dispose of trash in bottom box and prevent dirt and debris from entering inside.
- 2.The sealing ring is closely attached to the smooth surface to prevent water leakage.
- 3.Prevent from alkaline corrosion and humidity.
- 4.When installing, pay attention to the opening direction,the length of the conductor to the bottom box shall not exceed 10cm,Set aside at least 200mm of cable.
- 5.When installing and wiring,Product should avoid direct contact with corrosive liquid, gas (strong acid, strong alkali, paint).

Safety Warning:

- 1.This is a class I product and must be earthed
- 2.This product must be installed/wired by a qualified electrician
- 3.For indoor use only.
- 4.For concrete floor.