



Wenzhou Safewire Electric Co.,Ltd.
No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;
www.safewirele.com

Wenzhou Safewire Electric CO.,Ltd.

SPECIFICATION SHEET

PRODUCT NAME: Desktop socket

PRODUCT No. : FZ-501



FZ-501

ADD: 152 xingguang industrial zone, yueqing city, zhejiang province
(TEL) :0086-577-62799688
(E-mail): info@safewirele.com
(WEB): <http://www.safewirele.com>



Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com

Technical parameters & characteristic :

1) Working environment:

1. The environment temperature:-5°C~/40°C
2. The rated voltage : 100V~~250V
3. Rated current : 10A、 13A、 16A、 20A


2) Characteristic:

1	Model	FZ-501	6	HS Code	8536690000
2	Brand Name	Safewire or OEM brand	7	Market standard	Customized
3	Type	Desktop socket	8	Place of origin	Zhejiang , Wenzhou, China
4	Color	Silver/black/white	9	Frequency	50Hz~60Hz
5	Grounding	Standard grounding	10	Current Type	AC

3) Technical parameters :


Serial No.	Parameter	Description
1	Panel Material	Zinc alloy
2	Bottom box Material	Enginning PC
3	Socket material	Phosphor copper
4	Panel Dimension(mm)	Ø110
5	Cutout(mm)	Ø102
6	Base box dimension	Ø110*45
7	Capacity of modules /Interface size	3 ways (45*45mm)modules
8	Available Structure	Round/ Without coverplate/Concealed installation
9	Available modules	Type 45

Application:

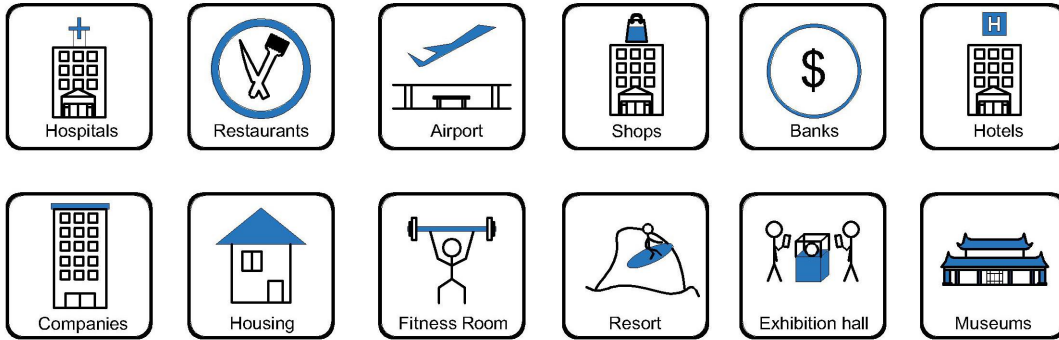


- Office and education
- Industry and Engineering
- Presentation and retail;
- Orientation and safety;
- Transit areas and parking;
- Hotels, hospitality and wellness;
- Health, sport and leisure;
- Art and culture;

CE certificate by TUV,Germany

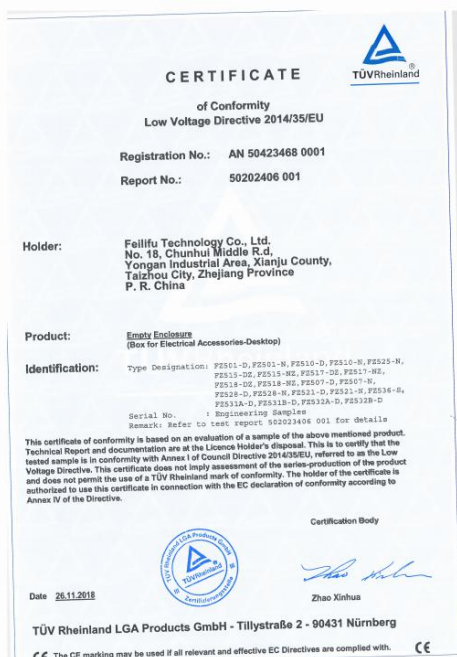

LVD test report

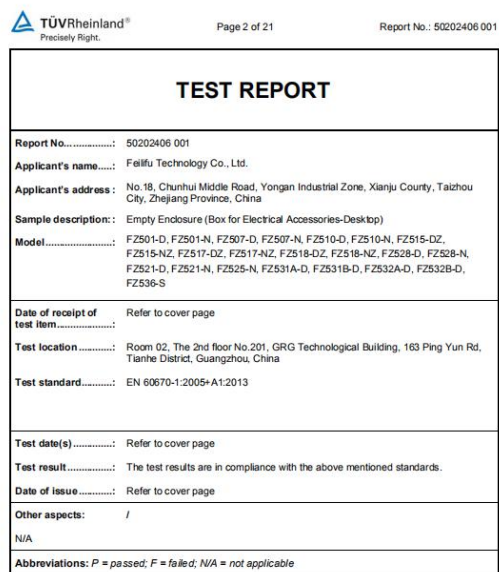

Product Show:



Features:

Grommets are sleeves which are installed into raised floor panels. They protect cables from being cut by the sharp edges created after cutting into a panel for wire access. In addition, they protect employee fingers from sharp panel edges.

Grommets are made from injected molded plastic resins designed for long-lasting wear and are resistant to chipping or breakage. They have a snap-in swivel lid that accommodates cables.

Remember a hole saw is required to cut the opening in a floor panel when using circular grommets.

1. Easy installation: Round shape to die out hole and save labor cost.
 2. More durable: The material of socket product body is from high quality zinc alloy by process of pressure casting as integration design. It be high intensity so more durable.
 3. More anti corrosion under heavy humidity environment: Surface of product is processed by power painting .
 4. More safety : Complete closed plastic bottom case and with conduit of cord .
- available for 45*45mm type international sockets or modules types:


SAFEWIRE

45 Type Function Accessories

F2	F3	F4	F11	F15	F16	F18		
F20F21F22F23F24F25F26	F50	F51	F52	F53	F55	F56	F58	F59
F60	F62	F65F66F67F68	F68	F71				

FZ-501 Outline drawing:

SAFEWIRE

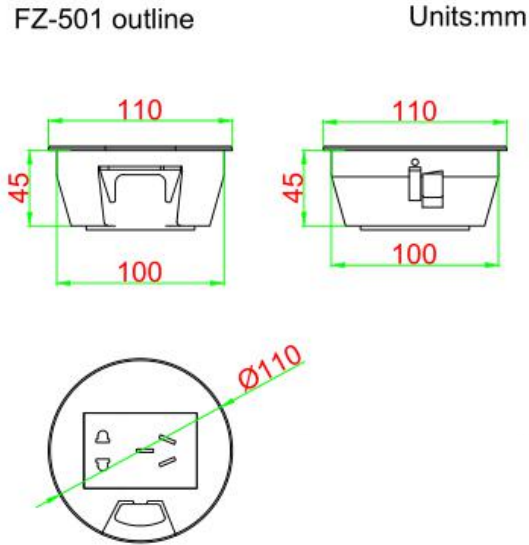

Package:18 Pcs inner box into a master carton.Poly bag with box packing.


SafeWire

Package solution




Installation Process


1. Cut out as specification sheet.
2. put the bottom box into cut-out hole,punch the self-tapping screw and fix the bottom box.
3. Remove plastic frame fixing socket modules.Assembly the socket or data Jack into the plastic frame and press frame ensure them combine tightly.
4. Keep socket modules connected by inner wire (it should be copper core 1.5mm²9~20 wire and length should be suitable).Then earthing and ensure inner wire tightly with modules.For fast connector terminal block,Just insert wire into block.
5. Phone line ,TV receiving line sound box wire (it should thin wire) Just the wire length and tighten stop screw comathen.

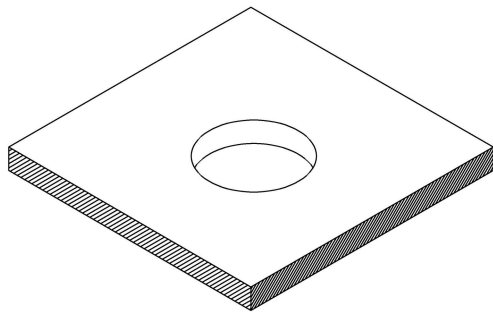

(1)



(2)



(3)

Attentions:

- 1.Prevent from corrosive liquid, gas (strong acid, strong alkali, paint)and humidity.
2. All dimension quoted are nominal only. Drawings , images and text are for illustrative perposes only and product details and dimension are subject to change without notice.

Safety Warning:

- 1)This is a class I product and must be earthed
- 2)This product must be installed/wired by a qualified electrician
- 3)before installation/maintnace ,ensure the mains supply is switched off and the circuit fuses are removed or circuit breakers switch off
- 4)For indoor use only



SAFEWIRE

Wenzhou Safewire Electric Co.,Ltd.

No.152 Xingguang Road, Xingguang industry zone, Liushi town, Yueqing, Wenzhou,China ,325604
Tel:0086-577-62799688; Email:info@safewirele.com;

www.safewirele.com
